


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

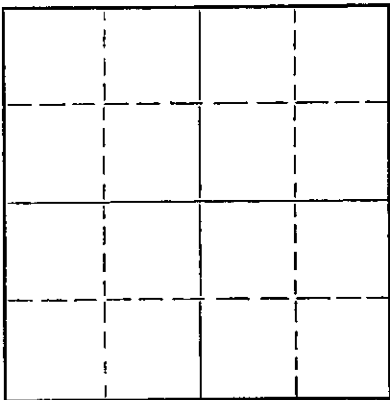

Locate well correctly on above
Section Plat

Barber County, Sec. 17 Twp. 31 Rge. 14 (E) W (W)
Location as "NE/CNW/SW" or footage from lines SE NW NW
Lease Owner Leslie Oil Co.
Lease Name Skinner D.W. Well No. 3
Office Address 612 Brown Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed February 23 19 49
Application for plugging filed June 18, 19 56
Application for plugging approved June 18 19 56
Plugging commenced June 28 19 56
Plugging completed July 2 19 56
Reason for abandonment of well or producing formation Depleted to Non-commercial well
If a producing well is abandoned, date of last production June 26, 19 56
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives, Pratt, Kansas
Producing formation Viola Depth to top 4379 Bottom 4387 Total Depth of Well 4387 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	90'	16"	90'	0
Surface		0	800'	10"	800'	0
Oil String	Top of Viola	0	4377'	5 1/2"	4377'	2995'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged hole back to 4366 with sand. Dumped by Bailor 5 sacks of cement slurry on top of sand plug from 4366 feet to above 4351 feet. Hole loaded with water. Shot pipe loose at 2995. Pulled pipe to approx. 1950 feet. Mixed 30 sacks of gel mud and circulated, using West Supply Co. Pump, until mud was thick. Kept hole full of mud while pulling remainder of pipe. Set rock plug at 300 feet. Put 25 sacks of cement on top of rock plug. Filled to 25 feet with mud and set rock plug. Filled to surface with cement.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Ben K. Kelley (employee of owner) RECORDS OPERATOR of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ben K. Kelley
612 Brown Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of July, 19 56

My commission expires Sept 21, 1959
Notary Public.

PLUGGING
FILE SEC 17 T 31 R 14 W
BOOK PAGE 71 LINE 35

JUL 11 1956
76-56
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

COMPANY: J. H. HUBER CORPORATION LOCATION: SE NW NW, 17-31S-14W
 CONTRACTOR: J. H. HUBER CORPORATION Barber County, Kansas
 FARM NAME: No. 3 SKINNER ELEVATION: 1649
 COMMENCED: 1-1-49 PRODUCTION: 264 barrels oil plus 43
 COMPLETED: 2-23-49 water/2 1/2 hours

CASING USED: 16" at 90' with 125 sacks
 10" at 600' with 500 sacks
 5 1/2" at 4377 with 300 sacks

Red bed & shalle 740
 Shale & shalle 915
 Red bed, shale & shalle 1555
 Shale & lime 1970
 Lime, broken 2050
 Lime, shale streaks 2135
 Shale & lime 2170
 Cherty lime 2188
 Shale 2205
 Lime & shale broken 2270
 Shale & lime 2715
 Brown lime & shale 2825
 Lime & shale 3040
 Lime broken 3120
 Lime & shale 3160
 Lime 3320
 Lime & shale 3515
 Sandy lime 3567
 Lime & shale 3820
 Shale & lime 3893
 Lime & shale breaks 3940
 Lime & shale 4020
 Lime 4200
 Lime & shale 4340
 Shale 4352
 Lime 4398
 Total depth 4398

SAMPLE TOPS:

D.S.D. 3615-25, open 15 minutes, gas in 9 minutes, recovered 60' of water, estimated 2 to 3,000 n.c.f., est. bottom hole pressure 13603.
 Viola 4359c, Correction... 4360 equals 4387 R.S.D. by strapped drill pipe. Drilled plug and cleaned out to rotary total depth 4387'. Tested 3/4 barrel oil per hour, washed with 200 gallons acid. Cleaned out, tested 1 1/2 barrel oil per hour, 1000 gallons acid with pilot 4379-87 (on vacuum) Recovered lead plus 25 barrels oil, fluid level standing at 1200' & casing pressure 3005. Flowed 4-5 barrels oil per hour, 1 1/2 water & 1 1/2 basic sediment/22 hours. Killed well with 60 barrels oil & drilled deeper to 4398. Stubbed lead & well flowed 4 barrels oil per hour/13 hours, 1 1/2 basic sediment & trace water, 2000 Acid, & flowed 64 barrels oil/5 hours. Flowing 12-14 barrels oil per hour with 2 1/2 basic sediment. Shut down overnight & flowed 70 barrels oil/4 hours. Flow potential 264 barrels oil/2 1/2 hours plus 43 water.
COMPLETE

STATE OF KANSAS)
) SS
 COUNTY OF SHEDDEN)

I, Edward A. Huffman, hereby certify that the above is a true and correct copy of the log on the No. 3 Skinner, located in the Southwest Quarter of the Northwest Quarter of the Northwest Quarter (SE NW NW) Section Seventeen (17), Township Thirty-one (31) South, Range Fourteen (14) West, Barber County, Kansas.

Edward A. Huffman
 Edward A. Huffman, District Manager
 J. H. HUBER CORPORATION

Subscribed and sworn to before me this 21 day of September 1949

Dorothy J. Lewis
 Notary Public

Commission Expires: Jun. 26, 1953

FILED
 J. H. HUBER CORPORATION

6-18-50
 CONSERVATION

PLUGGING
 FILE SEC. 17 T. 31 R. 35W
 BOOK PAGE 71 LINE 35A