

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

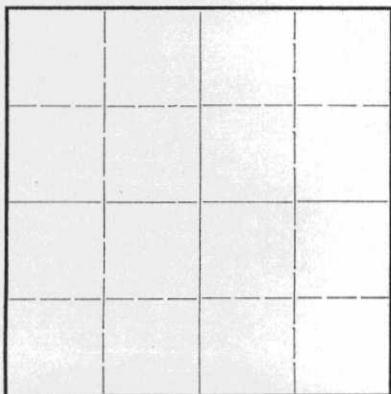

Locate well correctly on above  
Section Plat

Barber County. Sec. 17 Twp. 31 Rge. (E) 13 (W)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NW $\frac{1}{4}$  SW $\frac{1}{4}$   
Lease Owner. Pryor & Lockhart, Inc.  
Lease Name. Yoke Well No. 1  
Office Address. 820 Union National Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed. November 14, 1944  
Application for plugging filed. November 14, 1944  
Application for plugging approved. (by 'phone) November 14, 1944  
Plugging commenced. November 14, 1944  
Plugging completed. November 14, 1944  
Reason for abandonment of well or producing formation. dry hole.

If a producing well is abandoned, date of last production.....19.....  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr  
Producing formation..... Depth to top..... Bottom..... Total Depth of Well. 4700 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Arbuckle Lime</u>	<u>Dry</u>	<u>4629</u>	<u>4700</u>	<u>13" OD</u>	<u>220</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Heavy Mud 4700' to 230' then Bridged  
15 sax cement at 230'  
Heavy mud from top of cement to 10' below bottom of cellar  
Plug & bridge 10' below bottom of cellar  
10 sacks cement from 10' below bottom of cellar to top.

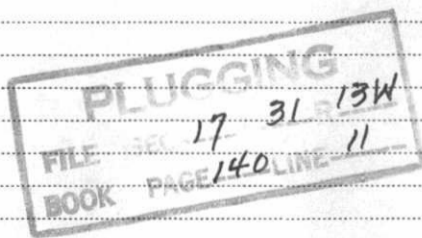

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Pryor & Lockhart, Inc.  
Address. 820 Union National Bank Bldg., Wichita, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
H. D. Lawver (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) By: H. D. Lawver  
PRYOR & LOCKHART, INC.  
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 18th day of November, 1944

Edith A. Williams  
Notary Public.

My commission expires March 22, 1948







FORMATION	FROM	TO	FORMATION	FROM	TO
Cellar	0	10	Shale & Lime	4193	4283
Red Rock	10	140	Lime	4283	4322
Shells & Red Rock	140	200	Shale	4322	4339
Lime	200	250	Shale & Lime	4339	4463
Red Shale	250	300	Lime	4463	4475
Red Rock	300	562	Chirt	4475	4485
Anhydrite	562	572	Lime	4485	4509
Sand	572	620	Shale & Lime	4509	4564
Shale	620	720	Sandy Lime	4564	4582
Red Rock	720	780	Shale & Lime	4582	4631
Shale	780	1220	Lime	4631	4700
Salt	1220	1390			
Shale	1390	1635	TOTAL DEPTH		4700
Lime	1635	1655			
Shale	1655	1725			
Lime	1725	1740	Geologist Top Arbuckle	4629	
Broken Lime Shale	1740	1885			
Sandy Lime	1885	1990			
Shale	1990	2015	Schlumberger Survey made @ 4700 T. D.		
Shale & Lime	2015	2060			
Broken Lime	2060	2068			
Sand	2068	2082			
Lime	2082	2170			
Shale	2170	2200			
Broken Lime	2200	2235			
Shale	2235	2265			
Lime	2265	2365			
Shale	2365	2390			
Lime	2390	2415			
Shale	2415	2490			
Lime	2490	2540			
Shale	2540	2565			
Lime & Shale	2565	2852			
Lime	2852	3086			
Lime Soft	3086	3147			
Lime	3147	3299			
Shale & Lime	3299	3450			
Broken Lime	3450	3488			
Lime	3488	3612			
Shale & Lime	3612	3726			
Sand	3726	3750			
Sandy Shale	3750	3768			
Shale	3768	3774			
Lime	3774	3818			
Sandy Lime	3818	3844			
Lime Soft	3844	3851			
Lime	3851	3883			
Lime Soft	3883	3916			
Lime	3916	4027			
Chirty Lime	4027	4045			
Lime	4045	4087			
Broken Lime	4087	4099			
Lime	4099	4178			
Chirty Lime & Shale	4178	4193			