

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

NORTH

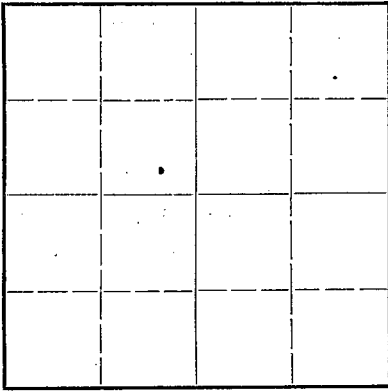

Locate well correctly on above Section Plat

Barber County. Sec. 24 Twp. 30 Rge. (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 330' N. & 330' W. of Cen.
Lease Owner. Cities Service Oil Company
Lease Name. Smith-Stumph Well No. 1
Office Address. Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed. December 29, 1946
Application for plugging filed. December 30, 1946
Application for plugging approved. December 30, 1946
Plugging commenced. December 30, 1946
Plugging completed. December 30, 1946
Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr
Producing formation. Arbuckle Depth to top. 4644 Bottom. 4676 Total Depth of Well. 4676 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	322'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud from 4676' to 300'
Wood plug and soil from 300' to 285'
15 sacks cement from 285' to 255'
Mud and soil from 255' to 25'
10 sacks cement from 25' to base of cellar.

FILE
BOOK 24 30-13W
PAGE 91-LINE 8-

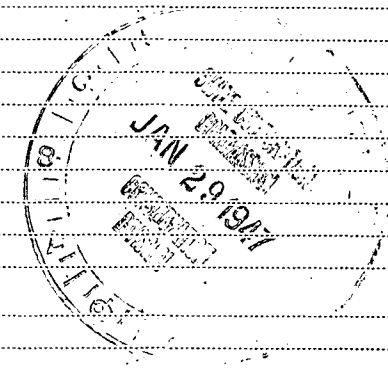

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Mr. R. C. Hauber
Address. Box 751
Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *V. M. Conover*
Box 751, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 31st day of December, 1946
W. G. Smith
Notary Public.

My commission expires March 12, 1947.

Company Glades Service Oil Co. Well No. 8 Farm Gratch-Jump
 Location 330' North and 330' West of Center Sec. 24 T. 30 R. 130
 Elevation 1747 (1745 Cor) County Duchesne State Kansas
 Drlg. Comm. November 26, 1946 Contractor Cordell-Bartow Drilling Company
 Drlg. Comp. December 29, 1946 Acid None
 T. D. 4676' Initial Prod. Dry Hole (P. & A. 11-30-46)

PERFORATION LOG:

10-3/4" @ 320' cor. 330' as cement

PERFORATION INTERVALS:

sand	0-25
red rock	00
conky red rock	195
red rock & hard sand	225
red bed	2040
red bed, shale & chert	2100
shale & chert	2200
shale & sand	1500
shale & chert	1710
lime	1705
shale & anhydrite	1670
broken lime	2035
lime & shale	2155
broken lime	2215
lime & shale	2270
broken lime	2470
lime & shale	2700
shale & lime	2940
shale	2950
shale & lime	2970
lime	3000
lime & shale	3045
broken lime	3225
shale & chert	3205
shale & lime	3440
lime & shale	3720
lime	3760
shale	3710
lime	3765
sand & lime	3805
lime	3811
lime & shale	3804
lime	4270
lime & shale	4205
shale	4210
lime & shale	4217
shale	4345

shale & lime	4207
shale	4272
shale & lime	4434
lime	4476
lime & shale	4485
lime	4503
shale	4513
lime & shale	4600
shale & sand	4572
shale, sand & lime	4570
shale	4610
lime & shale	4623
shale	4633
lime & shale	4605
lime	4676 P. D.


Top Viola	4480'
Top Artichoke	4644'
Penetration	12'
Total Depth	4676'

Small open test 4481-44, recovered 60' and in 30 mins.

TESTS MADE (AS PER LOGS):

500'	OK
1000'	OK
1500'	OK
2000'	OK
2500'	OK
3000'	OK
3500'	OK
4000'	OK

9" rotary hole.

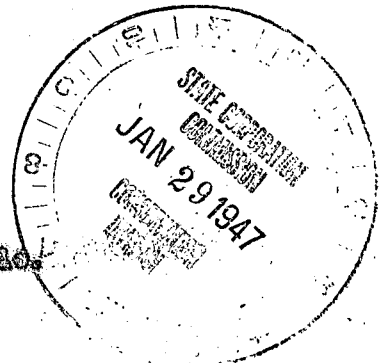

PLUGGING
 FILE 24 30 (130) 345
 BOOK PAGE 91 LINE 8