


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

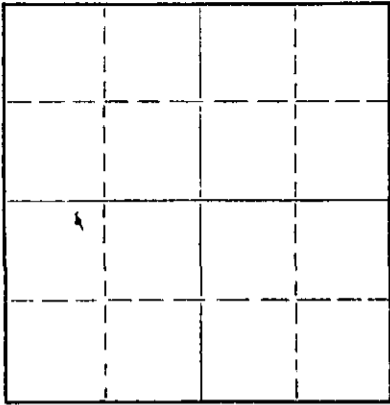

Locate well correctly on above
Section Plat

Barber County. Sec. 17 Twp. 34 Rge. (E) 12 (W)
Location as "NE/CNW/SW" or footage from lines 75' N of C of NE NW SW
Lease Owner The Atlantic Refining Company
Lease Name V. L. Cook "A" Well No. 1
Office Address 830 Kennedy Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-19 1956
Application for plugging filed 5-19 1956
Application for plugging approved 5-19 1956
Plugging commenced 5-19 1956
Plugging completed 5-19 1956
Reason for abandonment of well or producing formation Drilling Well - Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives, Box 8, Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4795 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Elgin		3553		8-5/8"	240.40'	None
Heebner		3783				
Toronto		3809				
Douglas		3854				
Lansing		4000				
Kansas City		4296				
Cherokee		4656				
Congl. Miss.	small amt. gas	4680	TD			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Went in with 4-1/2" drill pipe to 4772 feet, circulated out. Pumped 15 bbls. water ahead and mixed 100 sacks Victor Portland cement. Displaced cement plug with 5 bbls. water and 58 bbls. mud. Bottom of cement plug, 4772. Top of cement plug, 4447'. Pulled out of hole, laid down drill pipe and removed blowout preventer. Dropped 1/4 sack of hulls and HOWCO plug (wood), pushed to 250 feet. Picked up to 241 feet and pumped one bbl. water ahead of 20 sacks Victor Portland cement and 1/2 bbl. water behind, set plug from 241 to 180 feet. Laid down drill pipe and pushed HOWCO plug to 35 feet and circulated cement to the surface with 11 sacks cement. Plugged back to surface at 6:30 p.m., 5-19-56.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Corbett Drilling Company
Address P. O. Box 4206, Tulsa, Oklahoma

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.
J. E. Hellinghausen (employee of owner) or ~~(Notary Public)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. E. Hellinghausen
J. E. Hellinghausen, Regional Drilling Manager
830 Kennedy Building, Tulsa, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of June, 1956

Wanda Davis
Wanda Davis
Notary Public.

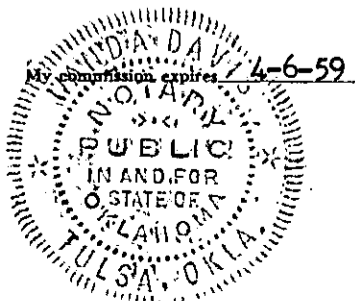

PLUGGING
FILE SEC. 17 T. 34 R. 12W
BOOK PAGE 62 LINE 45

RECEIVED
STATE CORPORATION COMMISSION
JUN 22 1956
6-22-56
CONSERVATION DIVISION
Wichita, Kansas

