


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-007-00406-0000

WELL PLUGGING RECORD

NORTH

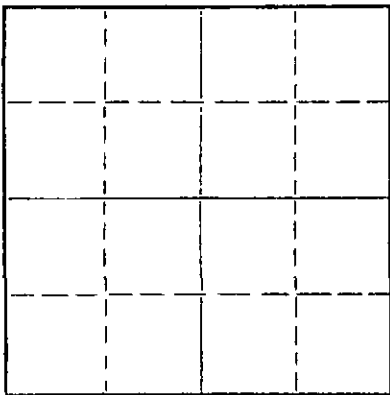

Locate well correctly on above  
Section Plat

Barber

County. Sec. 2 Twp. 32S Rge. 15 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW SE

Lease Owner National Cooperative Refinery Association

Lease Name Skinner "C"

Well No. 1

Office Address 305 Rule Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 30, 1957

Application for plugging filed May 31, 1957

Application for plugging approved June 3, 1957

Plugging commenced May 30, 1957

Plugging completed May 30, 1957

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Depth to top Bottom Total Depth of Well 4991 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	210'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole to 205', set Halliburton plug 1/2 sack hulls 20 sacks of cement to 155'. Mudded hole to 35', set Halliburton plug 1/2 sack hulls 10 sacks of cement on up to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Aylward Drilling Company  
Address First National Bank Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
C. R. Sears

(employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. R. Sears (C. R. Sears)

305 Rule Building, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of June, 1957

My commission expires November 26, 1960

Nell McComb

Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION

JUN 11 1957  
6-11-57  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
FILE SEC 2 T 32 R 15W  
BOOK PAGE 16 LINE 36

SKINNER "G" #1

Casing Records:

8 5/8" - 210'

Company: National Coop. Refinery Ass'n &  
Aylward Drilling Company

Contractor: Aylward Drilling Company

Commenced: May 8, 1957

Completed: May 30, 1957

Location: SE NW SE 2-32-15W  
Barber County  
Kansas

Elevation: 1914 DF 1917 KB

	From	To	Remarks
Red Rock	0-	125	Set 8 5/8" surf. pipe @ 210' w/150 sacks cement.
Shale	125	280	
Shale and red bed	280	1024	
Red bed and shale	1024	1070	DST 4041-62 Open 1 hr. Shut in 20 min.
Red bed and rock	1070	1110	Rec. 300' gas & 65' sl. GCM. FP 304 - 454.
Salt	1110	1155	IBMP No good, FBMP 1704.
Red bed and red rock	1155	1290	
Red rock and shale	1290	1480	DST 4112-29 Open 1 hr. Shut in 20 min.
Shale and lime	1480	1680	Rec. 7' mud. FP 334-334, IBMP 474
Lime and shale	1680	2195	FBMP 404
Lime	2195	2242	
Lime and shale	2242	2345	DST 4191-4205 Open 1 hr. Shut in 20 min.
Lime	2345	2450	Rec. 30' hvy. GCM. OC. FP 04-1004
Lime and shale	2450	2865	IBMP 04 - FBMP 2204.
Shale with some lime	2865	2975	
Lime and shale	2975	3065	DST 4207-30 Open 1 hr. Shut in 20 min.
Lime with shale	3065	3280	Rec. 635' sl. GCM. FP 1654 - 3704.
Shale and lime	3280	3375	IBMP 16504, FBMP 14604.
Lime and shale	3375	3735	
Sand	3735	3750	DST 4355-75 Open 1 hr. Shut in 20 min.
Lime with shale	3750	3800	Rec. 2200' gas, 95' GCM. FP 404 - 654.
Sandy lime and shale	3800	3928	IBMP 16404, FBMP 8604.
Lime and shale	3928	4030	
Lime and sand	4030	4062	DST 4817-41 Alerun - plugged tool.
Sand and lime	4062	4150	
Lime, mostly	4150	4181	DST 4817-41 Open 1 hr. Shut in 20 min.
Lime	4181	4480	Rec. 13' mud. FP 04 - 04. BWP 04 - 04.
Lime and shale	4480	4522	
Lime with shale	4522	4575	DST 4840-70 Open 1 hr. Shut in 20 min.
Lime and shale	4575	4630	Rec. 19' mud. FP 144 - 204.
Lime	4630	4774	IBMP 424 - FBMP 424.
Lime and shale	4774	4816	
Lime	4816	4870	
Chert & shale	4870	4903	
Lime and chert	4903	4934	
Lime	4934	4955	
Shale and sand	4955	4975	
Sand	4975	4991 T.D.	D & A

## GEOLOGICAL TOPS:

Neeshner	3951
Toronto	3987
Douglas	4008
Douglas Sand	4039
Lansing	4128
W/Kansas City	4532
Rosney	4598
Viola	4826
Stinson Shale	4944
Stinson Sand	4946
RTD	4991

PLUGGING	
FILE SEC	2 T. 32 15W
BOOK PAGE	16 L. 36

REC-1  
STATE COMMISSION

6-18-57

CONSERVATION

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

Subscribed and sworn to before me this 11th day of June, 1957.

My commission expires December 11, 1957

*Paul W. Stearns*  
*Duane Jessup*  
 DUANE JESSUP Notary Public