

15.033-10034-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

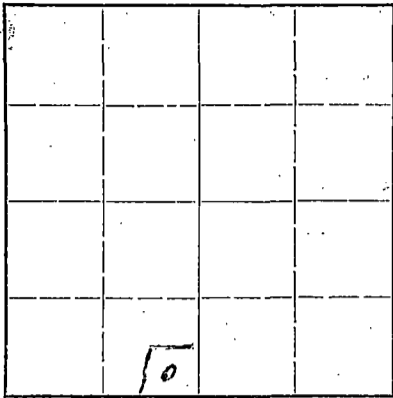

Locate well correctly on above
Section Plat

Comanche Co. County. Sec. 27 Twp. 31 Rg. NW (E) T8 (W)
Location as "NE1/4NW1/4SW1/4" or footage from lines Center S.E. 1/4 S.W. 1/4 A & KCC
Lease Owner United Producing Co., Charleston, West Virginia
Lease Name Boisseau Well No. 1
Office Address
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5/13/45 19.
Application for plugging filed 6/11/45 Verbal 19.
Application for plugging approved 6/11/45 Verbal 19.
Plugging commenced 6/12/45 19.
Plugging completed 6/19/45 19.
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production X 19.
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well H.W. Kerr
Producing formation None Depth to top Bottom Total Depth of Well 6008' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface sand and gravel	Fresh water	0	270'	13 O.D.	29'	None
				10 3/4"	1087'	None
				7"	5868	3577'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded hole from bottom to 250' of top
Dumped 15 Sx. cement at 250' and mudded hole to 20' of top hole.
Dumped 10 Sx. cement filled casing and bottom cellar



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Harbar Drilling Co.
Address 1019 Central Bldg. Wichita Kansas

STATE OF _____, COUNTY OF _____, SS.

(employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

(Address)

SUBSCRIBED AND SWORN to before me this 24th day of June, 1947

Mary R. Brann
Notary Public.

My commission expires Dec 23, 1950

PLUGGING
FILE SEC 27 T 31 R 18 W
BOOK PAGE 17 LINE 16

15-033-10034-0000


HARBAR DRILLING COMPANY

BOISSEAU #1

C SE 1/4 NW 1/4 27-31-18, Comanche County, Kans.

Ran 15 Jts., 307', 13" O.D. Casing - set @ 294. Cemented with 250 sacks cement and 3 sacks calcium chloride
 Rigging up 11-22-44
 Tearing down 3-31-45

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface clay	0	40	
Sand	40	245	
Shale & Shells	245	300	
Red Rock Shells	300	490	
Shells & Shale	490	875	Slope test @ 500' - O.K.
Shale & Lime Shells	875	1040	
Lime & Shells	1040	1080	
Anhydrite	1080	1105	
Shale & Shells	1105	1445	
Shale	1445	1550	
Shale & Shells	1550	1630	
Shale - Lime	1630	1730	
Lime Shells & Shale	1730	1820	Slope test @ 1750 - Jetted Pitt
Lime & Shells	1820	1905	Slope test @ 1900' - O.K.
Lime - Shale	1905	1995	
Lime	1995	2185	
Shale	2185	2215	
Lime Shells	2215	2360	
Lime - Shale	2360	2360	
Lime	2360	2410	Slope test 2350 - O.K.
Lime - Shale	2410	2485	
Lime - Shale	2485	2515	
Lime Pyrite	2515	2545	
Lime	2545	2815	Slope test @ 2750' - O.K.
R. Lime	2815	2830	
Lime & Shale	2830	2875	
Lime & Shale	2875	2905	
Lime H.	2905	2925	
Broken	2925	2935	
H. Lime	2935	2940	
Lime	2940	3100	
Lime - Shale	3100	3180	
Lime	3180	3275	Slope test @ 3200' - O.K.
Lime - Shale	3275	3320	
Lime	3320	3515	
Lime Shells & Shale	3515	3555	
Lime	3555	3625	
Shale	3625	3650	
Lime & Shale	3650	3670	
Pyrite	3670	3680	
Lime	3680	3840	Slope test @ 3750' - O.K.
Lime Med.	3840	3856	
Soft	3856	3866	
H. Lime	3866	3870	
Lime Med.	3870	3985	
Shale & Lime	3985	4105	
Lime	4105	4270	Slope test @ 4270' - O.K.
Hard Lime	4270	4280	
Lime	4280	4340	
Hard	4340	4350	
Medium	4350	4365	
Soft	4365	4380	
Medium	4380	4400	
Hard	4400	4410	
Hard Lime	4410	4445	
Lime	4445	4868	
Shale	4868	4875	
Lime	4875	4990	
Lime & Shale - rough	4990	5020	
Smooth	5020	5030	
Slightly rough	5030	5040	

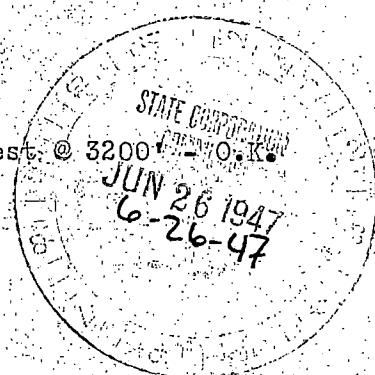

PLUGGING
 FILE SEC 27 31 R 18 W
 ROCK PAGE 17 LINE 16

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Lime & Shale	5040	5058	
Lime & Shale	5058	5077	
Lime	5077	5109	
Lime & Shale	5109	5115	
Miss. Lime	5115	5147	Drill stem test
Lime	5147	5157	
Lime	5157	5214	
Lime & Sherty Streaks	5214	5230	
Lime	5230	5255	
Lime & Chert	5255	5294	
Lime - hard	5294	5342	
Lime Chert	5342	5350	Reaming 12 1/8" hole from 297 to 1987
Lime	5350	5445	
Lime & Shale	5445	5460	
Lime	5460	5525	
Lime & Shale	5525	5536	
Lime Cherty	5536	5541	
Lime	5541	5548	
Hard Cherty Lime	5548	5558	
Chert	5558	5561	
Cherty Lime	5561	5589	
Lime	5589	5686	
Lime & Chert	5686	5719	
Lime	5719	5835	
Lime Shale	5835	5841	
Lime	5841	5880	
Something hard	5880	5881	
Lime	5881	5887	
Sandy Lime	5887	5894	
Lime	5894	5910	
Shale & Sand	5910	5917	
Lime	5917	5927	
Lime & Shale	5927	5953	
Shale & Sand Shale	5953	5970	
Lime	5970	6008	T.D.



I, W. A. Grant, do solemnly swear that the above log is true and correct to the best of my knowledge.

W. A. Grant

Subscribed and sworn to before me and in my presence this 24th day of May, 1945.

Margaret O. Reilly
Notary Public

My commission expires 4-7-47