

15-151-10648-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pratt

County. Sec. 30 Twp. 26S Rge. 12W (E) (W)

Location as "NE/CNW%SW%" or footage from lines. SW NE NW

Lease Owner The Texas Company

Lease Name R. D. Petrowsky Well No. 4

Office Address 614 Bitting Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed September 2 19 43

Application for plugging filed April 15 19 57

Application for plugging approved April 16 19 57


Plugging commenced April 27 19 57

Plugging completed April 28 19 57

Reason for abandonment of well or producing formation Ceased to be a commercial producer

If a producing well is abandoned, date of last production September 19 52

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

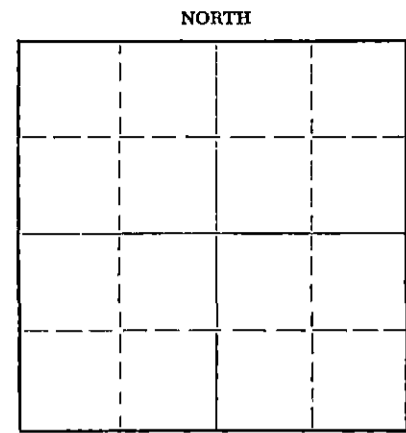

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. M. A. Rives

Producing formation Lansing Depth to top 3867 Bottom 3872 Total Depth of Well 4343 Feet

Show depth and thickness of all water, oil and gas formations. PBTD 3887

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	557	0'
				7"	4335	82 jts

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3887' to 3850' - Sand
 3850' to 3830' - 5 Sacks Cement
 3830' to 300' - Heavy Mud
 300' to 290' - Rock Bridge
 290' to 250' - 20 Sacks Cement
 250' to 30' - Heavy Mud
 30' to Bottom of Cellar - 10 Sacks Cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor R & S Pipe Pulling Company

Address Box 192, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. M. C. Harrell

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. C. Harrell

614 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of May 19 57

My commission expires September 20, 1960

Howard Kistler
RECEIVED
STATE CORPORATION COMMISSION
Notary Public.

MAY 7 - 1957
57-57
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 30 T. 26 R. 12W
BOOK PAGE 6 LINE 11

LOG OF WELL

R.D. PETROWSKY LEASE

SHEET **1**

OWNER **The Texas Company** DIVISION **Oklahoma-Kansas** DATE MADE **12-13-43**
 DISTRICT **Kansas** LEASE **R. D. Petrowsky** WELL NO. **4**
 STATE **Kansas** COUNTY OR PARISH **Pratt** TWP. **26N** RANGE **12W** SEC. **30**
 LOCATION OF WELL **Northwest quarter - Center SW-NE-NW 1048.5' from N-Line and 951' from East Line**
 COMMENCED RIGGING UP **8-22-43** COMMENCED DRILLING **8-23-43** COMPLETED DRILLING **9-2-43**
 DAY DRILLER _____ NIGHT DRILLER _____ CONTRACTOR **Parker Drilg. Co. Tulsa, Okla.**
 CABLE FROM **4338'** TO **4343'6"** ROTARY FROM **Top** TO **4338'** COMPANY RIG NO. _____
 TOTAL DEPTH **4343'6"** MEASURED BY **M. C. Harrell** ELEVATION _____

CASING RECORD

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS		
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	SET AT
10-3/4" OD	82 1/2 - 3-Ga.	557'										FT.
7" OD	83 20#	4335'										FT.
												FT.
												FT.
												FT.
												FT.
												FT.
												FT.
												FT.

WAS CEMENTED? **10-3/4" set w/150 Bags Cement - 7" OD set w/150 Bags Cement**
 LINER: STATE SIZE AND WEIGHT _____ WHERE GET _____ FT. AND INS. BLANK _____ FT. AND INS. PERFORATED _____
 HOW PUT TOGETHER _____ COUPLING _____ FLUSH-JOINT _____ INSERTED _____
 REMARKS: _____

EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.
							PLUGGING FILE SEC. 30 T. 26 R. 12W BOOK PAGE 6 LINE 11

FLOWING, PUMPING, GASSEY OR DRY **Pumping** PRODUCTION FIRST 24 HOURS _____ PRODUCTION SETTLED _____
 IF GAS WELL, OPEN FLOW CAPACITY _____ SHUT IN PRESSURE _____ ROCK PRESSURE _____
 KIND OF SHOT _____ SIZE OF SHOT, QUARTS _____
 NUMBER OF SHELLS _____ SIZE OF SHELLS _____ INCHES, DIAMETER _____
 LENGTH OF SHELLS _____ FEET _____ INCHES _____ TOP OF SHOT _____
 BOTTOM OF SHOT _____ ANCHOR _____ WELL BRIDGED TO _____
 TOTAL DEPTH OF WELL _____ NUMBER OF SHOT _____ PRODUCTION BEFORE SHOT _____ BBLs. PER DAY _____
 PRODUCTION AFTER SHOT _____ BBLs. PER DAY. SHOT FURNISHED BY _____
 NAME OF SHOOTER _____ SHOT INSPECTED _____ BY _____ (COMPANY EMPLOYEE)
 COMMENCED DRILLING DEEPER _____ COMPLETED _____ DRILLING DEEPER _____
 TOTAL DEPTH _____ PRODUCTION FIRST 24 HOURS _____ PRODUCTION SETTLED _____

REMARKS: **Pumping Potential 650 Bbls, Oil and 25% Water**
5-7-57

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS, WHEN, HOW, AND BY WHOM PLUGGED. STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG. IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT WRITE ON BOTTOM OF LAST SHEET OF LOG.

LOG OF WELL

SHEET No. 2

District **FRATT**

Owner **THE TEXAS COMPANY** Farm R. D. **RETROTSKY**

Well No. **4**

FORMATION	AMOUNT	COLOR	HARD OR SOFT	DEPTH CORES TAKEN	REMARKS
Clay, sand & gravel	150				Bl. 1929
Sand & red bed	545				Arbuckle 4334
Red bed	600				
Red bed	760				
Shale & red bed	1035				Run 14-5ts. 10-3/4" 3-6a. S-W casing and set at 557' w/ 450-sacks cement.
Shale, shells, sand	1304				
Shale, shells	1838				
Shale, lime	1940				
Shale, lime shells	2065				
Lime, shale	2490				
Lime	2496				
Shale	2616				
Lime-shale	2792				
Shale	2850				
Forus lime	2926				
Lime-shaley lime	2998				
Lime	3200				
Broken lime-shale	3296				
Lime	3442				
Lime-shale	3520				
Lime	3590				
Lime-shale	3628				
Lime	3676				
Lime-shale	3756				
Lime	4070				
Lime-chert	4105				
Chert	4128				
Chert lime	4164				
Chert	4165				Sto 7"OD 20# 98 casing at 4335' w/150-sacks cement.
Lime	423 6				
Lime-shale	4260				
Lime	4280				
Shale	4290				
Shale-lime	4338				
Lime	4343 1/2				

11-24-51 Plugged back to 3.87' depth - 2867-72. Pumped 21 BOPD + 30 cu. yd.

PLUGGING
FILE SEC. 30 T. 26 R. 12W
BOOK PAGE 6 LINE 11