


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

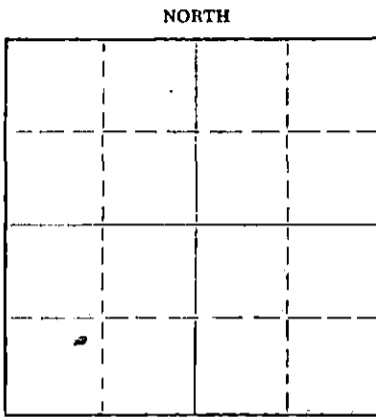

Locate well correctly on above Section Plat

Pratt County, Sec. 30 Twp. 26S Rge. 12W (E) (W)
Location as "NE/CNW/SW" or footage from lines N 1/2 SW 1/4
Lease Owner LYONS PIPE & SUPPLY COMPANY
Lease Name R. PETROWSKY Well No. 1
Office Address _____
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced March 27, 1965 19____
Plugging completed March 31, 1965 19____
Reason for abandonment of well or producing formation Dry -
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well ARCHIE V. ELVING PRATT, KANSAS
Producing formation Arbuckle Dolomite Depth to top _____ Bottom 4306- Total Depth of Well 4308 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-------------------|----------------------------|------|----|------------------|-------------|----------------|
| Arbuckle Dolomite | Surface pipe oil string | | | 8 7/8" 4 1/2" | 810 4285 | None - 1536 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged, back with sand to 3275-feet, dumped 3- sacks Cement.
Set a Rock -Bridge at 300-feet, dumped 25- sacks Cement.
Mudded hole up to 40- feet, Set a rock Bridge at 40- feet--
dumped ten sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

APR 2 1965
4-2-65

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor LYNCH CASING PULLING COMPANY. NO. 457
Address R.R. # 4 GREAT BEND, KANSAS

STATE OF _____, COUNTY OF _____, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature)

H.R. Buckston
P.O. Box 581 Lyons Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 1 day of April, 19 65

Frances Phelps
Notary Public.

My commission expires 7-11-67

15-151-10642-0000

WEEKLY DRILLING REPORT

| | | | | |
|------------------|----------------|-------------------------------|---------------------|-------------------|
| SHELL | | LEASE <u>R. PETROWSKY "A"</u> | | Well No. <u>1</u> |
| (COMPANY) | | DISTRICT <u>CARMI</u> | Elev. <u>1928</u> | |
| From <u>5-13</u> | To <u>5-25</u> | County <u>PRATT</u> | State <u>KANSAS</u> | |
| | | Parish } | | |

WELL DATA

| DATE | DEPTH | | FORMATION (FROM SAMPLES) | REMARKS |
|---------|-------|------|-----------------------------|--|
| | FROM | TO | | |
| 5-13-43 | | | | Rigging up. Spud 5-13-43 @ 10:00 A.M. |
| | 0 | 90 | Sand | Mix mud. Lost circulation. Wait- ing on water. |
| 5-14-43 | 90 | 150 | Sand | Mix mud. |
| | 150 | 509 | Sand & shale | |
| 5-15-43 | 509 | 690 | Red bed & sand | |
| | 690 | 817 | Red bed | |
| | TD | 817 | Red bed | 800' of 8 5/8" OD, 28#, 10th S.R. lapweld csg. cem. @ 810 with 100 sax Lone Star. No cem. returns WCCS & rigging up. Cemented around top of 8 5/8" csg. with 35 sax. Cemented top of 8 5/8" csg. with 26 sax by Halliburton. |
| 5-16-43 | | | | |
| 5-17-43 | | | | |
| | 817 | 951 | Red bed | |
| | 951 | 1141 | Shale | |
| | 1141 | 1400 | Shale & salt | Syfo 500' - 1°; 1000' - 1°. |
| 5-18-43 | 1400 | 1732 | Salt & shale | Syfo 1500' - 1°. |
| | 1732 | 1825 | Lime & shale | |
| | 1825 | 1891 | Shale, sand & lime | |
| 5-19-43 | 1891 | 2068 | Shale & lime | |
| 5-20-43 | 2068 | 2241 | Lime & shale | Syfo 2000' - 1 1/2°. |
| 5-21-43 | TD | 2241 | Lime & shale | Repair rig. |
| | 2241 | 2247 | Lime & shale | |
| 5-22-43 | 2247 | 2467 | Shale & lime | Mix 17 sax Aquagel. |
| 5-23-43 | 2467 | 2690 | Shale & lime | Mix 4 sax Aquagel. |
| 5-24-43 | 2690 | 2758 | Shale | |
| 5-25-43 | TD | 2758 | Shale | Repairing rotary table. Repairing rig. |

RECEIVED
STATE CORPORATION COMMISSION

MAR 23 1965
3-23-65
CONSERVATION DIVISION
Wichita, Kansas

CORRECT T. Ockerhausen
EXPLOITATION ENGINEER

APPROVED W. M. Gholson
SUPERINTENDENT

15-151-10642-0000

WEEKLY DRILLING REPORT

| | | | | |
|-----------------|---------------|--------------|----------------------------------|---------------------|
| (COMPANY) | | | LEASE <u>W. PATTON & SON</u> | Well No. <u>1</u> |
| | | | DISTRICT <u>OSAGE</u> | Elev. <u>1021</u> |
| From <u>-26</u> | To <u>6-2</u> | 19 <u>43</u> | County <u>OSAGE</u> | State <u>KANSAS</u> |
| | | | Parish <u></u> | |

WELL DATA

| DATE | DEPTH | | FORMATION (FROM SAMPLES) | REMARKS |
|---------|-------|------|-----------------------------|--|
| | FROM | TO | | |
| 5-26-43 | TD | 2758 | Shale | Installed rotary table. Mix 30 Zoogel & 2 lime. |
| | 2758 | 2896 | Shale & lime | Mix 2 Zoogel. Drilling 6" hole. |
| 5-27-43 | 2896 | 3075 | Shale & lime | Mix 6 Zoogel. |
| 5-28-43 | 3075 | 3190 | Lime & shale | Cyfo 3000' - 00. |
| | 3190 | 3332 | Lime | Mix 6 Zoogel. |
| 5-29-43 | 3332 | 3385 | Lime | Mix 8 Aquagel. |
| | 3385 | 3551 | Shale & lime | Mix 1 Aquagel. |
| 5-30-43 | 3551 | 3702 | Shale & lime | Mix 5 Zoogel & 11 Aquagel. TOP LANSING KANSAS CITY 3000 (-1757). |
| 5-31-43 | 3702 | 3739 | Lime | Mix 5 Zoogel. |
| | 3739 | 3756 | Lime & shale | |
| | 3756 | 3812 | Lime | Mix 5 Zoogel. |
| 6-1-43 | 3812 | 3828 | Lime | Mix 2 zoogel. |
| | 3828 | 3866 | S. L. Correction | |
| | 3866 | 3959 | Lime | Mix 7 Zoogel. |
| 6-2-43 | TD | 3959 | Lime | Repairing rig. |

RECEIVED
STATE CORPORATION COMMISSION

MAR 23 1965
3-23-65
CONSERVATION DIVISION
Wichita, Kansas

CORRECT T. Ockersmeyer
EXPLOITATION ENGINEER

APPROVED W. H. Gholson
SUPERINTENDENT

15-151-10642-0000

WEEKLY DRILLING REPORT

(COMPANY) _____ LEASE _____ Well No. _____
 DISTRICT _____ Elev. _____
 From _____ To _____ 19____ County { _____ State _____
 Parish { _____

WELL DATA

| DATE | DEPTH | | FORMATION (FROM SAMPLES) | REMARKS |
|--------|-------|------|-----------------------------|--|
| | FROM | TO | | |
| 5-2-43 | 3952 | 4051 | Line | Mix 12 sax Zeogel. Drilling 6 1/2" hole. |
| 5-4-43 | 4051 | 4075 | Line | Mix 14 sax Zeogel. |
| | 4075 | 4107 | Chart & line | |
| 5-5-43 | 4107 | 4129 | Chart | Mix 8 sax Zeogel. TOP VIOLA 4133(-2205). |
| | 4129 | 4148 | Line | |
| 5-6-43 | 4148 | 4177 | Line | Mix 6 sax Zeogel. Fish & recover drill collar & bit. |
| | TD | 4177 | Line | |
| | 4177 | 4197 | Line | Mix 2 sax Zeogel. |
| 5-7-43 | 4197 | 4247 | Line | Mix 16 sax Zeogel. |
| 5-8-43 | 4247 | 4275 | Line | TOP ALUMINUM LIME (corrected) 4285 (-2357). Running 4 1/2" casing. 4282' of 4 1/2" O.D., 9 3/8", 3 round threaded, new screw loss casing cemented @ 4258 with 633 sax Linc. 6 1/2" bulk cement mixed with 2% prehydrated cement & 1/2" sack Floodle by Halliburton 1 plug set. Mixed first 600 sax 12 1/2/gal. air last 33 sax 12 1/2/gal. Had circulation during entire job. Set plug @ 4260' with final pressure of 1070#. Plug mix 6:36AM. End mix 7:16AM. Set plug 7:11AM. Plug down at 7:13AM. Larkin float @ 4254. Larkin shoe @ 4288. Larkin casing controllers @ 3000, 3015, 3835, 3760, 3890. Intended cement with 300 sax. Discontinued cement after 300 sax mixed when motor turning; screw conveyor on bulk truck would not run. Tore out rotary tools. |
| | 4275 | 4300 | male & line | |
| | 4300 | 4307 | Line & streaks chart | |
| | 4307 | 4306 | S.L. Correction | |
| 5-9-43 | TD | 4306 | Dolomite | |

RECEIVED
STATE CORPORATION COMMISSION

MAR 23 1965
3-23-65
CONSERVATION DIVISION
Wichita, Kansas

CORRECT _____
EXPLOITATION ENGINEER

APPROVED _____
SUPERINTENDENT