


15-151-10689-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

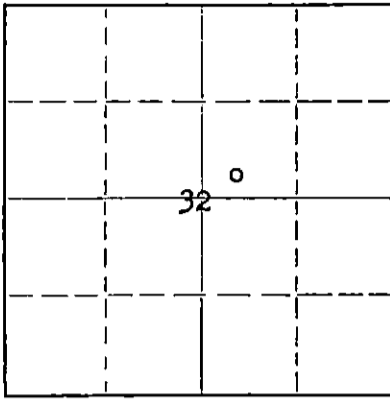

Locate well correctly on above  
Section Plat

Pratt County. Sec. 32 Twp. 26S Rge. (E) 12(W)  
Location as "NE/CNW&SW" or footage from lines SW SW NE  
Lease Owner Shell Oil Company  
Lease Name E. V. Miskimen Well No. 3  
Office Address Box 744, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed November 9 1943  
Application for plugging filed October 3 1957  
Application for plugging approved October 4 1957  
Plugging commenced October 16 1957  
Plugging completed November 7 1957  
Reason for abandonment of well or producing formation Oil Depleted

If a producing well is abandoned, date of last production March 21 1957  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives  
Producing formation Lansing-Kansas City Depth to top 3677 Bottom \_\_\_\_\_ Total Depth of Well 4305 Feet  
Show depth and thickness of all water, oil and gas formations. PB 3936

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Arbuckle</u>	<u>IP 3000 BO &amp; 0 wtr 24 hrs</u>	<u>4285</u>	<u>4305</u>	<u>8 5/8"</u> <u>4 1/2"</u>	<u>817'</u> <u>4285'</u>	<u>None</u> <u>865'</u>
<u>Lansing-Kansas City</u>	<u>IP 43 BO 43 BW 24 hrs</u>	<u>3828</u>	<u>3836</u>			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand from 3936 to 3825 & dumped 4 sax cement to 3777. Mixed & pumped in 20 sax mud to 240 & 20 sax cement to bottom of cellar.

RECEIVED  
STATE CORPORATION COMMISSION

JAN 31 11:00  
1-31-58

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Forbes Casing Pulling Co.  
Address Box 221, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.  
\_\_\_\_\_(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A W Weber  
Box 744, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of January, 19 58

LaMont Byers Jr  
Notary Public.

My commission expires January 28, 1961

LB

PLUGGING  
FILE SEC 32 T. 26 R. 124  
BOOK PAGE 50 LINE 43

SHELL-E. V. MISKIMEN #3  
SW SW NE Section 32-26S-12W  
Iuka-Carmi Field

Casing Record

0 - 152 clay, sand & shale  
550 sand & red bed  
715 red bed & shells  
738 red bed & anhydrite  
817 anhydrite & red bed  
1240 shale & shells  
1455 shale & salt  
1720 salt, shale & shells  
1797 anhydrite, shale & shells  
1860 lime & shale breaks  
1890 lime  
2140 lime & shale  
2180 lime, sandy  
2270 lime  
2392 lime & shale  
2470 shale & lime streaks  
2585 shale & lime  
2655 shale  
3218 shale & lime  
3330 lime  
3403 lime & sandy lime  
3491 lime  
3553 shale & lime  
3620 lime  
3645 lime & shale  
3895 lime  
3948 lime & shale  
3995 lime  
4032 lime & shale  
4050 lime  
4058 chert  
4089 lime & chert  
4093 chert  
4160 lime & chert  
4208 lime & shale  
4219 lime & sand  
4230 sand & lime  
4280 lime  
4305 dolomite TD  
3936 PB

Formation Tops

Topeka 3173  
Lansing-Kansas City 3674  
Viola 4113  
Simpson 4171  
Arbuckle 4280

8 5/8" cem 817 with 400 sax.  
\*4 1/2" cem 4285 with 800 sax; perf 4202-25,  
4182-92, 4068-82 & 3828-36. Replace top 560'.

Plug Back Information

Set CIBP at 4255.

PB to 4252 with rock & CalSeal.

Set Baker magnesium bridging plug at 623'.

Cut 4 1/2" casing & pulled 560'.

\* Ran 554' of 4 1/2" casing with Baash-Ross single  
slip casing packing bowl & spliced to casing  
in hole at 560'.

Drove plug to 4246 P.B.

Set Baker #43-A Model RT-8 retrievable cementer  
at 4181; hydrafraced; left all of packer  
below cone in hole; approx. 18" plus 16" of  
2" nipple; drillable material; cast iron &  
rubber.

Set CIBP at 4198.

PB to 4193 with 1/3 sack CalSeal.

Set CIBP at 4160.

PB to 4147 with 1 sack CalSeal.

Set CIBP at 3950.

PB to 3936 with CalSeal.

STATE OF MISSOURI  
DEPARTMENT OF REVENUE

OCT 2 - 1957  
18-4-57  
CONSERVATION DIVISION  
Topeka, Kansas

**PLUGGING**

FILE SEC. 32 T. 26 R. 12W  
BOOK PAGE 50 LINE 43