GEOLOGICAL DEPARTMENT

UNION GAS CORPORATION

INDEPENDENCE, KANSAS

PL.

27-[illegible]-25E

Company Southwestern Gas Company

S. T. R. 27-28-25
County Bourbon
State Kansas
Lease and Well No. Hausam #1

Contractor Union Gas Corporation

Drilling Commenced Apr. 10, 1928 Drilling Completed Apr. 12, 1928

Initial Production 73,000 cu. ft. Initial Rock Pressure

Location 330' W. and 330' S. of NE corner of NW¼ of Sec.

Casing 8" 8'

Robinson packer set 255'

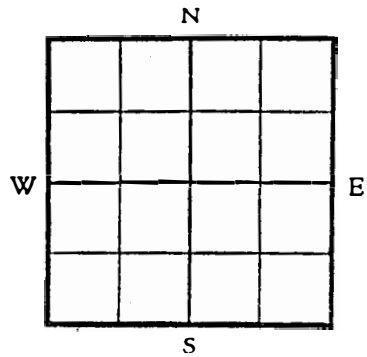

NE NE NW

NAD 83

KGS DRL 2023

Driller's Record of Formations

	soil	1	
7	yellow clay	8	
48	blue shale muddy	56	
1	" "	57	
8	lime black	65	
5	shale dark	70	red. hole
5	shale light	75	
4	lime hard	79	
5	shale black	84	
2	lime	86	
4	shale black	90	
30	shale light	120	
1	lime	121	
6	shale blue	127	
1	lime	128	
12	shale light	140	
6	shale black	146	
2	shells	148	
10	shale dark	158	
20	shale white muddy	178	
17	shale dark	195	
10	shale shelly dark	205	
7	shale light sandy	212	
3	sand light dry	215	
5	shale white	220	
11	sand dry	231	
16	shale light sandy	247	
5	sand dry	252	
2	slate black	254	
8	shale light S.L.M.	262	
8	sand	270	