


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas.

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH

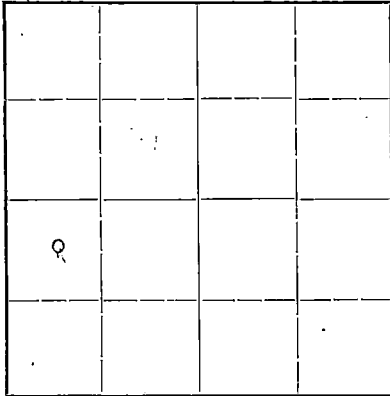

Locate well correctly on above
Section Plat

Harper County, Sec. 1 Twp. 34 Rge. (E) 6 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines Center NW $\frac{1}{4}$ SW $\frac{1}{4}$
Lease Owner H. M. Williams
Lease Name R. A. Lehman Well No. 1
Office Address 701 Bitting Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed April 7 19 42
Application for plugging filed April 13 19 42
Application for plugging approved April 13 19 42
Plugging commenced April 13 19 42
Plugging completed April 13 19 42
Reason for abandonment of well or producing formation Dry


If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation None Depth to top Bottom Total Depth of Well 5128 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Put In	Pulled Out
Lime shell		40	15 1/2"	150	
Anhydrite		1042	10"	1045	295'

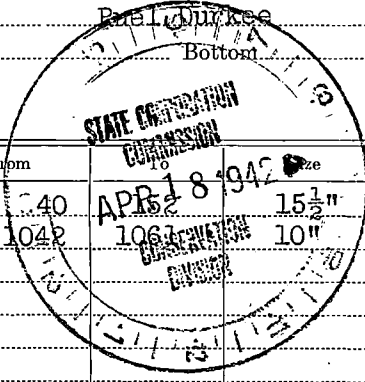

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Circulated heavy mud for 6 hours and hole bridged at 150' and cemented back to 135' with 15 sacks cement through drill pipe. Hole then filled with mud to 18' and cemented back to 8' with 10 sacks cement. Dirt from 8' or bottom of cellar to 0

Copy of log attached to Application for Well Plugging

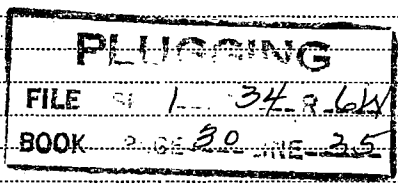

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to H. M. Williams
Address 701 Bitting Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
H. M. Williams (Employer or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. M. Williams
701 Bitting Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of April, 19 42
Notary Public.


My commission expires March 4, 1944

15-077-00631-0000

WELL LOG
 COMPANY FARM WELL NO LOCATION
 H. M. Williams R. Lahman 1. C NW SW 1-34-6 Harper County, Kansas

DESCRIPTION	DEPTH	FORMATION	DEPTH
Surface soil	6	lime & shale	4839
sand & gravel	40	shale	4854
red bed, lime shells, sand	152	lime & shale	4878
shale & shells	719	shale	4906
salt & shale	749	lime	4911
salt, shale & gyp	784	cherty lime & streaks of sand	4920
anhydrite, lime & shale	950	shale	4945
anhydrite broken	980	sand	4947
anhydrite	984	lime	4957
anhydrite & shale	1075	chert & sand streak	4963
sandy lime & brown lime	1187	lime	4966
anhydrite & lime	1205	chert & sand	4974
shale & lime	1305	lime	4980
shale streaks & hard sand	1425	sand	4987
sand	1470	lime & sand	5002
sandy lime & shale	1582	lime	5010
lime	1648	sand & shale	5030
shale & sand	1770	sand & lime	5052
sandy lime & shale	1895	sand & shale	5073
broken lime	1940	sand	5099
sand, shale & lime streaks	2060	lime (Arbuckle)	5128
broken lime & sand	2130		
shale	2190	Total depth	5128
sand & shale	2277		
broken lime & sand	2350		
broken lime	2420		
lime & shale	2565		
broken lime	2675		
shale	2735		
lime	2745		
shale & red bed	2812		
lime	2825		
shale	2835		
lime & shale	2898		
shale	3006		
sandy shale (soft)	3022		
shale & lime shells	3050		
shale & lime	3115		
shale	3120		
sandy lime (soft)	3135		
lime	3170		
shale	3185		
soft lime	3235		
lime & shale	3255		
shale	3532		
sand	3555		
shale	3685		
shale & sand streaks	3773		
brown lime (show of oil)	3787		
lime	3795		
Lime & shale	3845		
lime	3940		
lime & shale	4160		
lime & shale breaks	4205		
lime & shale	4330		
shale	4360		
shale (various colors)	4420		
shale & lime	4432		
chert & chert	4465		
cherty lime	4505		
lime	4525		
lime hard	4535		
shale & lime	4570		
lime	4590		
shale & lime	4595		
lime	4602		
brown lime & shale	4610		
lime	4621		
shale & lime	4646		
lime	4649		
shale & lime	4690		
lime (oolitic-soft)	4734		
lime	4754		
shale & lime	4772		
lime	4793		

15 1/2" surface casing set at 152' -Cemented
 10" surface casing set at 1045' - 200 sacks cem.

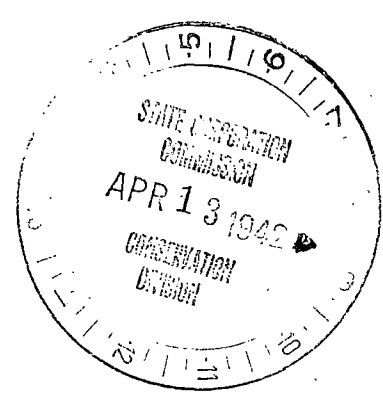

1 34 6W
 30 35