


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Meade County, Sec. 4 Twp. 34S Rge. 26 ~~W~~
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines
1000' FSL & 600' FEL
Lease Owner Getty Oil Company
Lease Name D. J. Wilson Well No. 2
Office Address 2705 Vine, Unit #4, Hays, KS 67601
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

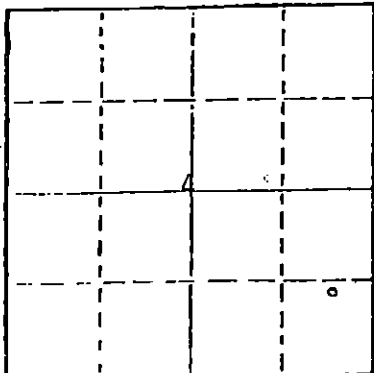

Locate well correctly on above
Section Plot

Date Well completed March 31, 1983
Application for plugging filed April 28, 1983
Application for plugging approved June 23, 1983
Plugging commenced July 4, 1983
Plugging completed July 9, 1983
Reason for abandonment of well or producing formation
No productive zones

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Paul Luthi
Producing formation Depth to top Bottom Total Depth of Well 4850' PBD
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				16"	75'	None
				8-5/8"	1163'	None
				4 1/2"	5884'	4162'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

RIH w/ shot and collar indicator. Shot off 4 1/2" OD, 10.5#/ft csg. @
4152'. Pulled 70 jts. csg. Spot 40 sks. cement @ 1202'. Pulled
15 jts. csg. Spot 40 sks. cement @ 595'. Pulled 14 jts. csg. Set
solid plug @ 40'. Dumped 10 sks. cement on plug. Top of cement
is 10' below GL. Hole loaded with gelled water between all cement
plugs. Cut csg. 3' below GL. Welded steel plate on top of csg.
Recovered total of 99 jts. (4161.65') of 4 1/2" csg.
Plugging complete 7-9-83.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Sargent's Casing Pulling Service

STATE OF Kansas COUNTY OF Ellis, ss.
Frank Renard (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Frank Renard
2705 Vine, Unit #4, Hays, KS 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of July, 1983

My commission expires

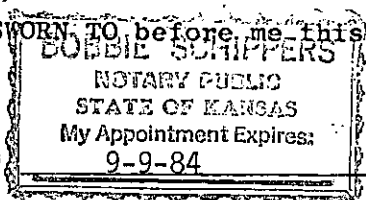

Bobbie Schippers
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

JUL 15 1983

CONSERVATION DIVISION
Wichita, Kansas

OPERATOR Getty Oil Company LEASE NAME D. J. Wilson #2 SEC. 4 TWP. 34S RGE. 26W

FILL IN WELL LOG AS REQUIRED:

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
			Set 16" O.D. conductor pipe at 86' w/ 7 cubic' yds of cement.	
Red Bed	86'	1170'		
Anhydrite	1170'	1176'	Set 8-5/8" O.D. csg at 1176' w/635 sx cement.	
Red Bed	1176'	1400'		
Lime & Shale	1400'	5900'	Set 4-1/2" O.D. csg at 5895' w/380 sx cmt	
Perfed Chester 5794'-97', 5770-72', and 5726'-46'			Tested water with occasional show of gas.	
Perfed Chester 5846'-5855'. Tested water with slight gas blow.				
Perfed Marmaton 5370'-5376'. Tested water.				
Perfed Lansing 4910'-4912' and 5150'-5160'. Tested water.				

RECEIVED
STATE CORPORATION COMMISSION

APR 29 1983

CONSERVATION DIVISION
Wichita, Kansas