

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Clark County, Sec. 9 Twp. 34 Rge. 22 (E) W (W)

Location as "NE/CNW&SW" or footage from lines C SE/4
Lease Owner Sterling Drilling Company
Lease Name Blackhall Unit Well No. 1
Office Address Sterling, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed May 7, 1966 19____
Application for plugging approved May 9, 1966 19____
Plugging commenced 5-19-66 19____
Plugging completed 5-21-66 19____
Reason for abandonment of well or producing formation Depleted.

NORTH

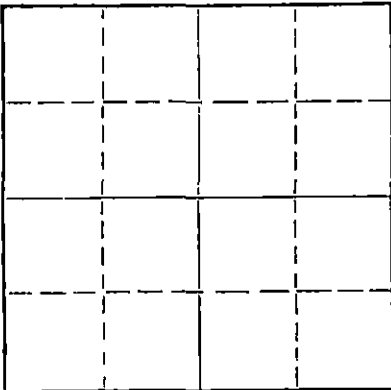

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5599 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	658'	None
				4-1/2"	5599'	4846'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, pumped 20 sacks of cement to 5220',
pulled 4 1/2" casing, checked fluid to 697', set rock
bridge and dumped 35 sacks of cement. Mudded hole
to 45' and ran 15 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

MAY 31 1966

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or ~~owner~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of May, 19 66

Milton J. Volin
Notary Public.

My commission expires May 20, 1968

STERLING DRILLING COMPANY
Sterling, Kansas

WELL LOG - - - - - BLACKHALL UNIT #1
LOCATED: C SE/4 Section 9-34S-22W, Clark County, Kansas

OWNER: Sterling Drilling Company, et al
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: January 4, 1966
COMPLETED: January 23, 1966

ROTARY TOTAL DEPTH: 5600'

LOG

0 -	45	Shale
45 -	70	Cement
70 -	115	Shale
115 -	310	Sand
310 -	640	Shale & Lime
640 -	1100	Shale & Red Bed
1100 -	1225	Shale & Shells
1225 -	1575	Shale & Lime
1575 -	1942	Shale
1942 -	3400	Shale & Lime
3400 -	3520	Lime
3520 -	3625	Shale & Lime
3625 -	3740	Lime
3740 -	3840	Shale & Lime
3840 -	3965	Shale
3965 -	4230	Shale & Lime
4230 -	4465	Shale
4465 -	4546	Lime
4546 -	4630	Shale & Lime
4630 -	5015	Lime
5015 -	5139	Lime & Shale
5139 -	5252	Lime
5252 -	5315	Lime & Shale
5315 -	5435	Lime
5435 -	5445	Lime & Shale
5445 -	5500	Lime, Shale & Sand
5500 -	5545	Lime
5545 -	5600	Lime & Shale T.D.

CASING RECORD

Ran 21 joints 8-5/8" new 24# seamless casing 645'. Cemented at 658' K.B. with 300 sacks 55-50 Pozmix, 2% gel, 2% c.c. followed by 100 sacks regular 2% c.c. Plug was down at 6:45 p.m.

RECEIVED
STATE CORPORATION COMMISSION

MAY 9 - 1966

CONSERVATION DIVISION
Wichita, Kansas

Ran 176 joints of 4-1/2" 9.5# J-55 8RD casing, set at 5599' K.B. with 150 sacks 50-50 Pozmix, 2% gel, salt blended. Shoe joint 31.30'. Plug down at 10:00 a.m. K.B. is 1341' above Braden Head. Total 4-1/2" used 5613.32'. Threads off. Centralizers at 5590', 5536', 5473', 5408'. Roto wall cleaners 5520' - 30'; 5542' - 50'; 5450' - 60'; 5428' - 38'.