

STATE OF KANSAS
STATE CORPORATION COMMISSION
130 S. Market, Room 2125
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-129-10393-0000

LEASE NAME Government

WELL NUMBER 1

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

4620 Ft. from S Section Line

660 Ft. from E Section Line

LEASE OPERATOR Executive Properties Inc.

SEC. 18 TWP. 34 RGE. 43 (E) or (W)

ADDRESS 1715 West 58th, Amarillo, Tx 79110-3401

COUNTY Morton

PHONE# (806) 352-2706 OPERATORS LICENSE NO. _____

Date Well Completed 3-25-96

Character of Well Gas

Plugging Commenced 3-22-96

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 3-25-96

The plugging proposal was approved on 3-20-96 (date)

by Steve Middleton (KCC District Agent's Name).

Is ACO-1 filed? _____ If not, is well log attached? Yes

Producing Formation Topeka Depth to Top 2161 Bottom 2828 T.D. 3008

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

RECEIVED
KANSAS CORPORATION COMMISSION

Formation	Content	From	To	Size	Put In	Pulled out
				<u>5 1/2</u>	<u>3503</u>	<u>900</u>
				<u>4 3/4</u>	<u>520</u>	<u>—</u>

APR 08 1996
CONSERVATION DIVISION
WICHITA, KS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid placed and the method or methods used in introducing it into the hole. If cement or other pl were used, state the character of same and depth placed, from _____ feet to _____ feet each s
Mixed 4 5/8 huls @ 25 5/8 cement to plug perfs from 2307 to 2607. Recovered 900 ft, 5 1/2. Pulled 5 1/2 to 530. Circ. hole w/ mud to mixed 7 5/8 cement plug @ bottom of 9 3/4 from 530 to 430. Pulled to 40. Mixed 10 5/8 plug from 40 to 0. Cut off @ capped 9 3/4 3 ft. below ground level.
(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Sargent And Horton Plugging, Inc. License No. 31151

Address Rt. 1, Box 49 BA Tyrone, OK 73951-9731


NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Executive Properties, Inc.

STATE OF Texas COUNTY OF Randall, ss.

Executive Properties, Inc. (Employee of Operator) or (Operator) above-described well, being first duly sworn on oath, says: That I have knowledge of the fac statements, and matters herein contained and the log of the above-described well, as filed the same are true and correct, so help me God.

(Signature) CW Crouch Jr

(Address) 1715 West 58th, Amarillo TX 79110

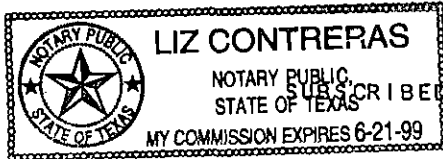

AND SWORN TO before me this 2nd day of April, 1996

Liz Contreras
Notary Public

My Commission Expires: 06-21-99

Attachment:

According to 43 CFR 3160 - Onshore Order No. 2

Telephone:

Office: (918) 621-4141, Tulsa

Wells: (918) 355-1700, Broken Arrow (after 5 p.m.)

Conditions of Approval to Plug and Abandon

The following are additions and/or modifications to the proposed operations:

1. At least two work days prior to operations, notify Mr. Roger Middleton, telephone (405) 790-1025, so that a representative of this office may be present to witness the operations.
2. Cementing requirements follow: note that the following items must have an excess of 10% slurry for each 1000 feet of depth. Cement slurry shall be Class "A" or "H" & yield of 1.18 cf/sx and minimum plug size of 25 sacks. A cement plug (100' in length) is required to be set every 3000' of open hole.
3. Long String:

- a. Open hole Completion - A cement plug shall be placed to extend from total depth or plug back total depth to 100' into long string. Cement plug shall be tagged or pressure tested.

Open hole interval _____ Casing Shoe 5 1/2" - 2503' / ? 5x5.

- b. Perforated Completion - A cement plug shall be placed opposite all open perforation and extend to a minimum of 50' below to 50' above the perforated interval. Cement plug shall be tagged or pressure tested.

Perforated interval 2807-2818, 2778-2786, 2767-2772,

In lieu of the cement plug, a bridge plug is acceptable, provided:

- a. The bridge plug is set within 50' to 100' above the open perforations; and tested.
- b. The perforations are isolated from any open hole below;
- c. The bridge plug is capped with 50' of cement. If a bailer is used to cap this plug 35' of cement shall be sufficient.

4. Casing removed from hole: If any casing is cut and recovered, a cement plug shall be placed to extend at least 50' above and below stub.

Bar well
Government # 1, K5W0815349
C NE NE 18-345-43W
Yilloto County, OK

RECEIVED
KANSAS DEPARTMENT OF REVENUE

AT 10 2 56

COMMISSIONER OF REVENUE
WICHITA, KS

5. Surface or intermediate casing: A cement plug shall be placed to extend 100' above and below the casing shoe. The cement plug shall be tagged;

Surface casing Size _____ Set @ _____
Intermediate casing Size _____ Set @ _____

Treatable water shall be protected from 100' below the base of the treatable water table; Base of Treatable Water _____ *

* Operator is responsible for contacting the State Water Resource Board, pertaining to the protection of fresh water strata.

6. Mud: Each of the intervals between plugs shall be filled with 9 #/gal drilling mud or mud of sufficient mud weight to stabilize the well bore.

7. Surface Plug: A cement plug of at least 50' shall be placed across all annuluses.

8. Surface Cap: The casing will be cut off 3' below ground level and the well bore capped with a 1/4 inch thick metal plate. The plate shall contain the following inscription information: legal description, well number, lease number, API no., and date. The plate shall be welded in place. A weep hole will be left in the plate.

Note: The date inscribed on plate shall be the date well was plugged and abandoned and shall be reported on the 3160-5 sundry form.

9. Surface Restoration: If a working pit is required a steel pit will be used, you are required to empty the pit by tank truck and waste to be disposed in an authorized facility and any cellar shall be filled with soil to ground level.

10. Surface reclamation: The surface of the lands disturbed in connection with the conduct of operations shall be reclaimed in accordance with the previously approved reclamation plan. If the well and other facilities are not covered by a previously-approved reclamation plan, a surface reclamation plan shall be submitted with a Sundry Notice. Surface reclamation should be coordinated with the Bureau of Land Management Oklahoma Resource Area, 221 North Service Road, Moore, Oklahoma 73160, telephone number (405) 794-9624...

11. Regulations require that an original and four copies of the Sundry Notice (Form 3160-5, enclosed) be submitted within thirty (30) days after completion of operations. Summarize operations performed, including all pertinent dates and results of operations.

(1) cement Plug #/2828 - 2600; woc tag

(2) Prof 5 1/2 @ 5, @ 620; establish circ @ surf, circ. cement - if 0.37
grouted plug #/620' - 420' woc, tag
(Note - Treatable water table steps)

3) surface Plug 53' - 3'

KCC - May ask for more plug setting BLM requirement stated above.

RECEIVED
KANSAS CORPORATION COMMISSION
APR 08 1996
CONSERVATION DIVISION
WICHITA, KS

GOVERNMENT #1
SECTION 18-34-43W
MORTON COUNTY KANSAS
ATTACHMENT TO FORM CP-1

Perforations and Bridgeplug Sets:

3435-3455, PB 3220, 3245-3257
3206-3226, 3245-3257, PB 3180, 3112-3138
3112-3124, 3130-3138, PB 3085
3064-3078, PB 3030
2998-3008, 2986-2992, 2972-2978, PB 2942
2930-2940, 2919-2926, PB 2900
2863-2878, PB 2850

PROPOSED METHOD OF PLUGGING:

Pump 25 saks of cement for Plug #1 with top of plug at 27-3008
Pump 35 saks of cement at 1200 ft.
Pump 50 saks of cement at 520-420
Pump 10 saks cement 33-3 ft.
Casing and cut off 9 5/8 casing 4 ft. below GL
Well on ID marker on plate.

RECEIVED
KANSAS CORPORATION COMMISSION

APR 08 1996

CONSERVATION DIVISION
WICHITA, KS