


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

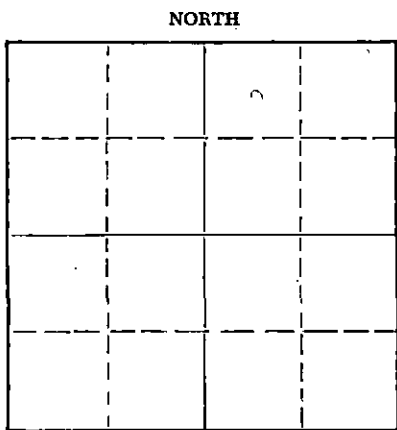

Locate well correctly on above  
Section Plat

Meade County, Sec. 25 Twp. 34 Rge. 30 (E) W (W)  
Location as "NE/CNW&SW" or footage from lines C N of NW/4 NE/4  
Lease Owner Columbian Fuel Corporation  
Lease Name H. G. Adams Well No. F-2  
Office Address P. O. Drawer 31, Liberal, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed August 10 19 60  
Application for plugging approved August 11 19 60  
Plugging commenced August 25 19 60  
Plugging completed September 1 19 60  
Reason for abandonment of well or producing formation \_\_\_\_\_  
Well Not Capable of Commercial Production  
If a producing well is abandoned, date of last production None 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp, Jr. Stafford, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 6050 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13-3/8"	640'	None
				9-5/8"	2671'	None
				5-1/2"	5969'	3374'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 6050 feet to Surface feet for each plug set.

Well plugged back from 6050' to 5927' and perforated from 5902' to 5905'.  
Hole filled with sand to 5800'. Five (5) sacks of cement put at 5800' with  
dump bailer. 5-1/2" casing shut off at 3374'. All pipe pulled and hole  
filled with mud to 640'. Ten (10) foot rock bridge installed between 640'  
and 630' and 2 sacks cement poured in hole. Hole filled with mud to 40'.  
Ten (10) foot rock bridge installed between 40' and 30'. Hole capped with  
ten sacks of cement to bottom of hole.

RECEIVED  
STATE CORPORATION COMMISSION  
SEP 20 1960  
CONSERVATION DIVISION

Name of Plugging Contractor \_\_\_\_\_  
Address \_\_\_\_\_

STATE OF Seward COUNTY OF Kansas, ss.  
E. R. Gobble (employee of owner) or (owner or operator) of the above-described  
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the  
above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. R. Gobble  
P. O. Drawer 31, Liberal, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of September, 1960

My commission expires November 5, 1962 Calvin Lindsey Notary Public.



H. G. Adams "F" No. 2 Well  
Center Northwest Northeast Section 25-34S-30W,  
Meade County, Kansas

Commenced: October 15, 1951  
Completed: November 30, 1951

Surface clay	0	40	Lime	5083	5108
Surface sand & shells	40	635	Lime and shale	5108	5193
Red bed	635	660	Lime	5193	5227
Sand & shells	660	690	Cherty lime	5227	5241
Shells, sand and shale	690	897	Lime and shale	5241	5292
Sand and shells	897	1000	Lime	5292	5351
Shells, sand and shale	1000	1440	Lime and shale	5351	6050
Shale, lime shells and salt	1440	1496			
Lime, shale and anhydrite	1496	1655	TOTAL DEPTH	6050	
Shale, lime, salt, anhydrite	1655	1691			
Shale, lime and anhydrite	1691	1738			
Shale, lime shells, salt	1738	1840			
Shale, lime shells, anhydrite	1840	1879			
Shale, lime, anhydrite	1879	2055			
Shale, lime shells, anhydrite	2055	2104			
Shale, lime, anhydrite	2104	2185			
Anhydrite and salt	2185	2258			
Lime and anhydrite	2258	2354			
Anhydrite	2354	2361			
Anhydrite, slicky blue shale	2361	2389			
Lime, shale, anhydrite	2389	2440			
Lime and anhydrite	2440	2499			
Anhydrite	2499	2545			
Anhydrite, lime, shale	2545	2581			
Anhydrite	2581	2649			
Cherty lime	2649	2662			
Anhydrite, chert	2662	2679			
Cherty lime	2679	2715			
Lime and shale	2715	2926			
Lime	2926	3040			
Lime and shale	3040	3075			
Lime	3075	3311			
Shale and lime	3311	3392			
Lime	3392	3548			
Cherty lime	3548	3589			
Lime	3589	3791			
Shale	3791	4070			
Shale and lime	4070	4129			
Shale	4129	4426			
Shale and lime	4426	4506			
Lime	4506	4519			
Shale and cherty lime	4519	4562			
Lime and shale	4562	4775			
Lime	4775	4796			
Shale and lime	4796	4995			
Lime	4995	5028			
Lime and shale	5028	5083			

CASING RECORD

- Set 13-3/8" Casing @ 651' and cemented with 500 sacks of cement.
- Set 9-5/8" Casing @ 2667' and cemented with 1000 sacks of cement.
- Set 5-1/2" Casing @ 5965' and cemented with 300 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 11 1960

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF OKLAHOMA )  
  <sup>ss</sup>  
COUNTY OF TULSA    )

I hereby affirm that the above and foregoing is a true and correct copy of the log of the H. G. Adams "F" No. 2 Well located in the Center of the Northwest Quarter of the Northeast Quarter of Section 25, Township 34 South, Range 30 West, Meade County, Kansas.

HELMERICH & PAYNE, INC.

By [Signature]  
Vice-President

Subscribed and sworn to before me, a Notary Public, this 18th day of December, 1951.

[Signature]  
Notary Public

My Commission expires March 13, 1954.