

15-129-00142-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

NORTH

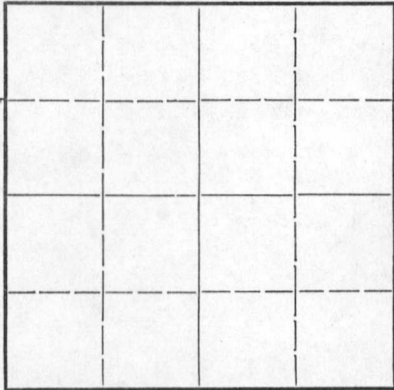

Locate well correctly on above
Section Plat

Morton County. Sec. 12 Twp. 34 Rge. (E) 43 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW $\frac{1}{4}$, NW $\frac{1}{4}$, NW $\frac{1}{4}$
Lease Owner: Emergency Export Corporation
Lease Name: Interstate Cattle Loan Co. Well No. I
Office Address: Wichita Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Rotary Dry Hole
Date well completed: October 30 1947
Application for plugging filed: October 30 1947
Application for plugging approved: October 30 1947
Plugging commenced: October 30 1947
Plugging completed: October 30 1947
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: X 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well: H.W. Kerr
Producing formation: X Depth to top: X Bottom: X Total Depth of Well: 5843 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface sand and shale	Fresh water	120	130	9 5/8"	240I (Circulated w/ Cement)	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from T.D. to 2360' Set Lane Wells plug at 2360.
Filled hole with heavy mud to 2000'. Bridged hole and 5 sacks cement. Filled
hole with heavy mud from top cement to 250' of top hole and dumped 15 sacks
Cement at 250'. Filled hole with heavy mud from top cement to 15' of top
surface and filled balance of surface pipe and bottom sellar with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to: Harbar Drilling Co. 11-12-47
Address: 1019 Central Bldg. Wichita Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
I J.E. Trimble (employee of owner) or (owner/operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) J.E. Trimble

SUBSCRIBED AND SWORN TO before me this 6th day of November, 1947

Ray Gillig Notary Public.

My commission expires 9-4-50
PLUGGING
FILE SEC 12 T 34 R 436
BOOK PAGE 145 LINE 7


INTERSTATE CATTLE & LOAN CO. #1

W¹/₄ of Section 12, Township 34S, Range 43W, Morton
County, Kansas.

Rigging up Rotary Tools 9-9-47
Tearing out Rotary Tools 11-1-47

Run 77 Jts. 2404' surface casing. Set
@ 2401' and cemented with 1050 sacks
of cement.

FORMATION	FROM	TO
Surface clay	0	30
Sand	30	70
Red bed	70	150
Red bed and shells	150	195
Sand Boulders	195	220
Red Shale and Rock	220	285
Red Rock and shells	285	400
Red bed	400	425
Red bed and shells	425	460
Red bed and sand	460	500
Red bed	500	600
Red Shale and shells	600	650
Anhydrite	650	658
Anhydrite - Shale red	658	780
Anhydrite	780	805
Red shale and shells	805	905
Anhydrite	905	920
Anhydrite Red Shale	920	1020
Red Shale	1020	1080
Red shale and shells	1080	1165
Shale Anhydrite	1165	1210
Red Shale and shells	1210	1245
Sandy shale and shells	1245	1265
Shale & Anhydrite	1265	1345
Red and Blue Shale	1345	1420
Shale and shells	1420	1545
Shale	1545	1625
Shale and shells	1625	2120
Sandy lime	2120	2170
Shale and lime	2170	2385
Lime	2385	2401
Lime and shale	2401	2410
Lime (hard, white)	2410	2450
Lime	2450	2490
Lime and shale	2490	2555
Sandy Lime	2555	2635
Lime	2635	2800
Lime and shale	2800	2860
Lime (broken)	2860	2935
Lime and shale	2935	3005
Lime (Medium)	3005	3009
Lime (Soft)	3009	3019
Shale and lime	3019	3055
Lime (broken)	3055	3205
Lime and shale	3205	3255
Lime (soft)	3255	3263
Lime and shale	3263	3312
Lime (Soft)	3312	3320
Lime	3320	3380
Lime and shale	3380	3413
Soft lime	3413	3421
Lime and shale	3421	3429
Soft Chalky Lime	3429	3437
Lime	3437	3460

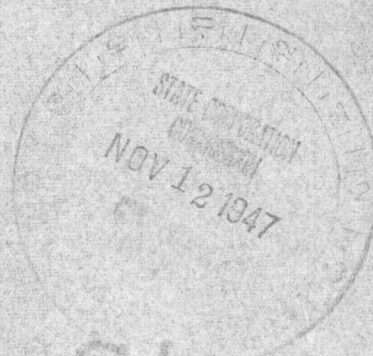

PLUGGING
FILE SEC 17 T 34 R 430
BOOK PAGE 145 LINE 17

FORMATION	FROM	TO
Sand and lime	3460	3486
Sand and Lime (very light odor)	3486	3499
Lime and sahel	3499	3585
Lime and sand	3585	3685
Shale and lime	3685	3835
Lime and sand	3835	3865
Shale and lime	3865	3915
Lime and sand	3915	3965
Lime	3965	4020
Lime Cherty	4020	4125
Shale and Lime	4125	4201
Soft Lime	4201	4235
Shale and lime	4235	4360
Shale	4360	4440
Lime (Broken with Shale)	4440	4451
Shale and lime	4451	4510
Shale and lime	4510	4590
Sandy Lime and Shale	4590	4622
Soft Sandy Lime	4622	4625
Lime and sand	4625	4629
Sandy Lime	4629	4630
Sand and Lime	4630	4644
Sand and shale	4644	4690
Lime and sand	4690	4700
Lime	4700	4750
Lime (Medium)	4750	4762
Lime (Soft)	4762	4772
Lime	4772	4890
Chert Lime	4890	4900
Lime	4900	5062
Lime Chert	5062	5105
Lime	5105	5165
Lime and Chert	5165	5185
Lime	5185	5295
Dolomite Lime	5295	5355
Lime	5355	5395
Lime shale	5395	5430
Hard Sand shale	5430	5450
Lime	5450	5492
Dolomite (Soft)	5492	5500
Dolomite (Medium)	5500	5502
Chert	5502	5506
Lime	5506	5513
Lime - Cherty	5513	5544
Lime	5544	5586
Sand and shale	5586	5609
Lime	5609	5655
Chert and Shale	5655	5682
Cherty Dolomite	5682	5690
Lime	5690	5725
Soft Lime	5725	5745
Lime	5745	5800
Dolomite	5800	5843 Total Depth

I, Don S. Packer, hereby certify that the above log is true and correct, to the best of my knowledge and belief.

Don S. Packer

Subscribed and sworn to before me this 7th day of November, 1947.

My commission expires: *Dec 23, 1950*

Mary R. Brown
Notary Public

PLUGGING
FILE SEC T R
BOOK PAGE LINE