


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stevens County, Sec. 1 Twp. 34 Rge. 36 (X) (W)  
Location as "NE/CNWxSWx" or footage from lines C-SE-NW  
Lease Owner Northern Natural Gas Producing Company  
Lease Name Mills "A" Well No. 2  
Office Address 2223 Dodge Street, Omaha, Nebraska  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed December 2, 19 59  
Application for plugging filed December 2, 19 59  
Application for plugging approved December 2, 19 59  
Plugging commenced 10:00 P.M. December 2, 19 59  
Plugging completed 8:00 A.M. December 3, 19 59  
Reason for abandonment of well or producing formation No productive zone for commercial oil or gas found.  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

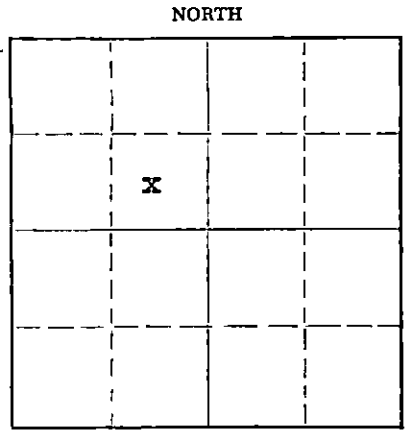

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 6460 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FRDM	TD	SIZE	PUT IN	PULLED OUT
				8 5/8	717	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.  
Filled hole with heavy mud 6460 to 6200  
Spotted 95 sx. cement 6200 to 5900  
Heavy mud 5900 to 3000  
Spotted 1 30 sx. cement 3000 to 2600  
Heavy Mud 2600 to 715  
Spotted 15 sx. cement 715 to 665  
Heavy Mud 665 to 35  
Spotted 15 sx. cement from 35 to bottom of cellar and cut 8 5/8 off and welded cap on at bottom of cellar.  
Halliburton plugs at 715 feet and 35 feet.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 9 1959

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor D & M Drilling Company, Inc.  
Address Box 247, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Stevens, ss.  
Richard G. Schmidt (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) \_\_\_\_\_  
Box 607, Hugoton, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 4 th day of December, 19 59

My commission expires 6-9-62 \_\_\_\_\_  
Gayle F. Cox Notary Public.



MILLS 2-A  
C SE/4 NW/4 Sec. 1-34S-36W

Rigged up Rotary Tools 10-29-59

Ran 18 jts. 8 5/8"x24# Casing  
(717.60) Set @ 728.85 Cement W/  
450 sx. Pozmix 2% C.C.

Tore Down Rotary Tools 12-3-59

FORMATION	FROM	TO
Sand & Shale	00	182
Sand, Shale & Anhy Streaks	182	738
Sand & Shale	738	800
Redbed	800	1062
Sand	1062	1581
Redbed & Sand	1581	1690
Anhy - Lime	1690	1740
Lime & Shale	1740	1995
Shale & Anhy	1995	2072
Shale & Lime	2072	2638
Shale & Chalky Lime	2638	2715
Shale & Lime	2715	2963
Lime W/Chert	2963	3134
Lime & Shale	3134	3440
Lime	3440	3520
Lime & Shale	3520	3720
Shale & Chalky Lime	3720	3858
Lime Shale & Chalk	3858	3965
Lime & Shale	3965	4037
Lime, Shale	4037	4140
Shale, Lime & Chalk	4140	4218
Shale & Lime	4218	4676
Lime W/Chert	4676	4705
Shale & Lime	4705	5197
Lime	5197	5398
Shale & Lime	5398	5674
Shale	5674	6293
Shale & Lime	6293	6460 T. D.

RECEIVED  
U.S. GEOLOGICAL SURVEY

FEB 13 1963

CONSERVATION DIVISION  
Wichita, Kansas