

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD 15-189-10035-0000

Stevens County, Sec. 12 Twp. 31 Rge. 39 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW NE 1320' FNL & 1395' FEL

Lease Owner Pan American Petroleum Corporation

Lease Name Security Elevator Gas Unit "F" Well No. ~~XX~~ #1

Office Address Ulysses, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 5-8 19 62

Application for plugging filed Confirming report will follow 19

Application for plugging approved 7-5 19 62


Plugging commenced 9-27-62 19

Plugging completed 9-28-62 19

Reason for abandonment of well or producing formation ~~None~~ No commercial quantities of oil or gas present.

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

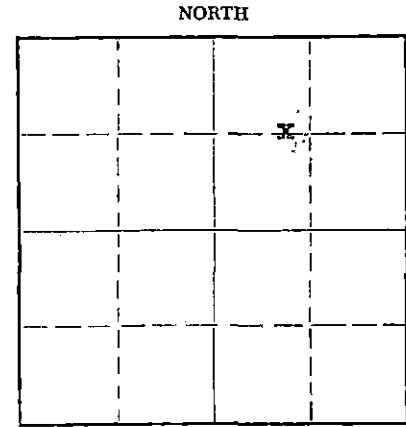

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation None Depth to top Bottom Total Depth of Well 6000 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	Tdbs	SIZE	PUT IN	PULLED OUT
Council Grove			2772	8-5/8"	1834'	None
Pennsylvanian			3193	4-1/2"	5867'	2174'
Des Moines			4697			
Morrow			5372			
Chester			5844			
St. Genevieve			5934			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 2966', sanded to 2450' and dumped 4 sacks of cement @ 2450' with dump bailer. Pulled 4 1/2" casing, mudded hole to 700' set rock bridge to 690' and ran 35 sacks of cement. Mudded to 55', set rock bridge to 45' and ran 15 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
OCT-17 1962
CONSERVATION DIVISION

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas.
(Address)

SUBSCRIBED AND SWORN to before me this 2nd day of October, 1962

My commission expires May 20, 1964

Milton J. Volin Notary Public.



PAN AMERICAN PETROLEUM CORPORATION

15-189-10033-0000

WELL RECORD

SUPPLEMENTAL (ENTER "X" WHEN APPLICABLE)

Grid for well location with handwritten numbers: 1310, 1320, 1330, 1340, 1350, 1360, 1370, 1380, 1390, 1400, 1410, 1420, 1430, 1440, 1450, 1460, 1470, 1480, 1490, 1500.

LOCATE WELL CORRECTLY

LEASE Security Elevator Gas Unit #1 WELL NO. 1
LOCATION OF WELL 1320 FT. SOUTH OF THE SOUTH LINE AND 1395 FT. WEST OF THE WEST LINE OF THE 1/4 SECTION 12 TOWNSHIP 31 SOUTH RANGE 35 WEST
Stevens COUNTY Kansas STATE
ELEVATION: DP 3183 178 3185 GL 3176
COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY HOLE
DRILLING COMMENCED 3-3 1962 COMPLETED 5-3 1962

OPERATING COMPANY Pan American Petroleum Corporation ADDRESS Box 507 - Ulysses, Kansas

OIL OR GAS SANDS OR ZONES

Table with columns: NAME, FROM, TO, NAME, FROM, TO. Rows include Council Grove, Pennsylvania, Des Moines, Morrow, Chester, St. Genevieve.

WATER SANDS

Table with columns: NAME, FROM, TO, WATER LEVEL, NAME, FROM, TO, WATER LEVEL. Rows 1 and 2.

CASING RECORD (OVERALL MEASUREMENT)

LINER-SCREEN RECORD

Table with columns: CSG. SIZE, WEIGHT, THREADS, MAKE - GRADE, QUANTITY FEET, SIZE, QUANTITY FEET, SET AT (TOP, BOTTOM), MAKE AND TYPE. Rows for 8 5/8" and 4 1/2" casing.

PACKER RECORD

Table with columns: SIZE, LENGTH, SET AT, MAKE AND TYPE.

CEMENTING RECORD

MUDDING RECORD (CABLE TOOLS)

Table with columns: SIZE, WHERE SET FEET, SACKS, CEMENT BRAND, TYPE, METHOD, FINAL PRESS, METHOD, RESULTS. Includes cementing details for 8 5/8" and 4 1/2" casing.

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED

ROTARY TOOLS WERE USED FROM 0 FEET TO 6,000 FEET AND FROM FEET TO FEET

CABLE TOOLS WERE USED FROM 0 FEET TO FEET AND FROM FEET TO FEET

24-HOUR PRODUCTION OR POTENTIAL TEST

WATER BBLs.

IF GAS WELL, CUBIC FEET PER 24 HOURS Day hole SHUT-IN PRESSURE LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 26 DAY OF May 1962 NAME AND TITLE Area Foreman

MY COMMISSION EXPIRES 10-3-64

Notary Publics

no appl'n to plug

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Sand-Shale	0	707			
Red bed	707	1057			
Red bed-anhyd.	1057	1280			
Red bed-gyp	1280	1840			
Sand-shale	1840	2225			
Anhyd-lime-shale	2225	2253			
Lime-Shale	2253	2675			
Sand-shale	2675	2843			
Lime-shale	2843	3809			
Lime-chalk	3809	3900			
Lime-shale	3900	4035			
Lime-shale-sand	4035	4142			
Lime-shale	4142	4272			
Lime-shale-chalk	4272	4335			
Lime-shale	4335	5954			
* Lime	5954	6000			
Total Depth	6000				
Plug back depth	2956				