

15-607-10062-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

NORTH

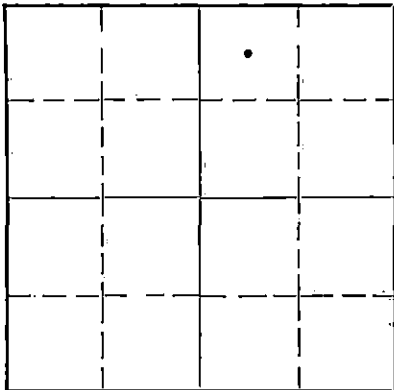

Locate well correctly on above  
Section Flat

Barber County. Sec. 25 Twp. 31S Rge. 12 (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines C NW 1/4 NE 1/4  
Lease Owner OLSON OIL COMPANY  
Lease Name L. M. Coffman Well No. 1  
Office Address Drawer 588, Tulsa, Oklahoma  
Character of Well (Completed as Oil, Gas or Dry Hole) DRY  
Date, well completed March 24 1939  
Application for plugging filed March 23 1939  
Application for plugging approved March 25 1939  
Plugging Commenced March 25 1939  
Plugging Completed March 25 1939  
Reason for abandonment of well or producing formation DRY  
If a producing well is abandoned, date of last production 1939  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Guy Wieshing  
Producing formation Depth to top Bottom Total Depth of Well 4850 Feet.  
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing & K.C. Lime		3685		12 1/2"	250	None
Mississippi Lime		4241		5 1/2" O.D.	4617	2250
Viola Lime		4512				
Simpson		4597				
Arbuckle Lime		4800				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud from 4850 to 4617. Set 5 1/2" O.D. casing and cemented with 150 sacks of cement. Perforated casing 4511 to 4527 and 4241 to 4265. Shot off casing and pulled 2250 ft. Filled hole with heavy mud to 250 ft. Set good plug and dumped in 15 sacks of cement and filled with mud to 15 ft. Bridged hole and dumped in 10 sacks of cement and welded cap on surface pipe.

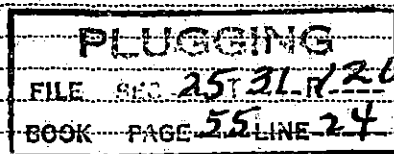

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to OLSON OIL COMPANY  
Address Box 408, Burton, Kansas

STATE OF KANSAS, COUNTY OF Reno, ss.  
C. L. Barrett (employee of owner) or (owner) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


NOT NOTARIZED

(Signature) C. L. Barrett  
Box 408 Burton Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of April, 1939  
G. J. Boyauk  
Notary Public.  
My commission expires 4/30/42

15-007-1002-0000

OLSON OIL COMPANY  
 L. M. Coffman # 1  
 C NW NE, Sec. 25-31S-12W  
 Barber County, Kansas




COMMENCED 2 - 5 - 39  
 COMPLETED 3 - 24 - 39  
 ELEVATION 1529 ft.

0		2799	Lime & shale
9	Cellar	2811	Shale
17	Surface clay and sand	2860	Lime
40	Sand rock	2880	Shale
165	Sand & shale	3020	Lime
225	Red shale & shells	3037	Sand
245	Water sand & shells	3079	Broken lime
263	Red shale & shells	3197	Lime
295	Shale	3259	Shale & lime shells
426	Red shale & red rock	3366	Shale & lime
495	Red bed and shale	3427	Soft sandy shale & lime
549	Blue shale & small shells	3429	Lime & shale
647	Shale	3449	Shale
765	Shale	3525	Shale & lime shells
890	Red shale	3600	Soft shale, lime shells
953	Shale	3623	Shale & lime
1003	Shale & salt	3680	Shale, sandy (S.L.M. Correct)
1034	Blue shale	3698	Shale & sand Top of K.C. 3685
1036	Hard lime shells	3706	Lime
1106	Shale, salt & shells	3795	Lime, soft and firm
1255	" " "	3883	Lime
1403	Anhydrite, shale & salt	3898	Soft lime
1448	" , shells, shale & salt	3966	Lime
1512	Shale & shells	4000	Lime & shale
1545	Anhydrite	4007	Lime
1640	" & shale	4052	Lime & shale
1715	"	4084	Lime, chert and shale
1750	" and lime (hard)	4114	Lime & chert, sharp
1830	" and shale	4146	Lime, firm, grey
1887	Blue shale	4180	Lime
1907	Shale	4195	Lime & shale
1928	Lime	4211	Shale
1957	Shale	4241	Lime & shale
2246	Lime & shale	4244	Sand, Top of Chat 4241
2235	S. L. M. Correction	4250	Cored, chat & chert
2260	Lime & shale	4260	Chat
2331	Shale	4268	Chat & chert
2415	Shale & shells	4277	Chat
2452	Lime & shale	4290	Chert & shale
2459	Sandy shale	4301	Chert, chat and shale
2582	Shale & lime shells		Set Halliburton wall packer
2639	Shale & lime		at 4217, small show of gas.
2630	Correction	4304	Chert
2695	Shale & shells	4309	Chert & shale
2750	Shale & lime shells	4313	Shale, chert & shells

4241  
 1529  
 2712

PLUGGING  
 FILE SEC 25T31R12W  
 BOOK PAGE 55 LINE 24

OLSON OIL COMPANY  
L. M. Coffman # 1  
Barber County, Kansas



COMMENCED 2 - 5 - 39  
Completed 3 - 24 - 39  
ELEVATION 1529 ft.

- 4254 Shale
- 4358 Broken chert
- 4361 Shale
- 4369 Chert
- 4377 Chert, hard & sharp
- 4395 Shale & lime
- 4402 Chert, lime and shale
- 4410 Sticky shale
- 4430 Lime & shale
- 4463 Shale
- 4514 Shale
- 4511 S. L. M. Correction
- 4512 Shale Top of Viola 4512
- 4525 Lime, Cored 11 to 25,  
full recovery
- 4526 Lime
- 4532 Lime & chert, cored
- 4543 Lime, firm
- 4579 Lime & chert
- 4597 Lime with small shale breaks
- 4598 Lime & shale
- 4624 Sandy shale
- 4632 Cored, sandy green shale
- 4633 Cored, Shale
- 4647 Cored, sand & shale
- 4668 Lime & shale
- 4714 Dolomite, sand & shale
- 4757 " , lime & shale
- 4794 "
- 4850 Dolomite & lime, Total Depth

CASING RECORD

13" O.D. 50# 8 thd. S.H. L.W. 258 ft.  
5 3/16" 17&20# 10 thd. S.H. S.S. 4611 ft.

SAND RECORD

Lansing & K.C. Lime	3685
Mississippi Lime	4241
Viola Lime	4512
Simpson	4597
Arbuckle	4800

On 3 - 2 - 39 run Halliburton wall packer to test Chat. Set packer at 4215. T. D. 4301. Set for 25 min. recovered 90 ft. mud and small show of gas.

Set 5 3/16" pipe at 4617. Drilled cement to 4585. Perforated Viola with Lane-Wells from 4506-29 with 48 shots, no show. Perforated Chat 4241-52 with 24 shots, no show.

Hole plugged and abandoned March 25, 1939

PLUGGING  
FILE SEC-25-31R-124  
BOOK PAGE 55 LINE 24

Subscribed and sworn to before me  
this 28th day of March 1939

A. J. Bryant  
Notary Public  
My commission expires April 20, 1942

I hereby certify that the above  
is a true and correct copy of the log  
of the L. M. Coffman # 1, C NW NE/4,  
Sec. 25 - 31S - 4W, Barber County, Kansas

C. L. Barrett