

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Seward County, Sec. 19 Twp. 32S Rge. 33 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
NE NE SW Sec. 19-32-33W

Lease Owner Cabot Corporation  
Lease Name W. V. Griffith Well No. 1  
Office Address P. O. Box 1101, Pampa, Texas 79065


Character of Well (Completed as Oil, Gas or Dry Hole)  
Gas

Date Well completed October 28, 1950  
Application for plugging filed March 16, 1978  
Application for plugging approved March 17, 1978  
Plugging commenced April 27, 1978  
Plugging completed April 28, 1978  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production  
April 16, 1978

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well Mr. Clarence Thomas  
Producing formation Hugoton Gas Depth to top 2586 Bottom 2606 Total Depth of Well 2640  
Show depth and thickness of all water, oil and gas formations.

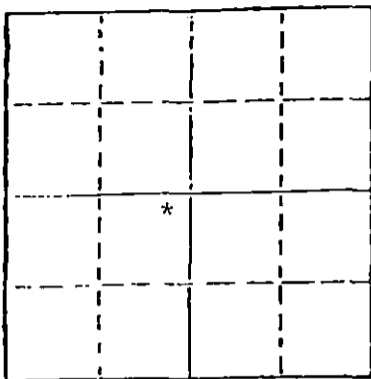

Locate well correctly on above  
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Herrington		2529	2544	10 3/4	458	-0-
Upper Krider		2557	2580	7	2475	-0-
Lower Krider	Gas	2583	2620			
Winfield		2633	2640			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set.

Plug #1 - 2600' to 2500', pumped 2 sks. hulls and 50 sks. cement, hole loaded w/ 9.2# mud.  
Plug #2 - 450' to 350', pumped 2 sks hulls and 50 sks. cement.  
Plug #3 - 40' to 0', pumped 10 sks cement, cut off 10 3/4" csg. and capped.

RECEIVED  
STATE CORPORATION COMMISSION

MAY 15 1978

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargents Casing Pulling Service, Liberal, Kansas.

STATE OF TEXAS COUNTY OF GRAY, ss.  
RAY WOOLDRIDGE (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) Ray Wooldridge  
Cabot Corp., P.O. Box 1101, Pampa, Tx. 79065  
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of May, 1978.

Everghu Bowerman  
Notary Public.

My commission expires 01-11-80

DRILLERS LOG OF  
CABOT'S NO. 1 GRIFFITH  
SEWARD COUNTY, KANSAS

Company:	Cabot Carbon Company	Commenced:	September 30, 1950
Farm:	W. V. Griffith No. 1	Completed:	October 28, 1950
Section:	19-32-33	Contractor:	Hills & Hills
Location:	330 S & W of Center <i>o/c</i>	Elevation:	2791
Casing:	10 3/4" @ 458'-250 sks.	Total Acid:	6,000 - 15%
	7" @ 2475'-750 sks.	Rock Pressure:	421.5
	5 1/2" lnr. @ 254'	T/Herington	2529-2544
I.P.N.	.250M	Up. Krider	2557-2580
I.P.A.	2,048M	L. Krider	2583-2620
S/G	2560-70	Winfield	2633-2640
		Total Depth:	2640

*PBTD 2606' 4-29-53*

0 to 50	clay, sand
50 to 200	sand, gravel
200 to 350	clay
350 to 467	clay, red bed
467 to 585	red bed
585 to 630	shale, gyp
630 to 960	red bed, gyp
960 to 1485	gyp, red shale
1485 to 1950	gyp, red bed
1950 to 2130	red bed, gyp, anhydrite, shells
2130 to 2200	anhydrite
2200 to 2325	shale, anhydrite
2325 to 2420	lime, broken anhydrite
2420 to 2460	anhydrite
2460 to 2485	dolomite
2485 to 2505	broken lime, anhydrite
2505 to 2507	shale
2507 to 2517	broken lime, anhydrite
2517 to 2527	shale, anhydrite
2527 to 2553	lime
2553 to 2560	dolomite
2560 to 2570	dolomite, broken lime
2570 to 2581	gyp, anhydrite
2581 to 2600	blue lime
2600 to 2625	dolomite
2625 to 2638	lime
2638 to 2640	water, sand
2640	Total Depth

RECEIVED  
STATE OF KANSAS  
MAR 17 1978  
COMPTROLLER GENERAL  
Topeka, Kansas