

15-129-10125-0000

Form CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

### WELL PLUGGING RECORD

Morton County, Sec. 11 Twp. 32 Rge. 40 (E)W (W)

Location as "NE/CNW/SW" or footage from lines C SW NE  
 Lease Owner Pan American Petroleum Corporation  
 Lease Name Miles ~~XXX~~ Gas Unit "D" Well No: 1  
 Office Address Ulysses, Kansas  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed 12-2 19 60  
 Application for plugging filed 7-2 19 62  
 Application for plugging approved 7-2 19 62  
 Plugging commenced 6-29-62 19  
 Plugging completed 6-30-62 19  
 Reason for abandonment of well or producing formation Depleted. No commercial quantities of oil or gas present.  
 If a producing well is abandoned, date of last production None 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

NORTH

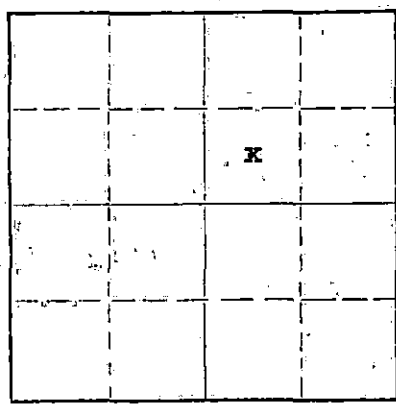

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Scott  
 Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 6200 Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TOPS	SIZE	PUT IN	PULLED OUT
Council Grove			2767	8-5/8"	721'	None
Morrow			5416	4-1/2"	5963'	2336'
Des Moines			4670			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to 5410', sanded to 5125' and dumped 3 sacks of cement @ 5125' with dump bailer. Pulled 4 1/2" casing to 700' and pumped in 30 sacks of cement. Pulled balance of 4 1/2" casing, checked fluid to 192', mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar. Welded on cap.

**RECEIVED**  
STATE CORPORATION COMMISSION

PLUGGING COMPLETE.

JUL 26 1962

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
 Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
 (Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of July, 1962

May 20, 1964  
Milton J. Volin Notary Public.

My commission expires

PAN AMERICAN PETROLEUM CORPORATION

WELL RECORD

SUPPLEMENTAL (ENTER "X" WHEN APPLICABLE)


LOCATE WELL CORRECTLY

LEASE Miles Gas Unit "D" WELL NO. 1

LOCATION OF WELL: 1980 FT.  NORTH  SOUTH OF THE  NORTH  SOUTH LINE AND 1980 FT.

EAST  WEST OF THE  EAST  WEST LINE OF THE 1/4 1/4 NE 1/4.

OF SECTION 11 TOWNSHIP 32  NORTH  SOUTH. RANGE 40  EAST  WEST.

Morton COUNTY

Kansas STATE

ELEVATION: Ground 3297 RDB 3306

COMPLETED AS:  OIL WELL  GAS WELL  WATER WELL  DRY HOLE

DRILLING COMMENCED 11-13 1960 COMPLETED 12-2 1960

OPERATING COMPANY Pan American Petroleum Corporation ADDRESS Box 591, Tulsa, Oklahoma

OIL OR GAS SANDS OR ZONES

NAME	FROM	TO	NAME	FROM	TO
1 <u>Council Grove</u>		<u>Top</u>	4		
		<u>2767</u>			
2 <u>Morrow</u>			5		
		<u>5416</u>			
3 <u>Des Moines</u>			6		
		<u>4670</u>			

WATER SANDS

NAME	FROM	TO	WATER LEVEL	NAME	FROM	TO	WATER LEVEL
1 <u>Unconsolidated</u>				3			
2				4			

CASING RECORD (OVERALL MEASUREMENT)

CSG. SIZE	WEIGHT	DESCRIPTION		QUANTITY FEET
		THREADS	MAKE - GRADE	
<u>8 5/8</u>	<u>24</u>	<u>8RT</u>	<u>J-55</u>	<u>716</u>
<u>4 1/2</u>	<u>9.5</u>	<u>8RT</u>	<u>J-55</u>	<u>5987</u>

LINER SCREEN RECORD

SIZE	QUANTITY FEET	SET AT		MAKE AND TYPE
		TOP	BOTTOM	

PACKER RECORD

SIZE	LENGTH	SET AT	MAKE AND TYPE

CEMENTING RECORD

SIZE	WHERE SET FEET	SACKS	CEMENT		METHOD	FINAL PRESS
			BRAND	TYPE		
<u>8 5/8</u>	<u>721</u>	<u>475</u>	<u>Pozmix</u>	<u>Bulk</u>	<u>Halliburton</u>	
<u>4-1/2</u>	<u>5963</u>	<u>210</u>	<u>Ashgrove</u>	<u>Bulk</u>	<u>Halliburton</u>	

MUDDING RECORD

METHOD	RESULTS
<u>JUL 26 1962</u>	<u>CONSERVATION DIVISION</u>
	<u>Wichita, Kansas</u>

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED.

ROTARY TOOLS WERE USED FROM 0 FEET TO 6200 FEET, AND FROM \_\_\_\_\_ FEET TO \_\_\_\_\_ FEET

CABLE TOOLS WERE USED FROM \_\_\_\_\_ FEET TO \_\_\_\_\_ FEET, AND FROM \_\_\_\_\_ FEET TO \_\_\_\_\_ FEET

24-HOUR PRODUCTION OR POTENTIAL TEST Dry Hole

WATER \_\_\_\_\_ BBLs.

IF GAS WELL, CUBIC FEET PER 24 HOURS \_\_\_\_\_ SHUT-IN PRESSURE \_\_\_\_\_ LBS. PER SQUARE IN.


I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT, ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 10th DAY OF February 19 61

[Signature] Area Superintendent

MY COMMISSION EXPIRES December 3, 1964

[Signature] NOTARY PUBLIC  
R. W. Banks



FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
Surface, Clay Sand	0	530			
Red Bed, Shale	530	722			
Red Bed, Anhydrite	722	1256			
Red Bed, Shale	1256	1473			
Shale, Anhydrite	1473	1665			
Anhydrite, Lime	1665	2042			
Shale	2042	2202			
Lime, Shale	2202	3584			
Lime, Chalk	3584	3650			
Lime, Shale	3650	3800			
Lime	3800	3951			
Lime, Shale	3951	4102			
Lime	4102	4223			
Lime, Shale	4223	4503			
Lime	4503	4550			
Lime, Shale	4550	4859			
Lime	4859	4967			
Lime, Shale	4967	5273			
Shale	5273	5331			
Lime, Shale	5331	6114			
Lime	6114	6200			
TOTAL DEPTH		6200			