

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202.

WELL PLUGGING RECORD

Pratt County, Sec. 23 Twp. 28S Rge. 12 (EX) (W)

Location as "NE/CNW/SW" or footage from lines W/2 NW NW
Lease Owner Raymond Oil Co., Inc.
Lease Name Chitwood #7 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 12/21/69 _____ 19____
Plugging completed 12/31/69 _____ 19____
Reason for abandonment of well or producing formation weak depleted

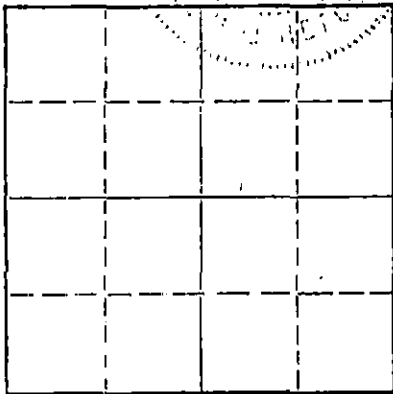

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Justice
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4487 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 9" | 319 | none |
| | | | | 5 1/2" | 4479 | 2828' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4422', ran sand to 4375', ran 5 sacks of cement.
Loaded hole with water, shot pipe at 3111', pressured up to 1500 lb. pressure. Shot pipe at 2989', pumped load of water at 900 lb. pressure. Pumped 40 barrels oil and 80 barrels water, worked pipe, shot pipe at 2827', worked pipe loose and pulled 90 joints. Bailed hole to 250', set 10' rock bridge and ran 25 sacks of cement. Mudded hole to 40', 10' rock bridge and ran 10 sacks of cement. Tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
JAN 7 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address Chase, Kansas


STATE OF Kansas, COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn by oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____

Chase, Kansas
(Address)

Subscribed and sworn to before me this 31 day of December, 19 69



Margaret Malcher
Notary Public.

My commission expires 2/15/71

LION OIL COMPANY

CHITWOOD NO. 7

CENTER 1/2 NW/4 NE/4, SECTION 23-28S-12W,
PRATT COUNTY, KANSAS

6" O.D. casing cemented at 320'
5-1/2" O.D. casing cemented at 4481'

Drilling commenced 9-17-45
Drilling completed 10-14-45

| FROM | TO | FORMATION | REMARKS |
|------|------|---|--|
| 0' | 120' | Red Bed | |
| 120 | 200 | Sand | 6" O.D. casing cemented with 200 sacks bulk cement at 320'. |
| 200 | 245 | Red bed and sand | |
| 245 | 330 | Red bed and shells | |
| 330 | 700 | Red bed and shale | |
| 700 | 1099 | Shale and shells | |
| 1099 | 1340 | Shale, salt and shells | |
| 1340 | 1630 | Shale and shells | |
| 1630 | 1690 | Lime | |
| 1690 | 1750 | Lime, broken | |
| 1750 | 1980 | Lime | |
| 1980 | 2080 | Lime, broken | |
| 2080 | 2160 | Lime and shale | |
| 2160 | 2245 | Lime | |
| 2245 | 2605 | Lime and shale | |
| 2605 | 2640 | Lime | |
| 2640 | 2685 | Shale | |
| 2685 | 2805 | Shale and shells | |
| 2805 | 2900 | Lime, broken, and shale | |
| 2900 | 2965 | Lime, broken | |
| 2965 | 3130 | Lime and shale | |
| 3130 | 3260 | Lime, sandy | |
| 3260 | 3580 | Lime, broken | |
| 3580 | 3480 | Lime and shale | |
| 3480 | 3510 | Lime | |
| 3510 | 3630 | Lime and shale | |
| 3630 | 3705 | Lime | |
| 3705 | 3913 | Lime, K. C. | |
| 3913 | 3918 | Lime | |
| 3918 | 3970 | Conglomerate Lime | |
| 3970 | 4142 | Lime | |
| 4142 | 4163 | Lime and shale | |
| 4163 | 4203 | Shale | |
| 4203 | 4239 | Shale and lime | |
| 4239 | 4278 | Shale | |
| 4278 | 4302 | Lime | |
| 4302 | 4318 | Shale and lime | |
| 4318 | 4335 | Lime and chert | |
| 4335 | 4344 | Chert | |
| 4344 | 4347 | Shale and chert | |
| 4347 | 4378 | Lime | |
| 4378 | 4408 | Simpson sand and shale | |
| 4408 | 4431 | Shale and sand | 5-1/2" O.D. casing cemented with 250 sacks Halliburton bulk cement at 4481'. |
| 4431 | 4435 | Lime and chert | |
| 4435 | 4465 | Shale and lime | |
| 4465 | 4479 | Shale | |
| 4479 | 4481 | Lime | |
| T.D. | 4481 | | |
| 4481 | 4487 | Lime (drilling deeper with cable tools) | Well acidized |

RECEIVED
STATE CORPORATION COMMISSION
DEC 18 1969
CONSERVATION DIVISION
Wichita, Kansas