


WELL PLUGGING RECORD

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 212 North Market, Insurance Bldg.
 Wichita, Kansas

Morton County, Sec. 24 Twp 32-S Rge. 42 (E) W (W)

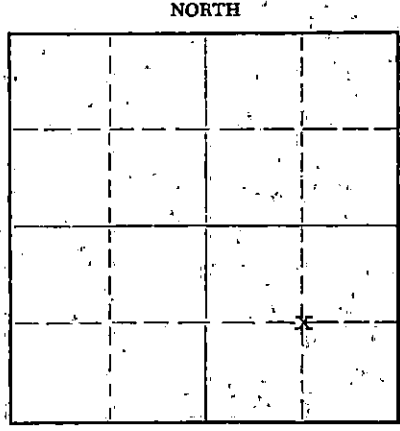

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines C SE SE
 Lease Owner Jake L. Hamon
 Lease Name Julius Stuckey Well No. 1
 Office Address 511 Midland Savings & Loan Bldg., Midland, Texas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed September 3, 1960 19 60
 Application for plugging filed September 5 19 60
 Application for plugging approved September 3 19 60
 Plugging commenced 8:00 P.M. 9-3 19 60
 Plugging completed 1:00 A.M. 9-4 19 60
 Reason for abandonment of well or producing formation Not Productive

If a producing well is abandoned, date of last production _____ 19 ____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. W. Lackamp
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5408 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Clay & Sand		0	660	8 5/8"	1499.27'	None
Red Bed		660	1054			
Red Bed & Gyp		1054	1487			
Anhydrite		1487	1500			
Shale & Sand		1500	1915			
Shale & Lime		1915	3260			
Lime		3260	3570			
Lime & Shale		3570	5083			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Shale & Sand	5083	5134
Shale	5134	5228
Shale & Sand	5228	5347
Lime & Shale	5347	5408

Filled hole by pumping mud laden fluid down drill pipe from 5408' to 2445'. Set cement plug by pumping cement down drill pipe from 2445' to 2013' using 120 sacks cement; pumped mud laden fluid down drill pipe from 2013' to 654'. Set cement plug from 654' to 534' by pumping 25 sacks cement down drill pipe. This plug is in the 8 5/8" casing. Filled casing with mud laden fluid from 534' to within 24' of the top of 8 5/8" casing by pumping down the drill pipe. Set 10 sacks cement. Plug from 24' to top of 8 5/8" casing by pumping down the drill pipe; cement overflowed at top of the 8 5/8" casing

RECEIVED
 STATE CORPORATION COMMISSION
 9-16-60
 SEP 16 1960

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor Halliburton Cementing Company
 Address Liberal, Kansas

STATE OF Texas COUNTY OF Midland ss.
H. W. Shaw (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
 (Signature) H. W. Shaw

SUBSCRIBED AND SWORN TO before me this 14 day of September, 19 60
J. W. Pettus
 Notary Public In and For Midland County, Texas
 My commission expires 6-1-61
 (Address) _____
J. W. Pettus
 Notary Public.