

15-095-00091-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
800 Bittling Building,
Wichita, Kansas

Kingman County. Sec. 15 Twp. 30S Rge. 7W (E) (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE $\frac{1}{4}$ NE $\frac{1}{4}$ SW $\frac{1}{4}$
Lease Owner Mr. S. F. Kinert
Lease Name Kinert Well No. 1
Office Address Box 1440, Tulsa, Oklahoma
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole
Date, well completed January 6 1943
Application for plugging filed 193
Application for plugging approved January 8, 1943 193
Plugging Commenced January 5, 1943 193
Plugging Completed January 6, 1943 193
Reason for abandonment of well or producing formation Not applicable

NORTH

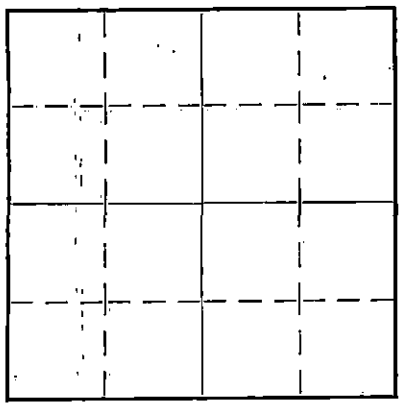

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Williams of Wichita, Kansas office.
Producing formation Depth to top Bottom Total Depth of Well 4807 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Topeka Lime	Dry	2710	2880	10 3/4"	234'	0
Mississippi Lime	Dry	4125	4380			
Simpson Sand	Dry	4535	4550			
Arbuckle Lime	Dry	4674	4807			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole was filled with heavy mud from 4807 to 15' Cement Plug from 15' to top of surface pipe.

PLUGGING
FILE SEC 15 T 30 R 7W
BOOK PAGE 60 LINE 23

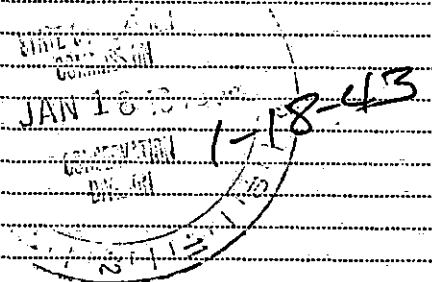

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to H. F. WILCOX OIL & GAS CO.
Address P. O. Box 1440, Tulsa, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

J. F. Nickell (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

H. F. WILCOX OIL & GAS CO.
(Signature) J. F. Nickell
Assistant General Field Superintendent
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of January 1943

Kate Dickson
Notary Public.

My commission expires 16-1484


My commission expires Jan. 8, 1947

No. 1 Kinert 1457
 Section 15 Twp. 30S Rge. 7W Kingman County, Kansas.

November 21, 1942
 January 5, 1943

Co. Tools - String #2 Dry Hole

Hard Sand	0	50	
Sand and Shale	50	160	
Shale and Red Bed	160	261	
Ran 12 Jts. 234' of 10 3/4" Surface Pipe and cemented with 140 sacks.			
Red Rock and Shale	261	460	
Shale and Shells	460	858	
Lime	858	868	
Shale and Gyp Shells	868	975	
Shale and Lime Shells	975	995	
Shale and Salt	995	1134	
Gyp	1134	1145	
Shale and Gyp	1145	1225	
Gyp and Lime	1225	1270	
Shale and Lime	1270	1360	
Gyp and Shale	1360	1380	
Lime	1380	1410	
Lime Shells and Shale	1410	1435	
Fort Riley Lime	1435	1465	
Lime and Shale	1465	1525	
Lime	1525	1552	
Shale	1552	1570	Base Florence Flint 1570'
Shale and Lime Shells	1570	1595	
Shale and Lime	1595	1630	
Lime	1630	1645	
Lime and Shale	1645	1670	
Lime Shells and Red Rock	1670	1680	
Lime and Shale	1680	1705	
Shale and Lime Shells	1705	1719	
Lime	1719	1732	
Shale and Lime	1732	1775	
Shale and Lime Shells	1775	1815	
Lime	1815	1860	
Shale and Lime Shells	1860	1900	
Shale and Lime	1900	1945	
Lime	1945	1980	
Shale and Shells	1980	2010	
Shale and Lime	2010	2100	
Shale and Sandy Lime	2100	2135	
Shale and Lime	2135	2190	
Lime and Shale	2190	2200	
Shale	2200	2318	
Lime	2318	2330	
Shale and Lime	2330	2345	
Sand and Shale	2345	2378	
Tarkio Lime	2378	2385	
Shale and Lime	2385	2395	
Lime	2395	2405	
Shale	2405	2455	
Shale and Shells	2455	2495	
Lime	2495	2545	
Lime and Shale	2545	2605	
Shale	2605	2607	
Lime	2607	2647	
Shale and Shells	2647	2710	
Topeka Lime	2710	2745	
Topeka Lime	2745	2880	
Shale and Lime	2880	2890	
Lime	2890	2935	
Shale and Lime	2935	2955	
Lime and Shale	2955	3015	
Lime	3015	3054	
Shale	3054	3075	
Lime and Shale	3075	3113	
Sand	3113	3116	
Lime	3116	3150	
Shale and Lime	3150	3160	
Shale	3160	3220	
Shale	3220	3265	
Shale and Shells	3265	3310	
Shale	3310	3321	
Lansing Lime	3321	3475	
Lime and Shale	3475	3525	
Shale	3525	3565	
Shale and Lime	3565	3595	
Kansas City Lime	3595	3621	
Shale and Lime	3621	3680	
Lime	3680	3700	
Lime and Shale	3700	3726	
Lime	3726	3756	

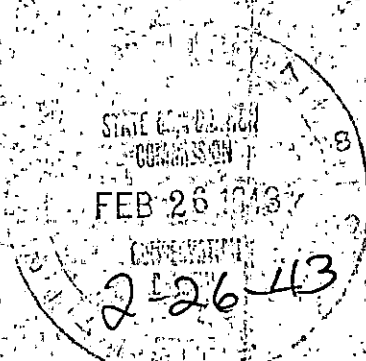

Cont.

Lime and Shale	3726	3789
Lime (Cored 3789-3799)	3789	3799
Lime and Shale	3799	3958
Lime and Shale	3958	4068
Shale and Lime	4068	4125
Mississippi Chatt (Cored 4128 to 4138')	4125	4138
Mississippi Chatt	4138	4220
Lime (Mississippi)	4220	4380
Shale and Shells	4380	4420
Kinderhook Shale	4420	4450
Shale and Shells	4450	4505
Chattanooga Shale	4505	4535
Simpson Sand	4535	4540
(Cored from 4538 to 4540) 2' Recovery.		
Simpson Sand	4540	4550
(Cored 4545 to 4550 with full recovery).		
Lime	4550	4558
Sandy Lime and Shale	4558	4573
Lime and Shale	4573	4593
Shale and Shells	4593	4598
Sand and Shale	4598	4604
Shale and Lime	4604	4622
Shale and Shells	4622	4674
Arbuckle Lime	4674	4710
(Cored 4681 to 4695)		
Arbuckle Lime	4710	4771
Arbuckle Lime	4771	4807

4807 T.D. Mixing Heavy Mud to Plug Hole.

6-7-8 Was spent in filling hole to within 15' of surface with heavy mud. Last 15' to surface with cement.

4807' T.D.