

15-151-10476-00-00

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 2 1971  
CONSERVATION DIVISION  
Wichita, Kansas

Form CP-4


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

Pratt County, Sec. 26 Twp. 28 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines NE NW NW  
Lease Owner Raymond Oil Co., Inc.  
Lease Name Chitwood D#8 Well No. \_\_\_\_\_  
Office Address Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 2/11/71 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 2/18/71 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation depleted.

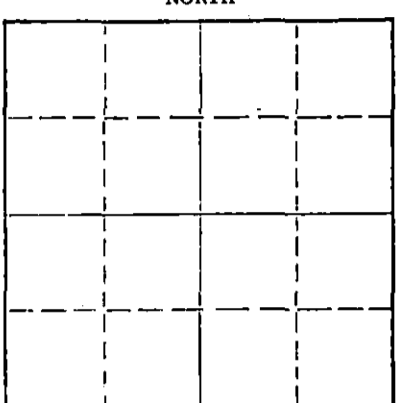

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4415 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 10-3/4	350	none
				5 1/2"	4398'	1700'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole, sanded hole to 4300' and set 5 sacks of cement.  
Shot pipe at 2970', spotted 40 barrels oil at 1100# pressure.  
Shot pipe 6 times, got loose at 1700', pulled 55 joints. Set rock bridge at 340', ran 40 sacks of cement. Mudded hole to 40' rock bridge and ran 15 sacks of cement. Talled pipe.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN to before me this 24th day of February, 19 71



My commission expires 2/15/75  
[Signature] Notary Public.

AUG 12 1944

Company Cities Service Oil Co. Well No. 1 Farm Mogaffin  
 Location NE NW NW  
330' South and 990' East of NW Corner Sec. 26 T. 28 R. 12W  
 Elevation 1857 County Pratt State Kansas  
 Initial Prod. BHP Gauge Potential: 1750 oil, no water; Contractor Corbett-Barbour Drlg. Co.  
2 1/2 hrs.  
 Acid None Drlg. Comm. May 23, 1944  
 T. D. 4415' Drlg. Comp. June 27, 1944

CASING RECORD:

10-3/4" @ 355' cem. 225 sx bulk cem.  
 5-1/2" @ 4398' cem. 400 sx bulk cem.

FORMATION RECORD:

red bed, shale & shells	0-358
red bed	559
red bed, shale & shells	865
shale & red bed	1211
shale, salt & shells	1600
shale & lime	1751
lime	1850
shale & lime	2015
lime	2210
shale & lime	2292
lime	2499
lime & shale	2600
shale & lime	2700
lime & shale	2793
shale & lime	2935
lime	3037
lime & shale	3330
shale & lime	3443
lime & shale	3514
lime	3985
sandy lime	3994
lime	4167
sandy lime	4194
shale & lime	4220
lime	4235
lime & shale	4270
shale & lime	4300
shale & chert	4333
chert	4350
shale, lime & chert	4366
lime & chert	4381
lime & shale	4393
sand	4398
sand	4415 TD

4398 Rot. TD = 4401SIM

Corr. Top Viola 4298'  
 Corr. Top Simpson 4396'  
 Penetration 19'  
 Total Depth 4415'

Loaded hole with 2000' water.  
 At 4409 hole filled 2000' to  
 2800' (800') in 1 1/2 hours; at  
 4412 hole filled 2800' to 3800'  
 (1000') in 2 hours.

SLOPE TEST (ACID BOTTLE):

500' OK  
 1000' OK  
 1500' OK  
 2000' OK  
 2500' OK  
 3500' OK

RECEIVED  
 STATE CORPORATION COMMISSION  
 OCT 8 1970  
 CONSERVATION DIVISION  
 Wichita, Kansas