


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

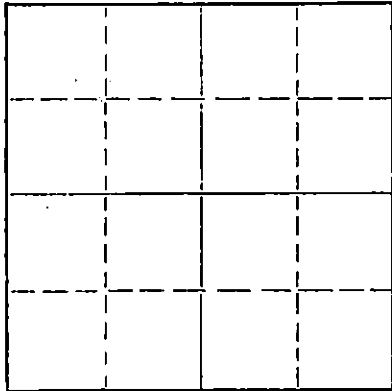

Locate well correctly on above
Section Plat

Kingman County, Sec. 35 Twp. 28 Rge. 6 (E) W (W)
Location as "NE/CNW&SW¼" or footage from lines NE NE SW
Lease Owner Drillers Production Company, Inc.
Lease Name Garnett Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 2-7-64 _____ 19____
Plugging completed 2-11-64 _____ 19____
Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4337 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	262'	None
				5-1/2"	4335'	1419'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded hole to 3925', and dumped 5 sacks of cement @ 3925' with dump bailer. Pulled 5 1/2" casing, bailed hole to 280', set rock bridge to 270' and dumped 25 sacks of cement @ 270' with dump bailer. Mudded hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

FEB 20 1964

CONSERVATION DIVISION
Wichita, Kansas

2-20-64

PLUGGING COMPLETE.
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of February, 1964

My commission expires May 20, 1964
Milton J. Tolin Notary Public.

15-095-00333-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock,
Wichita, Kansas


COPY

Company- DRILLERS PRODUCTION CO.
Farm- Garnett No. 1

SEC. 35 T. 28 R. 6W
NE NE SW

Total Depth. 4337'
Comm. 10-19-59 Comp. 11-24-59
Shot or Treated.
Contractor. Gabbert & Jones Drig.
Issued. 1-30-60

County Kingman
KANSAS



Elevation. 1460' RB

Production. 4,500,000 MCF/D

CASING:

8 5/8" 262' cem w/225 sx.
5 1/2" 4335' cem w/200 sx.

Figures indicate Bottom of Formations.

red rock	160
red rock & shale	262
shale	825
Anhydrite	840
shale & shells	1350
sandy lime	1375
lime	1680
lime & shale	1785
shale & shells	2120
shale & lime	2290
shale & shells	2450
sandy lime	2515
shale & lime	2915
lime	2997
shale	3135
shale & sand	3160
lime & shale	3273
lime	3368
lime & shale	3492
lime	3525
lime & shale	3566
lime	3645
lime & shale	3895
shale	3910
lime & chert	3931
lime	3978
lime & chert	4018
lime	4095
shale	4155
shale & chert	4175
lime	4200
shale	4307
lime	4337
Total Depth	

TOPS:

Heebner Shale	2850
Douglas Shale	2882
Lansing Lime	3120
Kansas City	3352
Base Kansas City	3594
Mississippi Chert	3916
Mississippi Lime	3940
Kinderhook	4200
Viola Dolomite	4311
Simpson Dolomite	4332
Simpson Sand	4334
RTD	4336

DST 3504-19', op 1 hr, rec. 150' muddy salt water, IFCIP 1510#-1500#/30 mins.

DST 3919-35', op 1 hr, gas/12", TSTM, rec. 65' GCM, IFCIP/30" 1503#-1403#.

DST 3942-62', op 40 mins, gas/3", 3,310 MCF/5", 3800 MCF/10", 3,300 MCF/25", stabilized, rec. 30' gassy oily salt water, IFCIP/30", 1529#-1467#.