

15-095-00544-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

### WELL PLUGGING RECORD

Kingman County. Sec. 11 Twp. 29 Rge. 9 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines. NE SE SW

Lease Owner Cities Service Oil Company

Lease Name Amsden Well No. 2

Office Address Box 144, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed September 14, 19 54

Application for plugging filed February 6, 19 58

Application for plugging approved February 7, 19 58


Plugging commenced February 11, 19 58

Plugging completed February 22, 19 58

Reason for abandonment of well or producing formation Depleted Formation

If a producing well is abandoned, date of last production February 6, 19 58

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

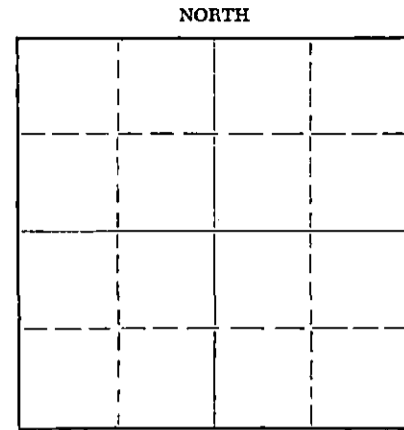

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred Hampel

Producing formation Viola Depth to top 4476' Bottom 4506' Total Depth of Well 4506' Feet

Show depth and thickness of all water, oil and gas formations. P.B.T.D. 4496'

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TD	SIZE	PUT IN	PULLED OUT
				8 5/8"	342'	None
				5 1/2"	4506'	3264'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

- 4496' - 4460' river sand
- 4460' - 4420' 5 sacks cement
- 4420' - 300' heavy mud
- 300' - 230' wood plug, rock bridge & 20 sacks cement
- 230' - 40' mud
- 40' to base of cellar - wood plug, rock bridge & 10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION

MAR 5 1958

CONSERVATION DIVISION  
Wichita, Kansas

3-5-58

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Wilson Inc., J. L. King (Operator)

Address Box 254, Stafford, Kansas

STATE OF Kansas, COUNTY OF Barton, ss. V. M. Conover (employee of owner) or conservation officer

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover

Box 144, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of March, 19 58

My commission expires March 12, 1959

N. G. Smith  
Notary Public.

PLUGGING  
FILED MAR 11 T 29 R 94  
BOOK PAGE 81 LINE 15

# WELL RECORD

Company Ottawa Service Oil Co. Well No. 2 Farm Amidon  
 Location 990' North and 390' West of S/4 Cor. Sec. 11 T. 29 R. 9W  
 Elevation 1702 (1700 Cr.) County Kingman State Kansas  
 Drlg. Comm. July 6, 1954 Contractor Barbour Drilling Company  
 Drlg. Comp. August 23, 1954 Acid 250 gals. 9-2-54  
 T.D. 4506' Initial Prod. B.H.P. Gauge Potential: 3000 oil, no water, 24 hrs.  
 P.B.T.D. 4496' (Ind. cap. 8794 B/D) (9-14-54)

**CASING RECORD:**

2-5/8" @ 342' cem. 250 ex cement  
 5-1/2" @ 4506' cem. 150 ex cement

**FORMATION RECORD:**

surface soil & sand	0-40
clay, shale & red rock	344
red bed & shale	740
shale & shells	1510
anhydrite	1535
shale & lime	1570
lime & shale	2180
shale & shells	2340
shale	2715
shale & shells	2815
shale & lime	3235
lime & shale	3505
lime, sand & shale	3555
lime & shale	3610
lime	3811
lime & shale	3850
lime	4030
lime & shale	4170
shale & lime	4225
cherty lime	4275
cherty lime & shale	4290
lime & shale	4400
shale	4450
shale & lime	4490
shale, lime & chert	4495
cherty lime	4510

4510 RTD = 4506 SIM

Corr. Heebner	3351'
Corr. Dodge	3370'
Corr. Douglas	3392'
Corr. Lansing	3546'
Corr. Mississippi	4206'
Corr. Kinderhook	4301'
Corr. Viola	4476'
Penetration	30'
Total Depth	4506'

Drilled cement to 4496 S.L.M.

Perf. 41 chote 4476-86

850' oil in 15 mins.  
 2566' oil in 1 hr. 20 mins.  
 2716' oil in 1 hr. 30 mins.  
 Hole full oil and flowing in 4 hrs. 15 mins.

SYFO:	344'	0°
	500'	0°
	1000'	1°
	1500'	0°
	2000'	0°
	2500'	0°
	3000'	0°
	3500'	1°

**PLUGGING**

FILE SEC 11 T. 29 R. 9W

BOOK PAGE 01 LINE 15

RECEIVED

STATE CORPORATION COMMISSION

FEB 7 1958

CONSERVATION DIVISION  
 Wichita, Kan.