

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Pratt County. Sec. 13 Twp. 29S Rge. (E) 13 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE/4, SE/4, SE/4
Lease Owner Stanolind Oil and Gas Company
Lease Name Loyd Killingsworth Well No. 1
Office Address Box 591, Tulsa 2, Oklahoma

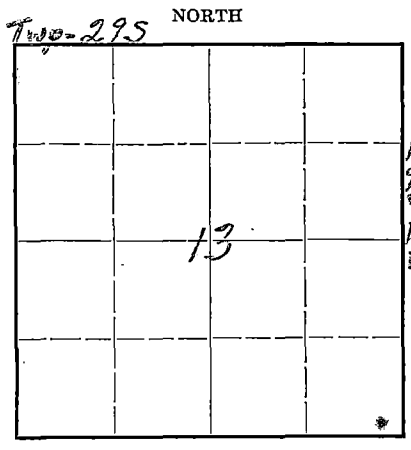

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Jan. 9 19 47
Application for plugging filed Jan. 14 19 47
Application for plugging approved (Verbal) Jan. 21 19 47
Plugging commenced Jan. 22 19 47
Plugging completed Jan. 25 19 47

Reason for abandonment of well or producing formation No Oil or Gas in Commercial quantities encountered
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. H. W. Kerr
Producing formation None Depth to top Bottom Total Depth of Well 4610 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	846	None
				5-1/2"	4518	3196

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
Cement from 4610' to 4480'; Mud from 4480' to 300'; Cement from 300' to 255'; Mud from 255' to 30' and capped to cellar base with 10 sacks cement.

PLUGGING
FILE 13 29 13W
92 LINE 42

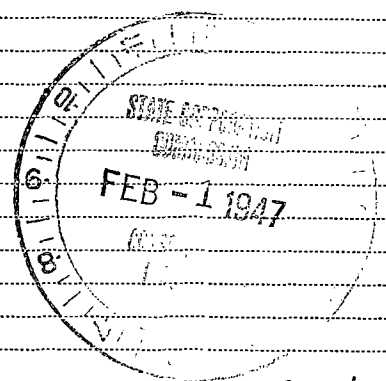

2-1-1947

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Mr. C. B. Snyder
Address Box 518, Zenith, Kansas

STATE OF Kansas, COUNTY OF Stafford, ss.
Mr. C. B. Snyder - Field Supt. (employee of owner) or ~~owner~~ of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. B. Snyder
Zenith, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 31 day of January 1947

My commission expires Dec 20, 1947 Notary Public.

FORMATION RECORD

DESCRIBE EACH FORMATION DRILLED. INDICATE THICKNESS, CONTENT AND WHETHER DRY, OR OIL, GAS, OR WATER BEARING.

FORMATION	TOP	BOTTOM	FORMATION	TOP	BOTTOM
All measurements are from Derrick Floor. Elevation: 1915'					
Cellar	0	10			
Sand & Gravel	10	60			
Sand	60	240			
Red Bed	240	280			
Sand & Red Bed	280	375			
Red Bed	375	440			
Red Bed & Shells	440	685			
Red Bed	685	765			
Anhydrite	765	785			
Red Bed & Shells	785	844			
Shale & Shells	844	1445			
Shale & Salt	1445	1590			
Shale & Shells	1590	1790			
Lime	1790	1920			
Lime & Shale	1920	3100			
Lime	3100	3280			
Lime & Shale	3280	3415			
Lime	3415	3530			
Sandy Lime	3530	3570			
Lime	3570	3835			
Lime & Shale	3835	3859			
Lime	3859	3880			
Lime & Shale	3880	3930			
Geol. Top Lansing	3890				
Lime	3930	3960			
Lime	3960	4419			
Geol. Top Mississippian	4351				
Geol. Top Kinderhook	4417				
Shale	4419	4484			
Geol. Top Viola	4480				
Lime	4484	4488			
Lime, Chert & Green Shale	4488	4490			
Sandy Lime & Shale	4490	4493			
Crystalline Lime	4493	4495			
Lime, Dolomite	4495	4496			
Lime, Shale & Chert	4496	4499			
Chert	4499	4507			
Chert & Lime	4507	4543			
Sandy Lime	4543	4576			
Soft Sand	4576	4578			
Lime	4578	4592			
Geol. Top Simpson	4592				
Shale & Sand	4592	4595			
Sand	4595	4610			
Total Depth		4610			
Plugged back to 1/2 sacks cement		4592			
Plugged back total depth		4592			
Completed as dry Hole:	1-9-47				