


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD  
Strike out upper line  
when reporting plug-  
ging off formations.

NORTH

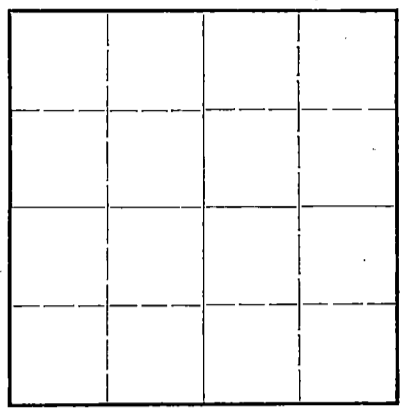

Locate well correctly on above  
Section Flat

Sedgwick County. Sec. 8 Twp 27S Rge. 4 (E) W (W)  
Location as "NE1/4NW1/4SW1/4" or footage from lines. NW-NW-NW  
Lease Owner. Anderson-Prichard Oil Corp.  
Lease Name. Bartholomew Well No. 1  
Office Address. Oklahoma City, Okla  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed. January 18 19 45  
Application for plugging filed. February 7 (Verbal) 19 45  
Application for plugging approved. February 7 (Verbal) 19 45  
Plugging commenced. February 15 ( ) 19 45  
Plugging completed. February 17 19 45  
Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19.  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes


Name of Conservation Agent who supervised plugging of this well. Dwight Lilly  
Producing formation. Depth to top. Bottom. Total Depth of Well. 4043 1/2 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Viola	Water and some oil	4035	4043 1/2	10/8 5 1/2	279 4034	None Apx. 3300

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Placed 3 sack cement plug in bottom of hole. Filled with heavy mud to 300 feet. Bridged hole with 10 foot rock bridge, base 300 feet. Placed 10 sack cement plug on top of bridge. Filled hole with heavy mud to 10 feet. Bridged hole with 10 feet rock bridge and placed 5 sack cement, plug on top of bridge.

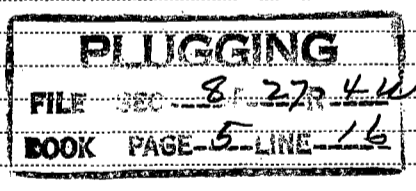

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Anderson-Prichard Oil Corp.  
Address. 100 Apco Tower, Oklahoma City, Okla.

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
M. W. Smith (employee of owner) or (owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. W. Smith 3-1-45  
609 Orpheum Bldg.,  
Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 19 45.

My commission expires January 27, 1947  
Dwight E. Turner  
Notary Public.

ANDERSON RICHARD OIL CORP.  
Bartholomew Well No. 1

SECTION TWP 27 R 4 W  
NW/4 NW/4 NW/4  
SEDGWICK COUNTY

Total Depth with rotary tools 4042  
Drilling began 12-1-44  
Drilling comp. 12-27-44  
Drilling Contractor H. M. Williams

CASING

10" 279 7 jts  
5 1/2" 4035 116 "

Figures indicate Bottom of Formations

Soil, sand, keal or shale	60	
sand & shale	150	
shale & shells	400	
shale	635	
anhydrite & shale	850	
shale & shells	1200	
lime & shale	1300	
shale & shells	1455	
lime & shale	1580	
shale & shells	1890	
lime & shale	1925	
shale & shells	2055	
lime & shale	2520	
lime	2565	
lime & shale breaks	2645	
lime	2745	Lost mud 2690-94
lime & shale	2820	
lime	3280	Drill stem test at 3200 had 60' of salt water
lime & shale	3310	
shale & shells	3375	
lime & shale	3445	
lime	3480	
lime & shale	3565	
shale & shells	3600	
shale	3625	
lime (Miss)	3630	Top Miss. lime 3625
chert & lime	3668	
chert	3683	
chert & lime	3840	
lime & shale	3900	
shale & shells	3960	
shale	4035	
lime (Viola)	4042	Cored 4037-42 Top Viola 4035
Total depth with rotary tools	4042	

