


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kingman County, Sec. 14 Twp. 29 Rge. 9 (E) W. (W)
Location as "NE/CNW/SW" or footage from lines 990' S. & 330' E. of N/4 Cor.
Lease Owner Cities Service Oil Company
Lease Name Mueller "D" Well No. 2
Office Address Box 144, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed March 27, 19 55
Application for plugging filed May 29, 19 57
Application for plugging approved June 3, 19 57
Plugging commenced June 7, 19 57
Plugging completed June 14, 19 57
Reason for abandonment of well or producing formation Formation depleted.

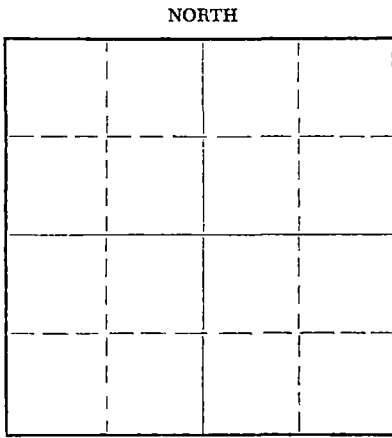

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production April 22, 19 57
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Viola Depth to top 4487 Bottom 4507 Total Depth of Well 4507 Feet
Show depth and thickness of all water, oil and gas formations. P. B. T. D. 4495'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	325'	None
				5-1/2"	4507'	3241'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4495-4445', river sand. Lost wire line, and drove same to 3700'.
3700-3660', wire line bridge and 5 sacks cement.
3660- 300', heavy mud.
300- 230', rock bridge and 20 sacks cement.
230- 35', heavy mud.
35' to base of cellar, rock bridge and 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JUN 18 1957 6-18-57

CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet) Wichita, Kansas

Name of Plugging Contractor Wilson, Inc. - J. L. King, Operator
Address Stafford, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
V. M. Conover (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. M. Conover
Box 144, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of June, 19 57

My commission expires March 12, 1959. W. B. Smith Notary Public.

PLUGGING
FILE SEC 14 T. 29 R. 9W
BOOK PAGE 16 LI. 24

WELL RECORD

Company Cities Service Oil Co. Well No. 2 Farm Muller "D"
 Location 990' South and 330' East of N/4 Cor. Sec. 14 T. 29 R. 9W
 Elevation 1693 (1691 Cr.) County Kingman State Kansas
 Drlg. Comm. March 12, 1955 Contractor Harbour Drilling Company
 Drlg. Comp. March 27, 1955 Acid 250 gals. 4-2-55; 250 gals. 4-7-55
 T. D. 4507' Initial Prod. Physical Potential: 52 oil, 492 water, 24 hrs. (5-2-55)
 P. B. T. D. 4495'

CASING RECORD:

8-5/8" @ 325' cas. 250 sac cement
 5-1/2" @ 4507' cas. 150 sac cement

FORMATION RECORD:

sand & shale	0-110
red bed	326
shale & shells	1365
anhydrite	1375
shale & shells	1630
shale & lime	1710
lime	1850
lime & shale	2025
lime	2085
shale	2330
shale & lime	2575
lime & shale	2700
shale & lime	2850
lime & shale	3100
shale & lime	3255
lime & sand	3370
lime & shale	3475
shale & lime	3595
lime	4168
shale & lime	4215
lime & chert	4237
lime	4260
chert	4301
lime & chert	4330
shale	4385
shale & lime	4430
shale & sand	4470
shale & chert	4493
lime	4507

4507 STD = 4507 SIM

Lensing 3554'
 Mississippi 4223'
 Kinderhook 4312'
 Viola 4487'
 Penetration 20'
 Total Depth 4507'

Drilled cement to 4495 S. L. M.

Perf. 9 shots 4487-89.

4-2-55 Acidized 250 gals.
 4-4-55 Pumped 68 oil, 196 water, 24 hrs.

Got retainer at 4457 and squeezed with 63 sacks cement; 58 sacks through perforations, 4000# standing pressure.

Drilled cement to 4495 S. L. M.
 Perf. 14 shots 4486-89

4-7-55 Acidized 250 gals.

SLOPE TEST (TORCO):

326'	0°
500'	3/4°
1000'	1-1/4°
1500'	3/4°
2000'	1/2°
2500'	0°
3000'	0°
3500'	1-1/2°
4000'	1°

RECEIVED
 STATE CORPORATION COMMISSION

JUN 3 X 1957

CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING

FILE SEC 14 T. 29 R. 9W
 BOOK PAGE 16 LINE 24