

F. W. MORGAN
GEOLOGIST

WICHITA OFFICE 685 - 6361

1721 PARKWOOD LANE WICHITA, KANSAS 67218

COYVILLE OFFICE 692 - 5473

June 20, 1980

Mr. Jimmy Razook
2101 E. 21st. St.
Wichita, Kansas, 67214

Re: Your No. 17-A Razook
Sec. 10-27S-4E
Butler County, Kansas

Dear Sir:

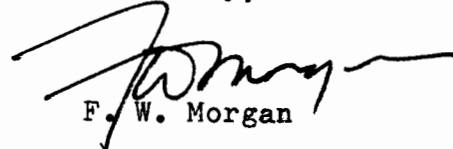
Enclosed is my geological log on the 17-A Razook well. On the log is all pertinent geological information on this well. Listed below in ascending order are intervals (depths) which are recommended for perforation for production or for water injection. These are drilling depths and must be corrected to log depths:

Simpson - 2487 - 91 - Sandy Dolomite with oil show.
2475 - 85 - Sand with oil show - tested in drill stem test.
2463 - 67 - Sand with oil show - tested in Drill stem test. The zones in the test gave up very little oil and do not appear to have much value.

Kansas City- 2035 - perforate as much as needed below this depth for injection.

Lansing - 1726 - 38 - perforate for production or water injection.

Sincerely,


F. W. Morgan

