

F. W. MORGAN
GEOLOGIST

WICHITA OFFICE 685 - 6361

1721 PARKWOOD LANE WICHITA, KANSAS 67218

COYVILLE OFFICE 692 - 5473

April 4, 1978

Mr. Jimmy Razook
2101 E. 21st. St.
Wichita, Kansas, 67214

Re: Your No. 1-A Jenkins
Sec. 27-27S-5E
Butler County, Kansas

Dear Sir:

In regard to the washing down of the well described above I have the following information to report. We hit the top of the core hole at 2,725 feet, total depth at about 2794 feet, and the Mississippian at about 2,796 feet. We drilled a cherty, hard dolomite to 2,811 TD. 4 $\frac{1}{2}$ " casing was landed at 2,810 feet and cemented at that depth with 85 sacks of cement. Top of the shoe joint should be at 2,785 feet from kelly bushing elevation (5' above GL).

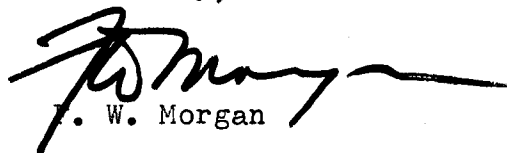
Drilling mud tally is as follows:

<u>Brought out:</u>	<u>Used:</u>	<u>Left:</u>
Magcogel - 100 sx.	41 sx.	59 sx.
Lime - 4	0	4
Hulls - 30	0	30
Soda Ash - 12	4	8
Caustic - 12	3	9
Tannathin- 12	0	12
Dick's		
Seal - 10	0	12

Daywork as far as I can determine was as follows:

3-31-78	23 hours
4- 1-78	24 hours
4- 2-78	2 $\frac{1}{2}$ " (finished cementing)

Sincerely,


F. W. Morgan