


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

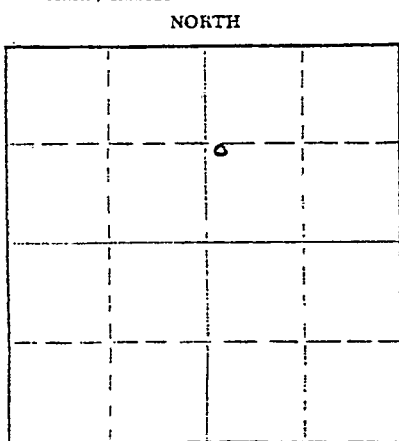

Locate well correctly on above Section Plat

Butler County, Sec. 34 Twp. 27S Rge. 5E (E) (W)
Location as "NE/CNWxSWx" or footage from lines NW SW NE
Lease Owner Salmon Corporation *
Lease Name Haverhill Unit Well No. CT-3
Office Address 823 So. Detroit, Tulsa, Oklahoma 74112
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole (Core Test)
Date well completed November 28 1968
Application for plugging filed August 22 1969
Application for plugging approved August 25 1969
Plugging commenced August 26 1969
Plugging completed August 27 1969
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ted Dewey
Producing formation Bartlesville Depth to top 2713 Bottom 2754 Total Depth of Well 2765 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Bartlesville	Oil	2713	2754	8-5/8"	202	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Drilled out top temporary plug. Set rock bridge 240' - 220'. Bailed well to 220'. Cemented to surface with 3 1/2 yards ready-mix concrete.

(FORMATION LOG on reverse side of form)

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jerry Reiserer
Address Leon, Kansas

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
George P. Alden (Agent ~~employee~~ of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. SALMON CORPORATION

(Signature) By: *[Signature]*
823 So. Detroit, Tulsa, Oklahoma 74112
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of September 19 69

My commission expires January 17, 1972

[Signature]
Notary Public.

*Well drilled by Salmon Corporation under option: owners: The Buckeye Corporation & H. H. Hart

FORMATION LOG

EN/2 34-27-SE
Haverhill Unit #3 ct

0-1847 Lime and shale
1847 - 1997 Lime (Lansing)
1997 - 2162 Shale
2162 - 2368 Lime (Kansas City)
2368 - 2407 Shale
2407 - 2414 Lime (Altamont)
2414 - 2460 Shale
2460 - 2472 Lime (Pawnee)
2472 - 2512 Shale
2512 - 2571 Lime, shaly (Fort Scott)
2571 - 2713 Shale
2713 - 2718 Sand, shaly s/o (Bartlesville)
2718 - 2754 Sand s/o
2754 - 2765 Lime (Miss.)

January - 1980

Washed down and drilled deeper to 2,800' by Jimmy Razook as No. 2 Fleming.

4½" casing set at 2,799' and cemented with 100 sacks of cement.

Perforated at 2704 to 2716 in Bartlesville.

To be used as injection well.