

15-173-61733-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission,
800 Biting Building
Wichita, Kansas

N/2 NE/4 NE/4

Sedgwick

County

Sec 1

Twp. 26

Rge. (E) 1

(W)

Location as "NE1/4NW1/4SW1/4" or footage from lines 330' from north line 330 west line

Lease Owner Phillips Petroleum Company

Lease Name A. E. Difford

Well No. 1

Office Address Bartlesville Oklahoma

Character of Well (Completed as Oil, Gas or Dry Hole) Oil well

Date, well completed 4-12-29 193

Application for plugging filed 11-18-37 193

Application for plugging approved 11-19-37 193


Plugging Commenced 11-30-37 193

Plugging Completed 12-20-37 193

Reason for abandonment of well or producing formation Exhausted

If a producing well is abandoned, date of last production 12-7-35 193

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

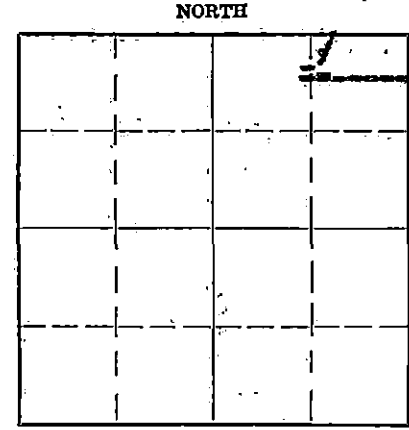

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well F. D. Carter

Producing formation KC Lime Depth to top Bottom Total Depth of Well 3405 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


Formation	Content	From	To	Size	Put In	Pulled Out
Sand	HFW	945	965	20"	120	0
Sandy shale	7 BW	1105	1125	15 1/2	701	701
Lime	2 BW	1420	1470	12 1/2	1584	1364
Lime	6 BW	1580	1625	10	2438	1440
Lime	HFW	2380		8 1/4	3054	3054
Lime	5 B oil	2574	2589	7	3385	3385
Sandy shale	6 BW	2640	2650			
Chatt	HFW	3035				
Lime	OIL	3403	3405			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pulled 7" and 8" casing in July, 1929, and plugged back with rock and lead wool to 2592.

DECEMBER 1937

Pumped in 150' of mud and cemented with 3 sacks of cement. Bridged hole at 125' with 15' cement plug. Filled with mud and capped with 5 sacks of cement.

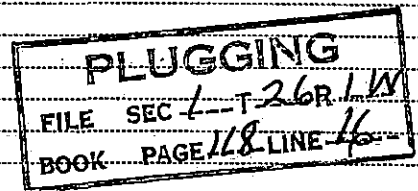

(If additional description is necessary use BACK of this sheet)

Correspondence regarding this well should be addressed to Phillips Petroleum Company

Address 610 Ellis Singleton Bldg. Wichita Kansas.

STATE OF Kansas COUNTY OF Sedgwick

C. E. Klein

(employee of owner) or operator of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. E. Klein

610 Ellis Singleton Bldg. Wichita Kansas.

(Address)

SUBSCRIBED AND SWORN to before me this 10 day of January, 1938

My commission expires April 24 1940

M. A. Miles

Notary Public.

Sand	0	53
Shale	53	215
Lime	215	225
Shale	225	240
Lime	240	250
Shale	250	265
Lime	265	305
Shale	305	315
Lime	315	345
Shale	345	365
Lime	365	380
Shale	380	390
Lime	390	425
Shale	425	445
Lime	445	475
Shale	475	490
Lime	490	535
Shale	535	550
Lime	550	575
Shale	575	585
Lime	585	645
Slate	645	655
Lime	655	685
Shale	685	695
Lime	695	710
Shale	710	725
Red rock	725	735
Lime	735	765
Shale	765	775
Lime	775	800
Shale	800	820
Lime	820	835
Shale	835	845
Red rock	845	855
Lime	855	875
Shale	875	890
Lime	890	915
Shale	915	935
Lime	935	945
Sand	945	965
Lime	965	970
Shale	970	980
Lime	980	1000
Slate	1000	1020
Lime	1020	1040
Shale	1040	1055
Lime	1055	1065
Shale	1065	1075
Slate	1075	1100
Lime	1100	1105
Sandy shale	1105	1125
Slate	1125	1150
Shale	1150	1165
Red rock	1165	1175
Lime	1175	1190
Shale	1190	1250
Lime	1250	1260
Shale	1260	1340
Lime	1340	1365
Shale	1365	1370
Lime	1370	1400
Shale	1400	1420
Lime	1420	1470
Shale	1470	1500
Sandy shale	1500	1520
Shale	1520	1540
Lime	1540	1590
Slate	1590	1625
Lime	1625	1650
Slate	1650	1675
Lime	1675	1700
Shale	1700	1740
Lime	1740	1770
Shale	1770	1790
Lime	1790	1810
Shale	1810	1820
Lime	1820	1875

Lime	1875	1890
Shale	1890	1900
Lime	1900	2060
Shale	2060	2070
Lime	2070	2080
Shale	2080	2225
Lime	2225	2250
Slate	2250	2265
Lime	2265	2275
Slate	2275	2285
Lime	2285	2380
Sandy lime	2380	2400
Lime	2400	2410
Lime	2410	2495
Slate	2495	2525
Lime	2525	2540
Shale	2540	2574
Lime	2574	2589
Shale	2589	2600
Lime	2600	2620
Shale	2620	2640
Sandy shale	2640	2650
Shale	2650	2690
Lime	2690	2715
Shale	2715	2775
Lime	2775	2820
Lime shells	2820	2855
Lime	2855	2865
Shale	2865	2875
Lime	2875	2880
Shale	2880	2890
Lime	2890	2900
Shale	2900	2905
Lime	2905	2915
Shale	2915	2920
Lime	2920	2935
Shale	2935	2950
Lime	2950	2955
Shale	2955	2010
Red rock	3010	3020
Chatt	3020	3080
Lime	3080	3288
Shale	3288	3378
Sandy shale	3378	3403
Sand (Wilcox)	3403	3405

TD 3405