

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Reno County, Sec. 2 Twp 26S Rge. (E) 4 (W)

Location as "NE/CNW/SW" or footage from lines. NE SW SE

Lease Owner The Texas Company

Lease Name J. H. Schmitz Well No. 1

Office Address 614 Bitting Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 20 19 52

Application for plugging filed (Verbal 10-20) October 21 19 52

Application for plugging approved (Verbal 10-20) October 23 19 52


Plugging commenced October 20 19 52

Plugging completed October 21 19 52

Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

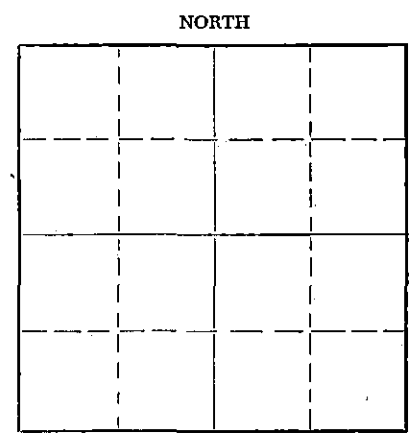

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4298 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	358	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged as follows:

- 4298 - 310 - Heavy Mud
- 310 - Wooden Plug
- 310 - 260 - 20 Sacks Cement
- 260 - 20 - Heavy Mud
- 20 - Bottom of Cellar - 5 Sacks Cement

RECORDED  
STATE CORPORATION COMMISSION  
10-31-52  
OCT 31 1952  
CONSERVATION DIVISION

Name of Plugging Contractor Anschutz Drilling Company Wichita, Kansas  
Address 709 Union National Bank Building, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.  
M. C. Harrell (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. C. Harrell  
614 Bitting Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 24 day of October, 19 52

H. Howard Kistler  
Notary Public.

My commission expires September 20, 1956

PLUGGING  
FILE SEC-2 126 R 424  
BOOK PAGE 54 102110

# LOG OF WELL

J. H. SCHMITZ NO. 1

SHEET 1

OWNER The Texas Company DIVISION Oklahoma DATE MADE 10-27-52

DISTRICT Kansss LEASE J. H. Schmitz WELL NO. 1

STATE Kansas COUNTY OR PARISH Reno TWP. 26S RANGE 4W SEC. 2

LOCATION OF WELL NE SW SE

COMMENCED RIGGING UP 9-25-52 COMMENCED DRILLING 9-25-52 COMPLETED DRILLING 10-20-52

DAY DRILLER \_\_\_\_\_ NIGHT DRILLER \_\_\_\_\_ CONTRACTOR Anschutz Drilg. Co.

CABLE FROM \_\_\_\_\_ TO \_\_\_\_\_ ROTARY FROM 0 TO 4298' COMPANY RIG NO. \_\_\_\_\_

TOTAL DEPTH 4298' MEASURED BY M. C. Herrrell ELEVATION KB - 1528

DR - 1526  
SL - 1524

### CASING RECORD

SIZE	WEIGHT	PUT IN WELL		PULLED OUT		LOST IN WELL		SHOES		PACKERS		SET AT
		FEET	INS.	FEET	INS.	FEET	INS.	LENGTH	MAKE	KIND	LENGTH	
10-3/4"	297	360										FT.
												FT.
												FT.
												FT.
												FT.
												FT.
												FT.

10-3/4" casing set at 355' with 275 sacks cement and 300' CC, cement circulated.

WAS CASING CEMENTED? \_\_\_\_\_ IF SO, HOW MANY SACKS OF CEMENT USED? \_\_\_\_\_

LINER: STATE SIZE AND WEIGHT \_\_\_\_\_ WHERE SET \_\_\_\_\_ FT. AND INS. \_\_\_\_\_ FT. AND INS. \_\_\_\_\_  
BLANK PERFORATED

HOW PUT TOGETHER: \_\_\_\_\_ COUPLING \_\_\_\_\_ FLUSH-JOINT \_\_\_\_\_ INSERTED \_\_\_\_\_

REMARKS: \_\_\_\_\_

### EQUIPMENT RECORD

TUBING				SUCKER RODS			PUMPING OUTFIT
SIZE	WEIGHT	FEET	INS.	FEET	INS.	SIZE AND KIND	DESCRIPTION, KIND, SIZE, ETC.

Completed Plugging 10-21-52

FLOWING, PUMPING, GASSER OR DRY Dry PRODUCTION FIRST 24 HOURS \_\_\_\_\_ PRODUCTION SETTLED \_\_\_\_\_

IF GAS WELL, OPEN FLOW CAPACITY \_\_\_\_\_ SHUT IN PRESSURE \_\_\_\_\_ ROCK PRESSURE \_\_\_\_\_

KIND OF SHOT \_\_\_\_\_ SIZE OF SHOT, QUARTS \_\_\_\_\_

NUMBER OF SHELLS \_\_\_\_\_ SIZE OF SHELLS \_\_\_\_\_ INCHES, DIAMETER \_\_\_\_\_

LENGTH OF SHELLS \_\_\_\_\_ FEET \_\_\_\_\_ INCHES \_\_\_\_\_ TOP OF SHOT FIVED

BOTTOM OF SHOT \_\_\_\_\_ ANCHOR \_\_\_\_\_ WELL BRIDGED TO 10-31-52

TOTAL DEPTH OF WELL \_\_\_\_\_ NUMBER OF SHOT \_\_\_\_\_ PRODUCTION BEFORE SHOT \_\_\_\_\_ BBLG. PER DAY \_\_\_\_\_

PRODUCTION AFTER SHOT \_\_\_\_\_ BBLG. PER DAY. SHOT FURNISHED BY \_\_\_\_\_

NAME OF SHOOTER \_\_\_\_\_ SHOT INSPECTED \_\_\_\_\_ BY \_\_\_\_\_ (COMPANY EMPLOYEE) \_\_\_\_\_

COMMENCED DRILLING DEEPER \_\_\_\_\_ COMPLETED \_\_\_\_\_ DRILLING DEEPER \_\_\_\_\_

TOTAL DEPTH \_\_\_\_\_ PRODUCTION FIRST 24 HOURS \_\_\_\_\_ PRODUCTION SETTLED \_\_\_\_\_

REMARKS: **PLUGGING** J. H. Schmitz #1

**PLUGGING**  
LOG ON 10-26-52  
SEE PAGE 54 LOG 10

Wildcat

TO 4298'

Completed Drilling 10-20-52

Completed Plugging 10-21-52

NOTE: IF WELL WAS DRY, STATE UNDER REMARKS, WHEN, HOW, AND BY WHOM PLUGGED.  
STATE UNDER REMARKS ANYTHING OF INTEREST NOT COVERED IN LOG.  
IF THE SPACE PROVIDED FOR REMARKS IS NOT SUFFICIENT WRITE ON BOTTOM OF LAST SHEET OF LOG.

# LOG OF WELL

SHEET No. 2

District Kansas Owner The Texas Company Farm J. H. Schmitz Well No. 1

FORMATION	AMOUNT	AMOUNT	COLOR	HARD OR SOFT	DEPTH CONES TAKEN	REMARKS
Clay & Shale	0	80				<u>CASING RECORD</u> 10-3/4" casing set at 358' with 275 sacks cement and 300# CC, cement circulated.
Sand & Shells	220	140				
Shale & Shells	364	144				
Sndy Shale & Shells	450	86				
Salt	550	100				
Shale	720	170				
Lime	870	150				
Shale & Shells	905	35				
Sand & Shale	960	55				
Shale	1015	55				
Shale & Lime	1550	535				<u>ELEVATIONS</u> KB - 1528 DF - 1526 GL - 1524
Sandy Shale	1695	145				
Shale & Lime	2400	705				
Lime	2510	110				
Lime & Shale	2615	105				
Lime	2705	90				
Shale	2815	110				
Shale & Lime	2880	65				
Lime	3304	424				
Lime & Shale	3380	76				
Shale	3428	48				<u>TOPS</u> Topeka-----2263 Heebner-----2633 Brown Lime-----2828 Lansing-----2874 Cherokee-----3506 Mississippi-----3686 Kinderhook-----4002 Viola-----4129 Simpson-----4144 Arbuckle-----4242
Lime & Shale	3705	277				
Lime & Chert	3809	104				
Chert	3835	26				
Lime & Chert	3852	17				
Chert	3881	29				
Lime	3898	17				
Chert	3918	20				
Chert & Shale	3940	22				
Lime & Shale	3992	52				
Shale	4145	153				
Shale & Sand	4150	5				
Sand	4154	4				
Shale	4185	31				
Sand & Shale	4233	48				
Shale	4247	14				
Lime	4298	51				
Total Depth	4298					

REMARKS

10-5-52 Ran DST #1 from 3082-95, open 1 hour, recovered 385' salt water. SBHP 1200# in 15 minutes.

10-9-52 Ran DST #2 from 3291-3304, open 2 hours, recovered 120' salt water SBHP 1135# in 20 minutes.

10-17-52 Ran DST #3 from 4128-45, open 45 minutes, recovered 3200' salt water, no show oil. IFP 35#, FFP 1470#, SBHP 1470# in 15 minutes.

10-18-52 Ran DST #4 from 4146-54, open 1 hour, recovered 435' sulphur water. SBHP 1310# in 15 minutes.

10-21-52 Drilled to 4298' in Arbuckle, well dry. Plugged and Abandoned.