


Rec'd Prod. pt. JUN 19 1950

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

### WELL PLUGGING RECORD

Stafford County, Sec. 29, Twp. 25, Rge. 13 (E) (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines c-NE $\frac{1}{4}$  NW $\frac{1}{4}$  SW $\frac{1}{4}$

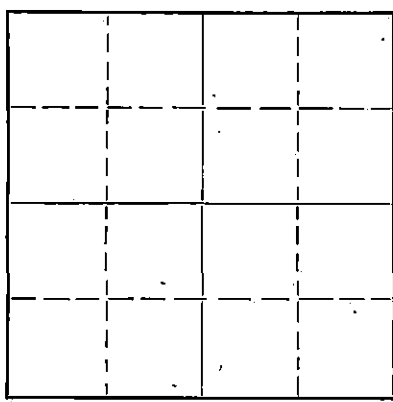

Locate well correctly on above Section Plat

Lease Owner Midstates Oil Corp.  
Lease Name J.C. McCandless Well No. 2  
Office Address 518 Nat'l. Bank of Tulsa Bldg. Tulsa, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed March 23, 1950 19.  
Application for plugging filed March 27, 1950 19.  
Application for plugging approved March 29, 1950 19.  
Plugging commenced May 31, 1950 19.  
Plugging completed June 5, 1950 19.  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19.  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C.D. Stough  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4"	1120'	none
				7"	4284'	2583'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plastic plug dumped by Dowell Inc. from 4378 to 4326. Plugged back from 4326 to 4282 with crushed rock. Plugged back from 4282 to 4271 with calseal. Plugged back from 4271 to 3420 with cement, using Halliburton HY tool on tubing. 7" casing shot off @ 2573 and pulled. Pumped 500 Sks. cement in 10-3/4" casing with Halliburton truck, cement filling to within 165' of surface. Hole filled with heavy mud to within 20' of surface. Mixed 5 Sks. cement and poured in top of surface casing. Welded steel plate on top of casing.

**RECEIVED**  
Conservation Div.  
JUL 29 1950  
STATE CORPORATION COMMISSION  
KANSAS

(If additional description is necessary, use BACK of this sheet)  
Correspondence regarding this well should be addressed to Midstates Oil Corporation  
Address 518 Nat'l. Bank of Tulsa Bldg. Tulsa, Okla.

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.  
M. G. Ahern (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. G. Ahern  
518 National Bank of Tulsa Bldg., Tulsa, Okla.  
(Address)

SUBSCRIBED AND SWORN to before me this 28th day of July, 19 50  
Bratcher & Park Notary Public  
My commission expires June 10, 1953

BRATCHER E. PARK, Notary Public  
in and for Tulsa County, Okla.  
My commission expires June 10, 1953

**PLUGGING**  
FILE SEC 29-T-25-R134  
BOOK PAGE 145 LINE 8

CORPORATION COMMISSION OF KANSAS

W E L L R E C O R D

PRODUCER: Midstates Oil Corporation  
 ADDRESS: 518 National Bank of Tulsa Building, Tulsa, Oklahoma  
 FARM NAME: J. C. McCandless WELL NO.: 2  
 WELL LOCATED C. NE/4 NW/4 SW/4 ELEVATION: 1955  
 SECTION 29 TOWNSHIP 25 S RANGE 13 W COUNTY Stafford STATE Kansas  
 INITIAL PRODUCTION Dry Hole - Plugged June 5, 1950  
 COMMENCED DRILLING January 17, 1950 DRILLING COMPLETED March 23, 1950  
 ACIDIZED WITH \_\_\_\_\_

CASING RECORD

Size	Put In	Pulled Out
10-3/4"	1120'	none
7"	4284'	2583'

Formation	Top	Bottom	Formation	Top	Bottom
Sand	0	200	Shale & Lime	4035	4065
Shale & Red Bed	200	485	Lime	4065	4125
Red Bed	485	846	Conglomerate	4125	4165
Anhydrite	846	860	Shale & Lime	4165	4215
Shale & Shells	860	1520	Cherty Lime	4215	4265
Shale & Lime	1520	2010	Lime	4265	4270
Lime	2010	2290	Lime, Chert & Shale	4270	4276
Lime & Shale	2290	2550	Chert & Lime	4276	4292
Shale & Shells	2550	2685	Lime	4292	4298
Shale & Lime	2685	3315	Sand	4298	4310
Lime	3315	3615	Sand & Lime	4310	4327
Shale & Lime	3615	3745	Lime & Shale	4327	4370
Lime	3745	4035	Lime	4370	4378

Signed: Geo. M. Vandaveer  
 Vice President  
 Geo. M. Vandaveer

Date: Aug 7, 1950

RECEIVED

Conservation Division

AUG 9 - 1950

STATE CORPORATION  
 COMMISSION  
 KANSAS

PLUGGING  
 FILE SEC 29 T 25 R 13 W  
 BOOK PAGE 24 LINE 8