


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Reno County. Sec. 12 Twp. 26S Rge. (E) 6 (W)  
Location as "NE/CNW%SW%" or footage from lines C NW SW

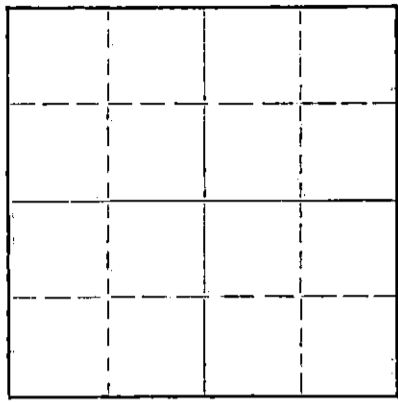

Locate well correctly on above Section Plat

Lease Owner Kewanee Oil Company  
Lease Name Ruth Well No. 1  
Office Address Box 360, Hoisington, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 5-2- 19 61  
Application for plugging filed 5-2- 19 61  
Application for plugging approved Verbal 5-2- 19 61  
Plugging commenced 5-3- 19 61  
Plugging completed 5-3- 19 61  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fred Hampel, Pretty Prairie, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 445 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Dry	2903		8-5/8"	279	None
Mississippi	"	3605				
Kinderhook	"	3804				
Misener	"	3956				
Viola	"	3981				
Simpson	"	4007				
Arbuckle	"	4112				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with mud to 240'  
Set Halliburton plug w/ 1/4 sack hulls.  
Dumped 15 sacks cement.  
Filled hole with mud to 35'.  
Set Halliburton plug w/ 1/4 sack hulls.  
Filled pipe to surface with cement.  
Plugged and abandoned at 9:30 A.M. 5-3-61.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 8 1961  
5-8-61  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Gross Drilling Company  
Address Box 510, Eldorado, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Peter Blanda (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) Peter Blanda  
Box 360, Hoisington, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of May, 19 61  
Edward W. Zuller  
Notary Public.  
My commission expires September 21, 1961

**KEMAKEE OIL COMPANY**

West Kansas District

Wildcat

Well Record & Sandology: Ruth No. 1.

Location: 1980' PSL & 660' FWL, SW/4, Section 12,  
T-26-S, R-5-W, Reno County, Kansas.

Elevation: 1500' County Marker (C.M. 3.50' above  
top of 6-5/8" casing collar).

Drilling Commenced: April 15, 1961.

Drilling Completed: May 2, 1961.

Completion Date: May 3, 1961.

Total Depth: 4145' C.M.

Perforation Record: None.

Treating Record: None.

Initial Production: None - P & A.

RECEIVED  
MAY 8 1961  
5-8-61  
KANSAS STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
Wichita, Kansas

FORMATION TOPS

	<u>Samples</u>		<u>Log</u>	
Heebner	2634	-1134	2636	-1136
Douglas	2707	-1207	2715	-1215
Lansing K.C.	2895	-1395	2903	-1403
Mississippi	3598	-2098	3605	-2105
Kinderhook	3835	-2305	3804	-2304
Miscner	3958	-2458	3956	-2456
Viola	3984	-2484	3981	-2481
Simpson	4007	-2507	4007	-2507
Arbuckle	4112	-2612	4112	-2612

Casing Record

Ran 278.55' of 6-5/8" casing and set at 262.05' C.M.  
Cemented with 225 sacks Pozmix with 2% calcium  
chloride and 1/4" floccul per sack of cement.  
Cement circulated to surface.

Formation Record

0 - 293	Top soil, clay, shale & gravel.
293 - 935	Shale, shells & sand.
935 - 1086	Shale & sand.
1086 - 1703	Shale & lime.
1703 - 1925	Shale & sand.
1925 - 2325	Shale, sand & lime.
2325 - 2575	Shale & lime.
2575 - 2756	Lime & shale.
2756 - 2895	Sand & lime.
2895 - 3019	Lime w/shale.
3019 - 3286	Lime, shale & sand.
3286 - 3598	Lime & shale.
3598 - 3690	Lime & chert.
3690 - 3818	Lime & shale.
3818 - 3930	Shale w/lime streaks.
3930 - 3989	Shale & lime.
3989 - 4020	Shale & lime.
4020 - 4145	Lime - Total Depth.