


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

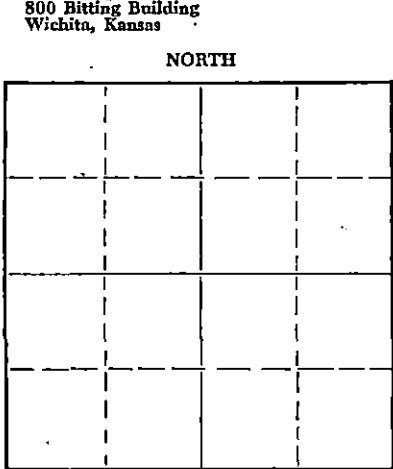

Locate well correctly on above
Section Plat

Stafford County, Sec. 3 Twp. 25 Rge. 14 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines SE SE SE
Lease Owner Helmerich and Payne, Inc.
Lease Name Waters Well No. 1
Office Address 821 Central Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 4-27-53 19
Application for plugging filed 11-11-55 19
Application for plugging approved 11-14-55 19
Plugging commenced 11-15-55 19
Plugging completed 11-26-55 19
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 10-6-55 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Warren H. Horner
Producing formation Viola Depth to top 4135' Bottom _____ Total Depth of Well 4212' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing-K.C.	Water	3696'				
Viola	Oil	4135'				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging started 11-15-55 and completed 11-26-55. Sanded back to 3715' and dumped in 5 sacks cement. Shot off casing at 3597' and pumped in 74 barrels of oil. Shot off casing at 3406' and pulled pipe out of hole. Plugged well as follows:
Squeezed surface casing with 20 sacks of aqua gel mud and 100 sacks of bulk cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Co.
Address P. O. Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Nathan E. Clark (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Nathan E. Clark
821 Central Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of November, 19 55

My commission expires March 30, 1957

Rosemary Penrose
Rosemary Penrose Notary Public.

PLUGGING
RX SEC 3-7-25 R 14W
BOOK PAGE 15 LINE 26

DEC 1 1955
12-1-55
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

COMPANY: Helmerich and Payne, Inc.

LOCATION: SE SE SE
3 - 25 - 14W
Stafford Co., Kansas

FARM: Waters

WELL NUMBER: 1

CASING: 848' of 8 5/8" 28#
4211' of 5 1/2" 14#

COMMENCED: 4 - 15 - 53

CONTRACTOR: Lewis Drlg. Co.

COMPLETED: 4 - 27 - 53

FORMATION	DEPTH
Sand	0 - 140
Shael, Sand, Shells	140 - 275
Red Bed & Shale	275 - 385
Red Bed	385 - 440
Sand	440 - 485
Red Bed & Shale	485 - 830
Anhydrite	830 - 860
Sand & Shale	860 - 960
Red Bed & Shale	960 - 1200
Shale, Salt, Shells	1200 - 1545
Shale & Shells	1545 - 1947
Shale & Lime	1947 - 2975
Shale	2975 - 3080
Shale & Lime Streaks	3080 - 3375

FORMATION	DEPTH
Shale, Lime, Sand	3375 - 3425
Shale & Lime	3425 - 3638
Shale	3638 - 3681
Shale & Lime	3681 - 3764
Lime	3764 - 3815
Lime & Shale	3815 - 4005
Shale, Cherty Congl.	4005 - 4056
Miss. Chat.	4056 - 4063
Shale & Lime	4063 - 4125
Lime	4125 - 4145
Lime & Chert	4145 - 4162
Lime	4162 - 4212
Total Depth	4212

RECEIVED

This is to certify that the above is true and correct to the best of my knowledge.

NOV 12 1955

CONSERVATION DIVISION

Nathan E. Clark

Subscribed and sworn to before me this 11th day of November, 1955.

My commission expires

July 19, 1956

Mildred Lindenmuth
Mildred Lindenmuth

PLUGGING
FILE SEC 32 T-23-R14W
PAGE 15 LINE 26