

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Stafford County. Sec. 5 Twp. 25 Rge. (E) 14 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SW SW SW
Lease Owner: J. J. Lynn
Lease Name: Wilson Well No. 3
Office Address: 1000 R. A. Long Bldg., Kansas City 6, Mo.
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed August 29 19 45
Application for plugging filed August 31 19 45
Application for plugging approved August 31 19 45
Plugging commenced August 31 19 45
Plugging completed August 31 19 45
Reason for abandonment of well or producing formation All producing formations dry

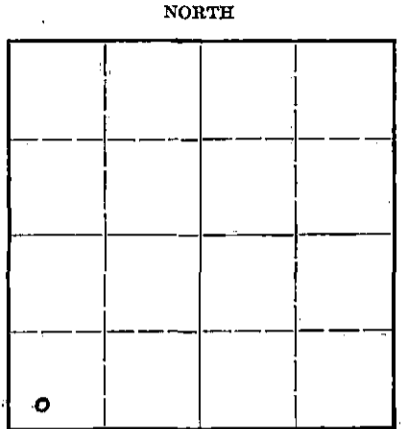

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production..... 19.....
Was permission obtained from the Conservation Division or its agents before plugging was commenced?..... Yes

Name of Conservation Agent who supervised plugging of this well..... Herb Kerr
Producing formation..... Arbuckle Depth to top..... 4380 Bottom..... Total Depth of Well..... 4446 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Red bed & shells</u>		<u>331</u>	<u>520</u>	<u>10</u>	<u>504</u>	<u>(530 sk cement)</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from..... feet to..... feet for each plug set.

Heavy mud circulated from 4446 to 400. Bridge and plug set at 400. 15 sack cement placed in hole through drill pipe on top of plug at 400. Heavy mud from top of cement to 50 or 40' from bottom of cellar. Cement from 40' to top of surface casing or bottom of cellar. Soil from bottom of cellar to 0.

FILE 5-25-45
BOOK 24-WE-33



9-4-45

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... J. J. Lynn
Address..... 1000 R. A. Long Bldg., Kansas City 6, Mo.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

H. M. Williams (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. M. Williams
701 Bitting Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of September 1945

My commission expires Feb 2, 1949

R. P. Conway
Notary Public.

J. J. LYNN
Wilson Well No. 3

SEC. 5 T. 25 R. 14 W

SW SW SW
Stafford County, Kansas

Production DRY

Elevation

Total Depth 4446
Drilling comm. 7-29-45
Drilling comp. 8-29-45
Drilling Contractor H. M. Williams

10" CASING 504

Figures Indicate Bottom of Formations

Sand	155	
shale	282	
red rock & gravel	331	
red bed & shells	520	
red rock & sand	620	
red bed	930	
anhydrite	961	
red bed, shale & shells	1310	
shale	1590	
anhydrite & shale	1721	
shale & lime shells	1855	
sandy lime	1865	
lime	2035	
lime & blue shale	2100	
lime	2160	
lime & shale	2275	
lime	2483	
lime & shale breaks	2555	
lime	2655	
lime & shale	2730	
lime	2765	
lime & shale	2838	
shale & shells	3010	
lime & shale	3028	
lime	3050	
shale & shells	3090	
shale & lime	3180	
lime	3225	
shale & shells	3275	
lime	3370	
lime & shale	3438	
sandy lime	3469	
broken lime & shale	3515	
lime	3610	
lime & shale	3650	
shale	3750	Top Kansas City 3757
lime	3977	
lime & shale	4035	
lime	4074	Cherty Conglomerate 4152
lime & shale	4168	Top Miss. Chert 4178
lime	4191	Kinderhook shale 4187
shale	4250	Viola chert 4250
Viola lime	4272	Viola lime 4319
lime & chert	4301	Simpson shale 4329
chert	4318	Simpson sand 4377-80
lime & chert	4331	
shale - Simpson	4380	Top Arbuckle lime 4382
lime - Arbuckle	4446	" " " 4380 (correct- ed)
Total Depth	4446	

FILE 5 25 14W
BOOK 24 33

