


FORMATION PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Strike out upper line
when reporting plugging
off formations.

NORTH

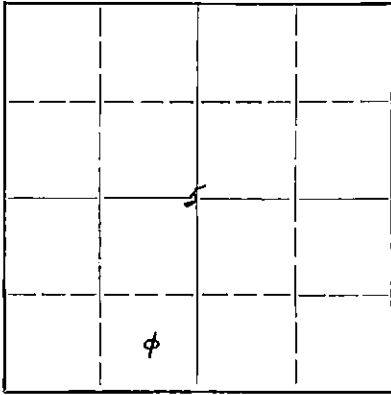

Locate well correctly on above
Section Plat

Edwards County, Sec. 5 Twp. 26 Rge. 18 (E) W (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C SE $\frac{1}{4}$ SW $\frac{1}{4}$
Lease Owner Broderick & Gordon
Lease Name Miller Well No. 1
Office Address Denver, Colorado
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 23 19 43
Application for plugging filed June 23 19 43
Application for plugging approved June 23 19 43
Plugging commenced June 23 19 43
Plugging completed June 23 19 43
Reason for abandonment of well or producing formation No Oil

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Burt Stafford
Producing formation Arbuckle Depth to top 5059 Bottom 5085 Total Depth of Well 5085 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 $\frac{3}{4}$ "	424'	None
Drilled by rotary - see log attached.						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy rotary mud from 5085' to 425'
Bridge at 425'
Cement to 375'
Heavy mud to 30'
Bridge at 30'
Cement to 6' of top of hole

DI 110015
FILE 5-26-12-44
BOOK PAGE 79-43

STATE CORPORATION COMMISSION
JUN 2 1943
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Thos. H. Allan 6-29-1943
Address 921 Union National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. A. Grant (contractor) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 28th day of June, 1943.
My commission expires April 7, 1947
Margaret O'Reilly Notary Public


15-047-10015-0600

BRODERICK & GORDON'S MILLER #1, EDWARDS CO., KANSAS
 Center of SE $\frac{1}{4}$ of SW $\frac{1}{4}$, Section 5,
 Township 26 S, Range 18 West

Started rigging up 5-17-43, tearing out 6-22-43

Ran 22 jts. 10 5/4" O.D. used pipe at 415' set at 423'
 with 250 sacks cement

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	195	
Shale & Shells	195	426	
Shale	426	500	
Sand	500	520	
Shale	520	545	
Red Bed	545	1060	Slope test 750' OK
Lime and shale	1060	1260	Slope test 1000' OK
Anhydrite	1260	1275	Slope test 1250' OK
Shale and shells	1275	1685	Slope test 1500' OK
Lime shells and shale	1685	1845	Slope test 1750' OK
Shale and shells	1845	1985	
Sand	1985	2005	
Lime	2005	2010	Slope test 2000' OK
Shale and shells	2010	2045	
Lime	2045	2065	
Lime and shale	2065	2125	
Shale	2125	2180	
Lime	2180	2470	Slope test 2250' OK
Lime and shale	2470	2510	Slope test 2500' OK
Lime	2510	2665	
Shale and shells	2665	2685	
Shale and lime	2685	2710	
Lime	2710	2910	Slope test 2750' OK
Sandy lime	2910	2915	
Lime	2915	3125	Slope test 3000' OK
Shale and lime	3125	3175	
Shale and shells	3175	3225	
Shale and lime	3225	3260	Slope test 3250' OK
Lime	3260	3310	
Shale and shells	3310	3390	
Lime and shale	3390	3450	Slope test 3500' OK
Lime	3450	4075	Slope test 3750' OK
Shale	4075	4090	
Lime	4090	4123	
Soft lime	4123	4133	
Lime	4133	4239	
Soft lime	4239	4256	
Lime	4256	4327	
Hard lime	4327	4336	
Porous lime	4336	4345	
Lime	4345	4416	
Lime and chert	4416	4431	
Lime	4431	4635	

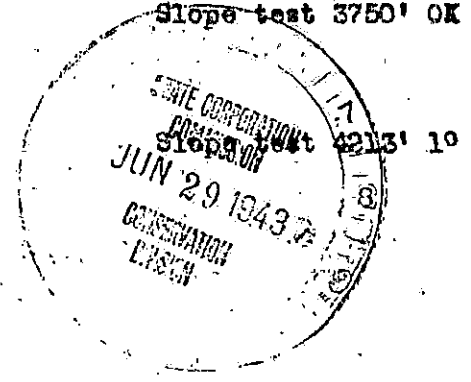


RIGGING
 FILE 26-184
 BOOK PAGE 79 LINE 43

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Chert	4635	4641	
Cherty lime	4641	4650	
Chert	4650	4652	
Lime	4652	4668	
Lime and chert	4668	4681	
Sand	4681	4702	
Lime and chert	4702	4716	
Sand and chert	4716	4736	
Lime	4736	4748	
Chert	4748	4750	
Lime	4750	4753	
Lime and chert	4753	4782	
Rough chert	4782	4784	
Lime and chert	4784	4822	
Lime	4822	4830	
Cherty lime	4830	4870	
Lime	4870	4897	
Cherty lime	4897	4927	
Rough Chert	4927	4929	
Lime	4929	4984	
Sand	4984	4995	
Lime	4995	5002	
Rough Chert	5002	5005	
Lime	5005	5012	
Rough Chert	5012	5015	
Lime and chert	5015	5030	
Lime and shale	5030	5059	
Arbuckle lime	5059	5085	
Lime	5085	5086	

DRILLING
 FILE 15 26 184
 BOOK PAGE 79 LINE 43

I, W. A. Grant, partner of Harbar Drilling Company, certify
 that to the best of my knowledge and belief, the above log
 is true and correct.

W. A. Grant

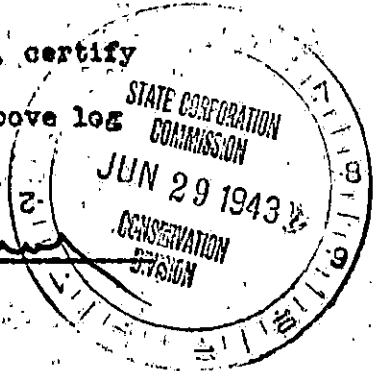

Subscribed and sworn to before
 me this 25th day of June, 1943.

My commission expires April 7,
 1947.

Margaret O'Keilly
 Notary Public