

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Edwards County. Sec. 8 Twp. 25S Rge. (E) 20(W)

Location as "NE/CNW&SW&" or footage from lines Ctr. NW NW

Lease Owner GRAYBOL OIL CORPORATION

Lease Name Boehme Well No. 1

Office Address 2200 N.B.T. Bldg., Tulsa, Okla. 74103

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 14 19 66

Application for plugging filed August 14 19 66

Application for plugging approved August 14 19 66


Plugging commenced August 15 19 66

Plugging completed August 15 19 66

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

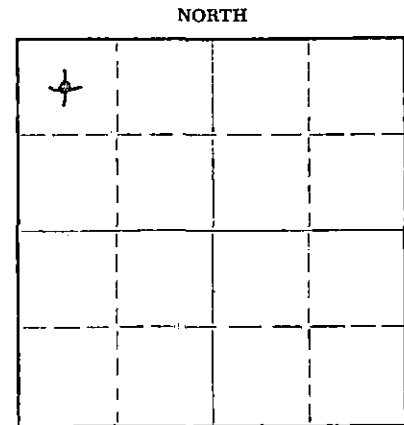

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas

Producing formation None Depth to top Bottom Total Depth of Well 4765 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing limestone	Water	4282	4366	8 5/8"	305'	None
Conglomerate	Impermeable	4692	4744			
Mississippian	Water	4744	4765			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud-laden fluid to 300'.

Inserted solid Halliburton plug. Put in twenty-five sacks of Portland cement.

Filled hole with heavy mud-laden fluid to 40'.

Inserted solid Halliburton plug. Put in ten sacks of Portland cement, filling hole to surface.

Placed two sacks of Portland cement in rat-hole.

RECEIVED
STATE CORPORATION COMMISSION

AUG 17 1966
8-17-66
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GRAYBOL OIL CORPORATION

Address As above

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.

Lyman C. Dennis (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lyman C. Dennis

Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this 16th day of August, 1966

My commission expires October 2, 1967

Notary Public

GRAYBOL OIL CORPORATION

Edwards County, Kansas

No. 1 Boehme

Ctr. NW NW Sec. 8-25S-20W

Contractor: Company Tools

Elev. 2273 KB & DF, 2267 GL

Commenced: July 30, 1966

Completed: August 14, 1966

Production: Dry and Abandoned

CASING RECORD

8 5/8" surface casing set at 305' with 160 sacks of posmix cement.

<u>DEPTH</u>	<u>FORMATION</u>	<u>ELECTRA INC. ELECTROLOG TOPS:</u>
0-85	Surface soil and clay	Stone corral anhydrite 1405 (+868)
85-115	Sand	Topeka limestone 3614 (-1341)
115-135	Red beds	Heebner shale 4012 (-1739)
135-220	Shale	Toronto limestone 4034 (-1761)
220-310	Red bed, shale & shells	Douglas shale 4044 (-1771)
310-570	Shale and shells	Brown lime 4116 (-1843)
570-670	Sand	Lansing limestone 4128 (-1855)
670-790	Red bed	Base of Kansas City 4460 (-2187)
790-1405	Shale and shells	Cherokee shale 4636 (-2363)
1405-1430	Anhydrite	Conglomerate 4692 (-2419)
1430-1988	Shale and shells	Mississippian 4744 (-2471)
1988-2380	Shale and lime	Electra total depth 4763
2380-2480	Lime and shale	
2480-2620	Chalky lime and shale	No Drill Stem Tests or Cores taken.
2620-2775	Chalky lime	
2775-2830	Shale, lime and chalk	
2830-2920	Lime and chalk	
2920-3020	Lime	
3020-3265	Lime and shale	
3265-3400	Chalky lime and shale	
3400-3679	Lime and shale	
3679-3740	Lime	
3740-3820	Lime and shale	
3820-3965	Lime	
3965-4010	Chalky lime	
4010-4035	Lime	
4035-4115	Shale and lime	
4115-4667	Lime	
4667-4705	Lime and shale	
4705-4734	Lime, sand and chert	
4734-3765	Lime and shale	
4765	Driller's Total Depth	

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 17 1966
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify that the above is a true and correct log of the above-captioned test as taken directly from the daily drilling reports.

GRAYBOL OIL CORPORATION

BY: Lyman C. Dennis
Lyman C. Dennis, Geologist

STATE OF OKLAHOMA

COUNTY OF TULSA

Subscribed and sworn to the 16th day of August, 1966.

My Commission Expires October 2, 1967

Harold E. Miller
NOTARY PUBLIC