


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Stafford County. Sec. 3 Twp. 24 Rge. 11 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner E. K. Edmiston
Lease Name Aitken Well No. # 1
Office Address % Mr. Joe Jacobs Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed yes 19____
Application for plugging approved yes 19____
Plugging commenced 2-5-60 19____
Plugging completed 2-13-60 19____
Reason for abandonment of well or producing formation _____

NORTH

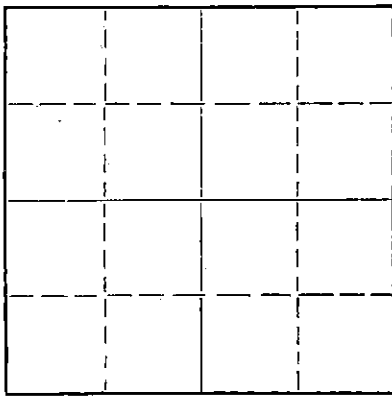

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,137' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		3,028'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging commenced: 2-5-60. Plugging completed: 2-13-60. Measured into total depth: 4,137'. Plugged off bottom: Sanded up to 3965'. Dumped 5 sacks of cement, 8965'-3950'. Worked pipe. Spotted oil: Pumped in 1 load of water and 75 barrels of oil. Pumped plug to 3250' with 800- 500# pressure. Worked and shot pipe. Shot 5 1/2" casing at 3,028'. Pulled and laid down casing. Plugged hole with mud: Squeezed the well with 42 barrels of mud (100' approx.) and 65 sacks of cement (19 5').

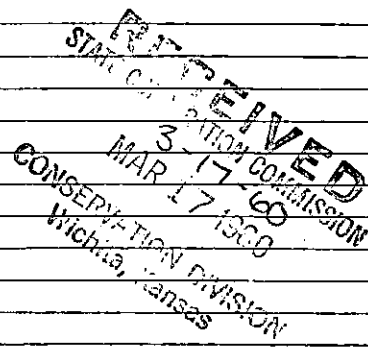

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
Fred W. Mohr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Fred W. Mohr
Box 221, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of February, 1960

My commission expires December 8th, 1963.
Kayann Jenkins Notary Public.


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- HARMS-BURT DRIG. CO. & SUNRAY MID-
Farm- Aitken No. 1 CONTINENT

SEC. 3 T. 24 R. 21W
NE NENE

Total Depth. 4027'
Comm. 2-24-56 Comp. 3-12-56
Shot or Treated.
Contractor.
Issued. 3-2-57

County Stafford
KANSAS



CASING:
8 5/8" 210' w/200 sx cem.

Elevation. 1950' KB

Production. Dry

Figures indicate Bottom of Formations.

sand-clay	165
shale	210
shale-sand	300
red bed	345
shale-sand	475
red bed	863
Anhydrite	890
shale-shells	1020
shale-red bed	1500
lime-shale	1920
lime	2030
lime-shale	2195
lime	2275
shale	2425
shale-shells	2540
shale-lime stks	2690
shale	2955
shale-lime	3335
lime	3490
shale	3580
shale-lime	3620
lime	3890
lime-shale	3975
Conglomerate	3993
lime-chert	4036
chert	4105
shale-sand	4155
lime-shale	4175
lime	4207
Total Depth	

TOPS:
Anhydrite 863
Lansing Kansas City 3628
Viola 3996
Simpson 4120
Arbuckle 4175

TOPS: Scout
Heebner 3471
Brown lime 3613
B/Kansas City 3880
Conglomerate 3983

DST # 1- 3735-3757 Open 45 min.
shut in 20 min. Recl 30' mud.
No BHP

DST # 2- 3950-3993 Open 1 hr.,
shut in 20 min. Rec. 150' GCM.
IFP 230# FFP 270# BHP 1280#.

DST # 3- 4127-4142 Open 70 min.
shut in 20 min. Rec. 200' salt
wtr. IFP 32" FFP 98# BHP 1278#.

Ran Electric logs