

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Pratt County. Sec. 14 Twp. 26S Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines NW 1/4 - NE 1/4 - SW 1/4

Lease Owner Champlin Refining Company

Lease Name Mary E. Moore Well No. 1

Office Address P. O. Drawer #552, Enid, Oklahoma.

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed October 15, 19 49

Application for plugging filed October 17, 19 49

Application for plugging approved (Verbal) October 17, 19 49

Plugging commenced October 18, 19 49

Plugging completed October 22, 19 49

Reason for abandonment of well or producing formation.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. D. Stough, Great Bend, Kansas.

Producing formation Depth to top Bottom Total Depth of Well 4309' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8" OD	865'	None
				5 1/2" OD	4281'	3264' 8"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with rock from total depth to 4250' and set cement plug using 5 sacks of cement. Filled hole with heavy mud from top of plug to 250' and set cement plug using 15 sacks of cement and then filled hole with heavy mud from top of plug to 30' and set cement plug in top using 10 sacks of cement to run plug from 30' to bottom of cellar.

RECORDED

NOV 1 1949 11-1-49

STATE CORPORATION
COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Champlin Refining Company
Address P. O. Drawer #552, Enid, Oklahoma.

STATE OF Kansas, COUNTY OF Barton, ss.

S. P. Hall (employee of owner) or (owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. P. Hall

P. O. Box #167, Ellinwood, Kansas.

(Address)

SUBSCRIBED AND SWORN to before me this 29th day of October, 19 49

N. Kenneth Stivers
Notary Public.

My commission expires October 24, 1951

PLUGGING
FILE SEC 14 T 26 R 14 W
BOOK PAGE 170 LINE 9

CHAMPLIN REFINING COMPANY

MARY E. MOORE # 1

1650' from West Line, 2310' from
South line of Section 14-26s-14w-
Pratt County, Kansas

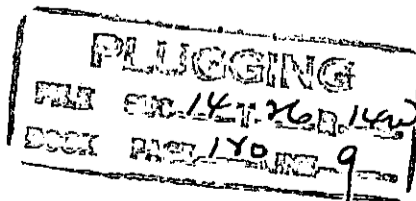
0'	-	155'	Sand
155'	-	435'	Redbeds & sand
435'	-	642'	Redbeds & sand
642'	-	865'	Anhydrite
865'	-	1885'	Anhydrite
885'	-	1485'	Shale & shells
1485'	-	1820'	Shale & Shells
1820'	-	1951'	Broken lime & shale
1951'	-	2085'	Lime & Shale
2085'	-	2190'	Lime & shale
2190'	-	2265'	Lime & shale
2265'	-	2380'	Lime & shale
2380'	-	2445'	Lime & shale
2445'	-	2512'	Lime
2512'	-	2600'	Lime & shale
2600'	-	2675'	Lime & shale
2675'	-	2743'	Shale & shells
2743'	-	2748'	Shale & lime
2748'	-	2813'	Shale & lime
2813'	-	2885'	Shale & shells
2885'	-	2985'	Shale & Lime
2985'	-	3025'	Shale & lime
3025'	-	3092'	Shale & lime
3092'	-	3160'	Broken lime
3160'	-	3250'	Lime & shale
3250'	-	3325'	Lime & shale
3325'	-	3399'	Lime
3399'	-	3423'	Lime
3423'	-	3510'	Lime & Shale
3510'	-	3577'	Lime & shale
3577'	-	3657'	Lime & shale
3657'	-	3708'	Lime & shale
3708'	-	3748'	Lime & shale
3748'	-	3816'	Lime & shale
3816'	-	3858'	Lime & shale
3858'	-	3885'	Lime
3885'	-	3918'	Shale & lime
3918'	-	3963'	Shale & lime
3963'	-	3979'	Lime & chert
3979'	-	4035'	Lime & Shale
4035'	-	4059'	Lime & Shale
4059'	-	4090'	Lime
4090'	-	4132'	Lime
4132'	-	4175'	Lime & shale
4175'	-	4200'	Lime
4200'	-	4242'	Lime & shale
4242'	-	4273'	Lime & chert
4273'	-	4283'	Lime & chert
4283'	-	4295'	Lime, chert & shale
4295'	-	4302'	Lime, chert & shale
4302'	-	4332'	Shale & lime
4332'	-	4350'	Lime, chert & shale
4350'	-	4364'	Lime & chert
4364'	-	4378'	Lime & chert
4378'	-	4390'	Lime & chert
4390'	-	4406'	Lime & chert
4406'	-	4434'	Lime
4434'	-	4457'	Lime & shale
4457'	-	4468'	Lime & shale
4468'	-	4497'	Lime & sand
4497'	-	4530'	Shale & lime
4530'	-		Total Depth

10-18-49

RECEIVED

Conservation Div.

OCT 18 1949

STATE CORPORATION
COMMISSION
KANSAS

Note: Used 90 sacks cement
to plug back from 4530' to
4300' and then redrilled
to 4309' for final total
depth.