

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
of formations.

Stafford County. Sec. 23 Twp. 24S Rge. 13 #6 W (W)

Location as "NE1/4NW1/4SW1/4" or footage from lines. NW1/4 NW1/4 NE1/4

Lease Owner. Group No. 2 Oil Corporation

Lease Name. H. V. Elwell Well No. 1

Office Address. BOX 1267, Ponca City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole). DRY Hole

Date well completed. November 11, 19 44

Application for plugging filed. November 14, 19 44

Application for plugging approved. November 11, 19 44


Plugging commenced. November 11, 19 44

Plugging completed. November 11, 19 44

Reason for abandonment of well or producing formation. DRY Hole

If a producing well is abandoned, date of last production. No production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

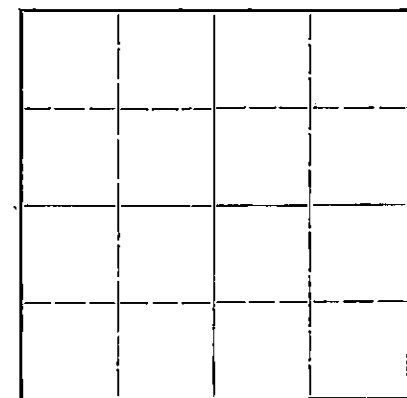

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. Mr. H. W. Kerr, Great Bend, Kansas

Producing formation. Arbuckle Lime Depth to top. 4117' Bottom. 4126' Total Depth of Well. 4126' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
	Surface casing			10 3/4"	450'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Hole was filled with heavy mud to within 300' of the top where a wood plug was set and cemented with 15 sacks of cement; the hole was then filled with heavy mud to within 20' of the top where a second plug was set and capped with 10 sacks of cement.

FILE 23 24 13W
BOOK 1-28

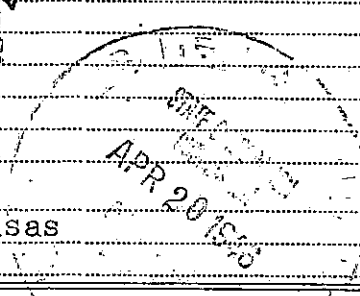

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Mr. F. L. Dunn
Address. R.F.D. #4, Lyons, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
F. L. Dunn (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. L. Dunn

R.F.D. #4, Lyons Kansas (Address)

SUBSCRIBED AND SWORN to before me this 18th day of April, 19 46

Notary Public. Louis McQuinn

My commission expires. October 21st, 1948

W E L L R E C O R D

H. V. Elwell Well No. 1

Date Spudded: October 19, 1944
Drlg. Completed: November 11, 1944
Date Plugged: November 11, 1944

Loc: 330'S and 330'E of N/4
corner of Sec. 23, T24S, R13W,
Stafford County, Kansas

FROM	TO	FORMATION	FROM	TO	FORMATION
0	145	Sand	2464	2785	Lime and shale
145	600	Shale and shells	2785	3035	Lime
600	745	Shale and red bed	3035	3620	Shale and shells
745	770	Anhydrite	3620	3885	Lime
770	1705	Shale & shells	3885	3984	Lime and chert
1705	1900	Lime	3984	4010	Chert
1900	1955	Sand	4010	4079	Lime and chert
1955	2020	Sand and lime	4079	4100	Lime and shale
2020	2185	Lime	4100	4117	Shale
2185	2285	Sandy lime and shale	4117	4126	Lime and shale
2285	2464	Broken lime			

*Was over
Record
for
well*

Elevation 1921'

Top of Arbuckle Lime 4117'

Ran 450' of 10 3/4" OD 40# SVT Grade "C" Seamless casing; set at 446';
cemented with 450 sacks of Portland Ideal cement (Halliburton method).

11-9-44 - Drilled to a total depth of 4126' in Arbuckle Lime; ran drill
stem test with packer set at 4118'; tool open 30 minutes; recovered
320' of water, no oil.

11-11-44 - Plugged and abandoned.

Total Depth 4126' in Arbuckle Lime.

Note: Footages calculated from ground level.

I, the undersigned, being duly sworn upon oath, state that this
Well Record is true, correct and complete according to the records of this
office, and to the best of my knowledge and belief.

F. P. Quinn
District Superintendent

Subscribed and sworn to before me this 18th day of April, 1946.

Quinn Mc Lane
Notary Public

My commission expires October 21st, 1948.

FLD-EHD
4-18-46
Corp. Comm.

33 24 13W
1 28

4-20-46

WELL RECORD

H.V. Elwell Well No. 1

.....

Date Spudded: October 19, 1944
Drig. Completed: November 11, 1944
Date Plugged: November 11, 1944

Loc: 330'S and 330'E of N/4
corner of Sec. 23, T24S, R13W,
Stafford County, Kansas

.....

FROM	TO	FORMATION	FROM	TO	FORMATION
0	145	Sand	2454	2785	Lime & shale
145	800	Shale & shells	2785	3035	Lime
800	745	Shale & red bed	3035	3320	Shale & shells
745	770	Anhydrite	3320	3385	Lime
770	1705	Shale & shells	3385	3984	Lime & chert
1705	1900	Lime	3984	4010	Chert
1900	1955	Sand	4010	4079	Lime & chert
1955	2020	Sand & lime	4079	4100	Lime & shale
2020	2185	Lime	4100	4117	Shale
2185	2285	Sandy lime & shale	4117	4126	Lime & shale
2285	2454	Broken lime			

.....

Elevation 1921'

Top of Arbuckle Lime 4117'

Ran 450' of 10 3/4"OD 40 1/2# S&W Grade "C" Seamless casing; set at 443';
cemented with 450 sacks of Portland Ideal cement (Halliburton method).

11/9/44 - Drilled to a total depth of 4126' in Arbuckle Lime; ran drill
stem test with packer set at 4118'; tool open 30 minutes; recovered
320' of water, no oil.

11/11/44 - Plugged and abandoned.

Total depth 4126' in Arbuckle Lime.

Note: Footages calculated from ground level.

.....

I, the undersigned, being first duly sworn upon oath, state that this
Well Record is true, correct and complete according to the records of this
office, and to the best of my knowledge and belief.

Wm. D. Brown
Assistant District Superintendent

Subscribed and sworn to before me this 21st day of November, 1944.

Louis M. Guire
Notary Public

My commission expires October 21st, 1948.

WAB-HPD
11-21-44
LFC S
TU
Corp. Comm.
File

23 24 13W
139 44

