

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-155-02781-0000

NW SW SE Reno County, Sec. 11 Twp. 23S Rge. 4W (E) (W)

NORTH

		X	

Locate well correctly on above Section Plat

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines... SW SW SE
Lease Owner THE BARNSDALL OIL COMPANY
Lease Name M. Sabin Well No. C-4
Office Address Box 2039, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date, well completed Dec. 22nd, 1934
Application for plugging filed July 31st, 1941
Application for plugging approved August 2nd, 1941
Plugging Commenced Sept. 7th, 1941
Plugging Completed Sept. 11th, 1941
Reason for abandonment of well or producing formation
Not producing in paying quantities
If a producing well is abandoned, date of last production August 18th, 1941
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee
Producing formation Hunton Lime Depth to top 3560' 6" Bottom 3584' Total Depth of Well 3584' feet
Show depth and thickness of all water, oil and gas formations.



OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Hunton Lime	Oil	3560' 6"	3584'	16"	140.78'	None
				13"	597.38'	None
				7"	3554.80'	3157' 4"

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with rock from 3584 to 3560'. Set six sack cement plug at 3560 and mudded to 3245'. Set six sack cement plug at 3245' and mudded to 200'. Set fifteen sack cement plug at 200' and mudded to 16'. Capped with ten sacks cement.

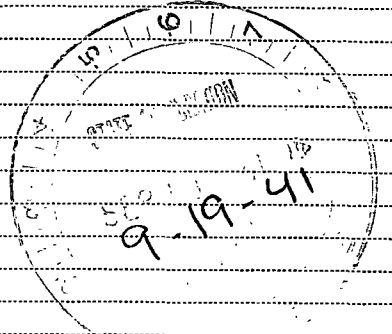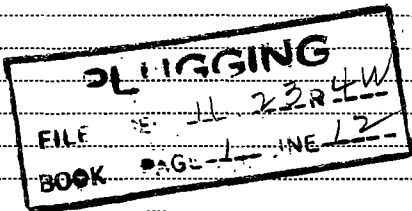

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Barnsdall Oil Company
Address Box 2039, Tulsa, Okla.

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
C. D. MILLER (employee of owner) or (operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *C. D. Miller*

Barnsdall Oil Co., Box 2039, Tulsa, Okla.
(Address)

SUBSCRIBED AND SWORN to before me this 18 day of September, 19 41

Harriet E. Baker
Notary Public.

My commission expires 7-22-43

BARNSDALL OIL COMPANY

LOG RECORD - M. SABIN C-4

15-155-02781-0000

LOCATION:

330' E of W Line & 990' N of S Line
SE/4, Section 11-23-4, Reno Co., Kansas

DRILLED BY: Arrow Drlg. Co

Drilling Comm: 11-20-34

Drilling Comp: 12-22-34

CASING RECORD:

16" OD	70#	8 thd	LW	7 Jts.	140.78'	Set at	149.61'	w/125 Sacks Cement
13" OD	50#	8 thd	LW	31 Jts.	597.38'	Set at	597.38'	w/260 Sacks Cement
7" OD	26&22#	10 thd	SS	115 Jts.	3554.80'	Set at	3560.30'	w/160 Sacks Cement

FORMATION RECORD:

Sand	0	50	Sandy Shale	2379	2480
Sand & Shell	50	175	Shale	2480	2505
Shale	175	450	Lime	2505	2548
Salt	450	485	Shale	2548	2558
Shale	485	525	Lime - K. C.	2558	2914
Shale & Shells	525	580	Top Oolitic Lime	2914	2920
Shale & Lime Shells	580	625	Lime	2920	2985
Lime - Broken	625	650	Shale	2985	2993
Shale & Lime	650	750	Shale & Lime	2993	3093
Shale & Shells	750	840	Shale	3093	3180
Lime - Broken	840	897	Shale & Shells	3180	3226
Lime	897	1015	Shale	3226	3250
Shale	1015	1035	Chat	3250	3276
Lime - Hard	1035	1050	Broken Chat	3276	3316
Shale	1050	1390	Chat	3316	3386
Shale & Lime Shells	1390	1480	Chat & Lime	3386	3409
Shale & Shells	1480	1689	Chat	3409	3433
Shale	1689	1769	Lime	3433	3473
Shale & Shells	1769	1870	Shale, hard lime, shells	3473	3508
Broken Lm & Shale	1870	1983	Shale	3508	3512
Lime - Hard	1983	2013	Broken lime	3512	3515
Shale	2013	2085	Lime	3515	3524
Shale & Shells	2085	2165	Shale	3524	3549
Lime	2165	2228	Coring-Top Hunton	3549	3564
Shale & Lime	2228	2301	Lime	3564	3573
Lime - Broken	2301	2354	Shale	3573	3574
Shale	2354	2379	Lime	3574	3579
			Lime & Shale	3579	3584

Total Depth

3584

11 23 4W
3000

