

## WELL PLUGGING RECORD

STATE OF KANSAS  
STATE CORPORATION COMMISSION

**Give All Information Completely**  
**Make Required Affidavit**  
**Mail or Deliver Report to:**  
**Conservation Division**  
**State Corporation Commission**  
**800 Bifft Building**  
**Wichita, Kansas**

OR  
**FORMATION PLUGGING RECORD**

**Strike out upper line  
when reporting plug-  
ging off formations.**

NORTH

Q			

**Locate well correctly on above  
Section Plat**

Stafford	County. Sec. 2	Twp. 24S	Rge. 11	(E) W	(W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. N/2 SW SW 330' N. Line 660' W. line					
Lease Owner. Deep Rock Oil Corporation					
Lease Name. Anna Turner				Well No. 3	
Office Address. Box 1051, Tulsa, Oklahoma					
Character of Well (completed as Oil, Gas or Dry Hole) Oil					
Date well completed.				April 9	19.40
Application for plugging filed.				April 20	19.49
Application for plugging approved.				April 22	19.49
Plugging commenced.				May 25	19.49
Plugging completed.				June 3	19.49
Reason for abandonment of well or producing formation Well went dry					

If a producing well is abandoned, date of last production..... January 1 ..... 19 49  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?..... Yes .....

Name of Conservation Agent who supervised plugging of this well C.D. Stough  
Producing formation Viola Lime Depth to top 3686 Bottom 3802 Total Depth of Well 3802 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

### CASING RECORD

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to .....feet for each plug set.

Filled with mud and crushed rock from 3802' to 3680'.  
Ran 6 sacks cemented, filled up from 3680' to 3644'.  
Filled hole with mud from 3644' to 245'. Set Bridge.  
Crushed rock from 245' to 235'. Ran 20 sacks cement  
from 235' to 195'. Filled with mud from 195' to 70'.  
Ran 70 sacks cement from 70' to base of cellar.

6-14-49

RECEIVED

Conservation-Like

JUN 14 1949

STATE CORPORATION  
COMMISSION  
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to.....Deep Rock Oil Corporation  
Address.....Box 429 Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Lea ss

..... (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Jackson  
 Box 429. Hutchinson Kans.  
 (Address)

SUBSCRIBED AND SWORN to before me this 13 day of June, 1949

My commission expires.

11-26-51

22-287


7-47-10M

PLUGGING  
FILE SEC 27 34 140  
BOOK PAGE 92 LINE 33

Anna Turner #3

Put in 248' of 10 3/4" cemented  
with 250 sacks.✓ Sec. 2 Twp. 24S Range 11W  
Stafford County, KansasPut in 3686' of 7", cemented  
with 400 sacks.

0	140	Sand
140	200	Red Bed
200	250	Shale and shells
250	791	Red Bed and Shells
791	1420	Shale and shells
1420	1589	Lime and shale
1589	1875	Lime
1875	2258	Lime and shale
2258	2305	Lime
2305	2457	Lime and shale
2457	2677	Shale and shells
2677	2743	Lime and shale
2743	3109	Lime
3109	3139	Lime and shale
3139	3159	Lime
3159	3259	Shale and Lime
3259	3290	Shale & shells & Sand
3290	3306	Shale & Shells & Red Bed
3306	3340	Shale - sticky
3340	3345	Shale
3345	3375	Lime
3375	3408	Lime & Chert
3408	3477	Lime
3477	3485	Lime and shale
3485	3568	Lime
3568	3596	Lime and shale
3596	3640	Lime
3640	3685	Lime and shale
3685	3692	Sand
3692	3700	Shale
3700	3765	Dolomite & Cherty Lime
3765		Total Depth
3765	3783	Hard cherty Lime (Drilled Deeper)
3783	3788	White Lime med. Hard
3788	3793	Lime soft
3793	3795	Lime very soft
3795	3797	Gray sand soft
3797	3799	Lime gray hard
3799	3801	Lime brown soft
3801	3802	Lime hard gray
3802		New Total Depth

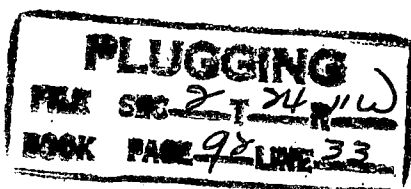

RECEIVED

Conservation Div.

APR 22 1949

STATE CORPORATION  
COMMISSION  
KANSAS