


15-079-19053-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

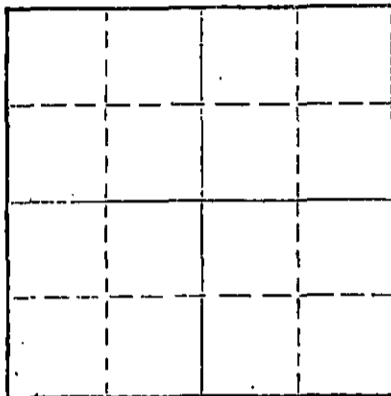

Locate well correctly on above
Section Plat

Harvey County, Sec. 18 Twp. 23 Rge. 3 W(E) (W)
Location as "NE/CNW&SW" or footage from lines NE NE SW
Lease Owner K & P Oil Company
Lease Name Sabin Well No. C-2
Office Address P.O. Box 559 Tulsa, Oklahoma 74101
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 19
Application for plugging filed Aug 19 73
Application for plugging approved Aug 19 73
Plugging commenced Aug 28 19 73
Plugging completed Sept 4 19 73
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Depth to top Bottom Total Depth of Well 3320' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|------|--------|------------|
| | | | | 7" | | 2,405' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3320' to 3275'. Dumped 6 sx of cement. Mudded hole to 260'. Made 15' of rock bridge. Dumped 5 Yrds of Ready-Mix Cement, filling to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
SEP 7 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of September, 1973

My commission expires January 5, 1974

Judy Lamb
Notary Public.

WENDELL S. JOHNS
 PETROLEUM GEOLOGIST
 600 BITTING BUILDING
 WICHITA 2, KANSAS

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 15 1973
 CONSERVATION DIVISION
 Wichita, Kansas
 May 3, 1949.

K. & P. Oil Company
 c/o Louis Kahan
 P.O. Box 682
 Tulsa, Oklahoma

15-079-19053-0000

Geological Report: Kahan #2 Sabin "C"
 NE/NE/SW; 18-23S-3W
 Harvey County, Kansas
 Elevation:
 Contractor: Murfin Drilling Co.

Gentlemen:

The #2 Sabin "C" was spudded April 16, 1949, and drilled to 3320 with rotary tools. This report includes only that part of the hole below 2900 feet. Mr. James Daniels watched the upper part of the hole and will make a report on it.

The following is a list of formation tops and other data of interest. Unless otherwise noted all data is from my sample log which has been corrected for sample lag by use of the time log. All measurements are from the rotary bushing which is three feet above the derrick floor. As of this date no actual elevation has been run on this well. An estimated elevation of 1465 has been used to secure an approximate depth below sea level on the Mississippi limestone.

| <u>Formation Name</u> | <u>Depth below Surface</u> | <u>Depth below Sea Level</u> | <u>Remarks</u> |
|------------------------|----------------------------|------------------------------|--|
| 10 3/4" surface casing | 313 | | 200 sacks cement |
| Perous zone in Lansing | 2918 - 27 | | Fair perosity, no odor or stain |
| Base Kansas City | 2997 | | |
| Marmaton | 2997 - 3284 | | |
| Top Mississippi | 3284 | -1819 | |
| (1) Porous zone | 3296 - 3302 | | Delemitic limestone, some perosity, fair odor and oil stain. |
| (2) Porous zone | 3304 - 10 | | Mostly chert. Fair oil show and odor |
| (3) Porous zone | 3315 - 20 | | Cherty limestone, fair perosity, good odor & stain |
| Rotary Total Depth | 3320 | | |

There were a number of zones of fair perosity in the Lansing-Kansas City section but none of them contained any oil stain. The electric log indicates probably water in all of them.

F O R M A T I O N L O G

Kahan #2 Sabin "C"
NE/NE/SW; 18-23S-3W
Harvey County, Kansas

Note: All measurements are from the top of the rotary bushing which is 3 feet above the derrick floor. This log includes only the hole from 2900 to total depth.

| <u>Depth</u> | <u>Formation Description</u> | <u>Remarks</u> |
|--------------------|---|-----------------------|
| 2900 - 08 | Limestone, gray to black, finely crystalline | |
| 2908 - 18 | Limestone as above, with shale streaks | |
| 2918 - 27 | Limestone, gray oolitic and oolitic, good porosity, no show. | |
| 2927 - 2950 | Limestone, gray to tan finely crystalline | |
| 2950 - 53 | Shale, black | |
| 2953 - 60 | Limestone, dark gray to brown, sub-crystalline to dense. | |
| 2960 - 82 | Limestone, white to tan crystalline, trace porosity, no show | |
| 2982 - 97 | Limestone, brown to black, crystalline to dense | Base Kansas City 2997 |
| 2997 - 3012 | Shale, gray and brown | |
| 3012 - 30 | Shale with limestone streaks | |
| 3030 - 40 | Shale, gray | |
| 3040 - 3167 | Shale, gray, green and brown with limestone streaks | |
| 3167 - 3214 | Shale, gray and brown | |
| 3214 - 16 | Limestone, tan dense to green dense hard | |
| 3216 - 65 | Shale, green, with some gray and brown | |
| 3265 - 84 | Shale yellow and purple, pyrite and trace chert streaks sand and limestone | |
| 3284 - 96 | Limestone, white crystalline to coarsely crystalline | Top Mississippi 3284 |
| 3296 - 3302 | Dolomitic limestone sucrose. Trace porosity | Fair odor and stain |
| 3302 - 04 | Limestone, as above | |
| 3304 - 10 | Much chert, white devitrified, gray vitreous, some dolomitic limestone, some porosity | Fair odor and stain |
| 3310 - 15 | Limestone, white crystalline, cherty | |
| 3315 - 20 | Brown to white dolomitic chert and cherty limestone | Good odor and stain |
| Rotary total depth | 3320 | |

Samples examined and log compiled by Wendell S. Johns.