


15-009-00845-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

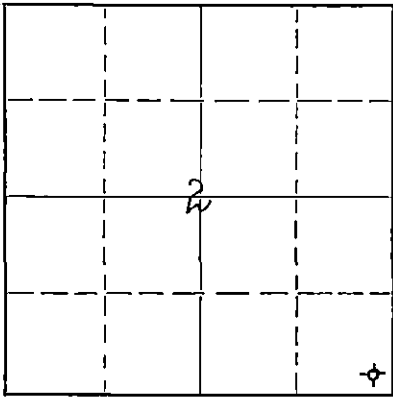

Locate well correctly on above Section Plat

Barton County. Sec. 2 Twp. 16 Rge. 11 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE. SE. SE.
Lease Owner Shields & Anschutz
Lease Name D. J. Miller Well No. 1
Office Address Box 248 Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9-14-50 19
Application for plugging filed 9-14-50 19
Application for plugging approved 9-14-50 19
Plugging commenced 9-14-50 19
Plugging completed 9-15-50 19
Reason for abandonment of well or producing formation Non-productive

If a producing well is abandoned, date of last production --- 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes


Name of Conservation Agent who supervised plugging of this well C. D. Stough Great Bend, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3332 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	165	173	8 5/8	189'	cmtd. 125 sax
Arb	---	3323	3332	not cased		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Hole filled with Heavy Mud
Plug @ 185' cmtd. 15 sax hand mixed cement
Top plug @ 30' hand mixed cement
Cut pipe belowgr.

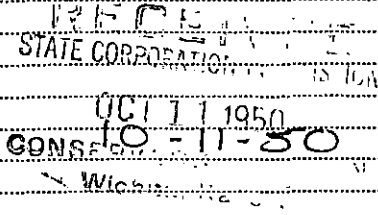

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to Shields & Anschutz
Address Box 248
Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, SS.
Richard L. Shields (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard L. Shields
Box 248 Russell, Ks. (Address)

SUBSCRIBED AND SWORN to before me this 14th day of Sept., 1950
Jessie Lee Turner Notary Public.

My commission expires July 18, 1953

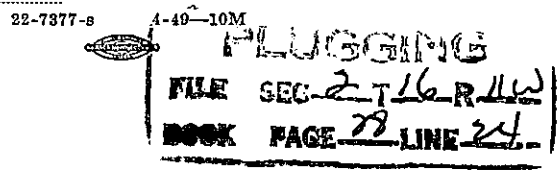

WELL LOG

15-009-00845-0000

SHIELDS & ANSCHUTZ
D. J. Miller #1

SE SE SE
Section 2mTwp 16, Rge 11
Barton County, Kansas

Total Depth: 3332'
Commenced: September 3, 1950
Completed: September 14, 1950
Drilled by Honaker Drlg. Co., In.

DASING RECORD

Size	Run	Pulled
8 5/8"	192' @ 189'	Cemented w/ 125 sax

Elevation: 1823 DF 1821 Gr 1826 KB
Treatment:
Production: Dry & Abandoned

----- Figures Indicate Bottom of Formations -----



Surface Clay & Ls	45
Sh & Pyrite	165
Sand	173
Sh	189
Sh & shells	250
Sand	285
Sh & shells	550
Red bed	640
Anhydrite	680
Sh & shells	1478
Ls	1655
Ls & Pyrite	1725
Sh & Ls	2570
Sh & shells	2605
Ls	2650
Ls & sh	3000
Ls	3300
Cong	3323
Ls	3332 TD

TOPS

Topeka	2604'
Heebner	2860'
Lans KC	2967'
Arb	3323'

NOTES

DST 3324-32
Rec. 7' slightly oil-cut mud
920# BHP

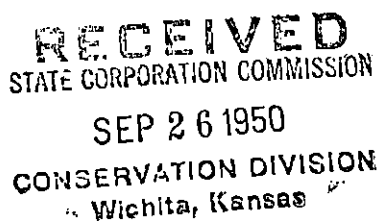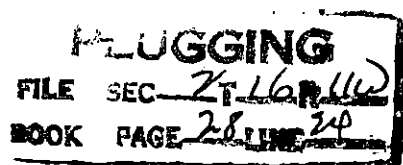

DRILLERS LOG

15-009-00845-0000

Operator: Shields & Anschutz

Contractor: Honaker Drilling Co., Inc.

Lease: D. J. Miller #1

	From	To
Surface Clay & Lime	0	45
Shale & Pyrite	45	165
Sand	165	173
Shale	173	189

Run 9 joints 192' of 8-5/8" surface casing, set at 189', cemented with 125 sacks cement and 200# CaCl.

Cement & Plug	168	189	
Shale & Shells	189	250	
Sand	250	285	
Shale & Shells	285	550	
Red Bed	550	640	
Anhydrite	640	680	
Shale & Shells	680	1478	
Line	1478	1655	
Line & Pyrite	1655	1725	
Shale & Lime	1725	2570	
Shale & Shells	2570	2605	
Lime	2605	2650	
Line & Shale	2650	3000	
Line	3000	3300	
Conglomerate	3300	3323	
Line	3323	3332	T. D.

COMPANY TIME WITH DRILL PIPE

9-11-50	Circulating	1	Hr.	
9-12-50	Circulating	1	Hr.	
9-13-50	Circulating	5	Hrs.	39 Min.
9-14-50	Testing	11	Hrs.	
		18	Hrs.	39 Min. @ \$16.66 per hr.

(Above depths are Rotary Bushing Measurements, less 4' to Ground Level)

The foregoing is true and correct to the best of my knowledge.

HONAKER DRILLING CO., INC.

RECEIVED
STATE CORPORATION COMMISSION

OCT 11 1950

CONSERVATION DIVISION
Wichita, Kansas

