

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Finney County. Sec. 7 Twp. 24 Rge. 34 (X) (W)

Location as "NE/CNW/SW" or footage from lines SE/4, NW/4, SE/4

Lease Owner Pan American Petroleum Corporation

Lease Name Crawford Gas Unit "A" Well No. 1

Office Address P. O. Box 432, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed _____ 10-15 1949

Application for plugging filed Rec'd 1-4-68 12-12 1967

Application for plugging approved JAN 4 1968 12-13 1967

Plugging commenced _____ 12-26 1967


Plugging completed _____ 12-26 1967

Reason for abandonment of well or producing formation _____

Economically Depleted

If a producing well is abandoned, date of last production May 1963

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

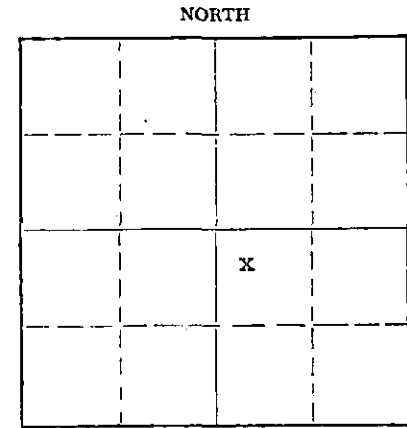

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well E. Eves

Producing formation Chase Series Depth to top 2446 Bottom 2610 Total Depth of Well 2650 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Herrington - Krider	Gas-Depleted	2446	2490	10-3/4	827	None
Winfield	Gas-Depleted	2512	2532	7	2638	None
Towanda	Gas-Depleted	2560	2594			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Halliburton pumped in 364 sack Pozmix cement at maximum pressure of 500 psig. 7" casing filled to ground level. Dug out to 4' below ground cut off head and welded steel plate on 10-3/4" casing.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Company

Address Duncan, Oklahoma

STATE OF Kansas COUNTY OF Seward, ss.
I, C. R. Hamm (employee of owner) or (~~owner or operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C R Hamm

Box 432, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3 day of January, 1968

My commission expires February 11, 1968

Rud Banks
Notary Public.

STANOLIND OIL AND GAS COMPANY WELL RECORD

SUPPLEMENTAL
(ENTER "X" WHEN APPLICABLE)

LEASE Crawford Gas Unit A WELL NO. 1

LOCATION OF WELL: 3530 FT. NORTH SOUTH OF THE NORTH SOUTH LINE AND 1640

EAST WEST OF THE EAST WEST LINE OF THE 5E $\frac{1}{4}$ 0E $\frac{1}{4}$ 0E

OF SECTION 7 TOWNSHIP 24 NORTH SOUTH RANGE 34 EAST WEST

Finney COUNTY Kansas STATE

ELEVATION: 2922

COMPLETED AS: OIL WELL GAS WELL WATER WELL DRY

DRILLING: COMMENCED 8-21 19 49 COMPLETED 10-15

LOCATE WELL CORRECTLY

OPERATING COMPANY Stanolind Oil and Gas Company ADDRESS Box 591, Tulsa, Oklahoma

OIL OR GAS SANDS OR ZONES

NAME	FROM	TO	NAME	FROM	TO
<u>1</u> <u>Herrington-Krider</u>	<u>2446</u>	<u>2490</u>	<u>4</u> <u>Pt. Riley</u>	<u>2523</u>	<u>2550</u>
<u>2</u> <u>Winfield</u>	<u>2512</u>	<u>2532</u>	<u>5</u>		
<u>3</u> <u>Towanda</u>	<u>2560</u>	<u>2594</u>	<u>6</u>		

JAN 4 1968
1-4-68

WATER SANDS

NAME	FROM	TO	WATER LEVEL	NAME	FROM	TO	WATER
<u>1</u> <u>None</u>				<u>3</u>			
<u>2</u>				<u>4</u>			

CASING RECORD (OVERALL MEASUREMENT)

CSG. SIZE	WEIGHT	DESCRIPTION		QUANTITY FEET
		THREADS	MAKE - GRADE	
<u>10-3/4</u>	<u>34.24</u>	<u>57</u>	<u>2M</u>	<u>827</u>
<u>7</u>	<u>20</u>	<u>820</u>	<u>J-55</u>	<u>2638</u>

LINER-SCREEN RECORD

SIZE	QUANTITY FEET	SET AT		MAKE AND TYPE
		TOP	BOTTOM	

PACKER RECORD

SIZE	LENGTH	SET AT	MAKE AND TYPE

CEMENTING RECORD

SIZE	WHERE SET FEET	CEMENT			METHOD	FINAL PRESS
		SACKS	BRAND	TYPE		
<u>10-3/4</u>	<u>815</u>	<u>500</u>	<u>Monarch</u>	<u>Bulk</u>	<u>5000</u>	
<u>7</u>	<u>2624</u>	<u>1100</u>	<u>Lehigh</u>	<u>Bulk</u>	<u>5000</u>	

MUDDING RECORD

(CABLE TOOLS)	
METHOD	RESULTS

WHAT METHOD WAS USED TO PROTECT SANDS WHEN OUTER STRINGS WERE PULLED?

WERE BOTTOM HOLE PLUGS USED?

IF SO, STATE KIND, DEPTH SET, AND RESULTS OBTAINED.

ROTARY TOOLS WERE USED FROM 0 FEET TO 2550 FEET, AND FROM for completion FEET TO 2650 FEET

CABLE TOOLS WERE USED FROM _____ FEET TO _____ FEET, AND FROM _____ FEET TO _____ FEET

24-HOUR PRODUCTION OR POTENTIAL TEST

20 bln. flow down WATER _____ BBLs.
2929 120 415
IF GAS WELL, CUBIC FEET PER 24 HOURS _____ SHUT-IN PRESSURE _____ LBS. PER SQUARE IN.

I, THE UNDERSIGNED, BEING FIRST DULY SWORN UPON OATH, STATE THAT THIS WELL RECORD IS TRUE AND CORRECT ACCORDING TO THE RECORDS OF THIS OFFICE AND TO THE BEST OF MY KNOWLEDGE AND BELIEF.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 4th DAY OF December 1949.
MY COMMISSION EXPIRES _____
NAME AND TITLE: W. M. [Signature]
NOTARY PUBLIC: Ben Banks

