


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barton County, Sec. 17 Twp. 16 Rge. 11 (E) W (W)
Location as "NE/CNW/SW" or footage from lines. SW SW NW

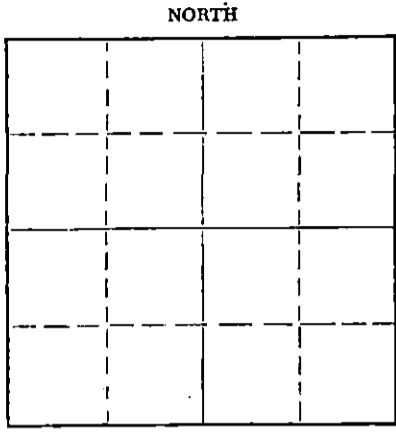

Locate well correctly on above Section Plat

Lease Owner. Great Bend Pipe & Supply Company, Inc.
Lease Name Oeser Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 8-24-65 19
Plugging completed 8-31-65 19
Reason for abandonment of well or producing formation Depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Depth to top Bottom Total Depth of Well 3325 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	360'	None
				4-1/2"	3312'	XXX 1834'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded hole to 2910' and dumped 4 sacks of cement @ 2910' with dump bailer. Pulled 4 1/2" casing, bailed hole to 300', set rock bridge to 290' and dumped 25 sacks of cement @ 290'. Mudded hole to 30', set rock bridge and ran 10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
SEP 8 1965
9-8-65
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of September, 1965


My commission expires May 20, 1968
Milton J. Volin Notary Public.

SHELL OIL CO., INC.
F.F. Oesser No. 1.

SEC. 17 T. 16 R. 11W
NW 1/4
330' fr S & W Lines NW 1/4

Total Depth. 3325'
Comm. 11-4-39 Comp. 12-3-39
Shot or Treated.
Contractor.
Issued. 1-20-40

County. Barton



CASING:
8 5/8" 360'
4 1/2" 3312'

Elevation.

Production. Pot. 4031 B.
Echometer, No wtr

Figures indicate Bottom of Formations.

shale & shells	55	Established indicated
sand & shale	210	capacity of 4031 bbls
sand, shale, red bed	360	oil & no wtr by fluid
red rock & shale	708	level (echometer) test
anhydrite	736	or allowed daily
shale & shells	1145	potential of 3000 B.
shale & salt	1361	
shale & shells	1477	
shale & lime	1845	
lime brkn	1852	
lime	1968	
lime brkn	2036	
shale & lime	2624	
2624=2632 SL Corr.		
shale	2668	
lime	2774	
chert	2779	
lime	2890	
lime brkn	2918	
lime	2966	
lime brkn	3032	
shale	3087	
lime	3202	
3202=3203 SL Corr.		
lime	3302	
conglomerate, chert, shale gray to green grey & sand	3312	
dolomite	3316	
3316=3314 SL Corr.		
dolomite & sand	3321	
dolomite	3325	
Total Depth.		

RECEIVED
STATE CORPORATION COMMISSION
SEP 14 1965
CONSERVATION DIVISION
Wichita, Kansas

Top Arbuckle dolomite 3311
SL Corr.

- 2859-69 good porosity & fair to good oil stain
- 2866-89 some porosity & oil stain
- 2932-41 lgt oil stain
- 3029-42 very spotted porosity & oil staining
- 3096-3103 fair to good porosity, very spotted fair oil stain
- 3114-27 porous, fair to good oil stain, slightly spotted
- 3134-41 porous, trace oil stain, probably wtr bearing
- 3168-91 lime wh to lgt brown, scattered fair porosity & slight oil stain in oolitic lime
- 3200-14 fair porosity, very spotted slight oil stain
- 3312-13 some porosity & oil stain
- 3313-15 fair to good porosity & oil stain